Aalto University
School of Science
Master's Programme in Computer, Communication and Information Sciences

Scope Attribution for Static UI Transition Graph Extraction in Single-Page Applications

Duy Khanh Tran

Master's Thesis
Espoo, October 31, 2026

Supervisor: Prof. Petri Vuorimaa
Major: Computer Science

Draft of 29 October 2026. Seven chapters and one appendix. Every figure is re-measured on the commit named in the generated tables. The preamble is a preview; the official Aalto thesis class is applied before submission.

Abstract

A UI transition graph describes the screens of an application and the transitions a user can cause between them. Static extraction of such graphs is well established for Android, where each event handler can be attributed to the widget that registered it and thus to a single window. For web applications, navigation models have been built at design time, extracted statically from server-rendered applications, or obtained by crawling a running application. Earlier work extracts them statically from a client-side application's route declarations for three different purposes — model checking, restricted to applications that declare no nested routes, no route parameters and no data-bound navigation; end-to-end test generation; and access-control checking — and in none of the three did this review find a measurement of what the extraction fails to read.

This thesis measures static extraction on six open-source Angular applications with 14 declared route entries to more than nine hundred, using a pinned corpus and five evaluation methods, four reading the applications' sources and one the running application. Measured at two levels, the extractor mints a node for every screen the route configuration declares, as two independent static readers enumerate it, and recovers none of the navigation constructs as a deterministic transition once a navigation that runs under a condition is demoted, as the soundness property requires; before the defects this thesis identifies were repaired, two of the six yielded a list of routes with no transitions at all. The node result is bounded by what a reader of the route table can enumerate: a runtime probe that visits every address the applications answer finds 251 mounted addresses with no node, 242 of them in a single application, and only 2 of the six are exact against it.

Every lost construct is assigned to one defect class. Attribution is the largest class in every application of the corpus once the node-level defects this thesis identifies are repaired. In a web application, a navigation site frequently has no single owning screen: it may be located in a shared component, in an injected service, or in a route guard. The thesis formulates attribution as a dataflow analysis over a lattice of screen sets, specified as a fixpoint over four input relations: component nesting, router outlets, a call graph that takes dependency injection into account, and a dispatch relation. The prototype implements the first two, for which the fixpoint reduces to reachability, and stands in for the other two with approximations it never reports as deterministic. It states a soundness property for the deterministic tier and tests it mechanically rather than proving it. Four corrections, each hidden by the one before, take that tier from the 1024 edges an earlier instrument published to none: the last finds every one of the 20 edges the first three left running under a condition

— after a request returns, in a branch, under a template condition — so the property holds on this corpus only because it ranges over nothing. The implemented part is evaluated on the same corpus. What it adds beyond the mechanism earlier work already has is small and measured: router-outlet descent leaves the number of placed sites unchanged on 6 of the six applications, the injected-service join places 29 more, 1.7 % of the corpus total, and the width they buy is checked in both directions on one application only. With attribution, 62.6 % of the constructs that loss class holds are recovered, on every application in the corpus, all of it navigation the graph reports as possible rather than certain. On the one application small enough for the screens each navigation site fires from to be read off the sources by hand, the computed sets are right about 97.3 % of those attributions. Most of that is not new: attributing what the root component renders to every screen, which earlier work already does, reaches 94.7 % of them and attributes nothing the application does not, while every wrong attribution any level makes comes from a rule this thesis adds. On the other five applications the sets are checked in one direction only, which is the work's sharpest limitation.

Mutation testing on three of the applications shows that the graph detects 59 of 64 injected source changes, against 42 of 53 without attribution. Those two sets are not the same, because a change to a construct the baseline graph holds no edge for cannot be scored against it; on the 49 mutants both graphs can score, the figures are 44 and 40. Attribution therefore raises both the number of changes that can be scored at all and, by the smaller paired margin, the rate at which a scored change is detected.

Finally, the thesis asks whether the losses belong to the applications or to the tool. Each defect class is taken to its root cause and repaired where the cause is the extractor's. Almost every defect class turned out to be a construct the extractor could read and did not, and the exception is instructive: one application computes a route's path in a custom matcher function, which no reader of a route table can resolve. With the readable classes repaired, 6 of the six hold a node for every screen the static readers find declared, 2 of the six hold one for every address the running application answers, and 98.5 % of the navigation sites that remain in scope are accounted for, as a transition, as a destination only the run time knows, or as a source the analysis cannot place; the sites excluded from that scope, and the ground for each exclusion, are counted in Chapter 5. Every site that remains names its reason. Some of those reasons are dead links the graph finds without running the application, though the count of them is a candidate list: a route the tools fail to read is indistinguishable from one the application never declares. No deterministic tier survives this scrutiny: the transitions earlier instruments called certain were transitions into the screens a user reaches before authenticating, and every one of them runs only once something has happened, because an application that guards its interior has no unconditional transition to find.

Keywords: static analysis; UI transition graph; single-page application; Angular; dataflow analysis; program analysis; software testing

Use of AI tools

Aalto University asks that the use of artificial intelligence tools in a thesis be declared. An AI coding assistant was used in three ways in this work, and I am responsible for the whole of the result.

The extractor under study and the evaluation harness were written with the help of an AI coding assistant. Every number reported in this thesis is produced by running that harness, and the result tables and plots of Chapter 5 are generated from its result files, except the two tables marked as compiled by hand, so that any number can be reproduced from the commits recorded with it. The diagrams in Chapters 1 to 4 were drawn by hand.

The assistant was also used during the literature search, to locate candidate sources and to summarise them. No source is cited on the strength of such a summary. Every entry in the bibliography was checked field by field against the publisher page, Crossref metadata, arXiv metadata or DBLP before it was cited, and sources that could not be checked in this way are kept in a separate block in the bibliography file and are not cited anywhere in the text.

Finally, the assistant was used to draft and edit prose, which I then revised. The research questions, the design of the analysis, the evaluation protocol and the interpretation of the results are my own, as is the responsibility for every claim made here.

Contents

Abstract **1**

Use of AI tools **3**

1 Introduction **7**

1.1 Motivation 7
1.2 Research questions and scope 9
1.3 Thesis structure 11

2 Background **13**

2.1 UI transition graphs 13
2.2 Static extraction for Android 14
2.3 Navigation models for web applications 15
2.4 Dynamic state models for single-page applications 15
2.5 Formal foundations 17
2.5.1 Modal transition systems 17
2.5.2 Soundiness 17
2.5.3 Dataflow analysis and abstract interpretation 18
2.6 Static analysis of JavaScript and TypeScript source 18
2.6.1 Analyses over a source-level syntax tree 19
2.6.2 Abstract interpretation of JavaScript 19
2.6.3 What TypeScript's types contribute 19
2.6.4 Frameworks, not the language, are the obstacle 20
2.7 Angular routing, dependency injection and reactive state 20
2.7.1 Routes 21
2.7.2 Components and templates 22
2.7.3 Navigation sites 22
2.7.4 Dependency injection 22
2.7.5 Reactive state 24
2.8 Reactive programming and the limits of static dataflow 24

2.8.1 Propagation order and glitch freedom . . . 24
2.8.2 Reactive code and the tools developers have . . . 25
2.9 Mutation testing . . . 25
2.9.1 The coupling effect . . . 26
2.9.2 Mutation for JavaScript and web applications . . . 26
2.9.3 Reporting a mutation experiment . . . 27
2.10 The gap . . . 27

3 Static navigation analysis and scope attribution 31
3.1 Graph model and soundness . . . 31
3.2 Scope attribution . . . 34
3.2.1 The defect being addressed . . . 35
3.2.2 Scope . . . 35
3.2.3 Input relations . . . 38
3.2.4 Guards as program points . . . 38
3.2.5 Boundary . . . 39
3.2.6 Anchored edges . . . 39
3.3 Implementation . . . 40

4 Evaluation setup and research material 43
4.1 Corpus selection and validity . . . 43
4.1.1 Selection . . . 43
4.1.2 Validity of an open-source corpus . . . 44
4.2 Metrics . . . 45
4.3 Evaluation methods . . . 49
4.3.1 Preconditions . . . 52
4.3.2 Corrections made to the protocol . . . 53
4.3.3 Reproducibility . . . 55

5 Results 56
5.1 The two levels of loss (RQ1) . . . 56
5.2 Which failure is worth an analysis (RQ2) . . . 57
5.3 Scope attribution (RQ3) . . . 61
5.3.1 Whether the scopes are right . . . 65
5.3.2 What the attribution discriminates . . . 66
5.3.3 What each mechanism contributes . . . 67
5.3.4 Whether the scopes are the right ones . . . 68
5.4 Change sensitivity (RQ4) . . . 71

5.5 What the repairs cost the claim (RQ5) . . . 74
5.5.1 What the losses were . . . 75
5.5.2 What it cost the soundness property . . . 77
5.5.3 What is minted at an address the application does not mount 80
5.6 Dead links, found without running anything . . . 83

6 Discussion 85
6.1 Key findings . . . 85
6.2 Limitations and threats to validity . . . 88
6.3 Declared approximations . . . 93
6.4 Transfer to other frameworks . . . 97
6.5 Future work . . . 99

7 Conclusion 102

A Validating the measurement 106
A.1 Nodes the two static readers disagreed about . . . 106
A.2 How the declared-screen set moved . . . 108
A.3 Every remaining site names a reason . . . 110
A.4 The four dead-link corrections . . . 110
A.5 Asking the running framework . . . 114
A.5.1 How the framework was asked . . . 114
A.5.2 What the framework mounts and the extractor does not . . . 115
A.5.3 Nothing is missing that was not declared . . . 116
A.6 What a route table's evidence does not establish . . . 117

Bibliography 121

Chapter 1

Introduction

A user interface transition graph is a model of an application in which the nodes are the screens a user can see and the edges are the transitions a user action can cause between them. For each edge, the graph records the event that triggers it, the condition under which the transition is available, and the screen it leads to. A graph of this kind makes it possible to answer questions that are difficult to answer from the code alone, for example which screens are reachable from a given screen, or which parts of the user interface are affected when a particular component changes.

Transition graphs have been used in automated testing for a long time. In the Android domain they are used for test generation and for guiding exploration [79, 39, 14], and in web testing they form the basis of crawling-based test derivation [50, 51]. They are also useful for change impact analysis [4, 12], because each transition can be traced back to the code that implements it, and from there to the tests that cover it.

1.1 Motivation

There are two general ways to obtain a transition graph. A dynamic approach executes the application and records the states and transitions it observes. A static approach reads the source code and derives the graph without running anything. Their limitations differ. A dynamically built graph contains only the states the crawler managed to reach, which depends on the available test data, authentication, and the exploration budget, and the graph has to be rebuilt for every new version. A statically built graph covers everything the source declares and can be recomputed on each commit without a running system, but it is limited to what can be decided from the source, and it must over-approximate wherever a target cannot be resolved.

For Android, static extraction is a well-established technique. The window transition graph work derives windows and the transitions between them from bytecode, and resolves the control flow of callbacks to the widget that registered each handler [79, 78, 77]. For the web, navigation models have been extracted statically from server-rendered frameworks, in which pages and links are declared in templates and configuration files [62, 9, 69]. Modern single-page applications, however, have almost always been modelled by executing them. Crawljax builds its state flow graph by firing events against the DOM of a running application [50], and later

tools in the same line improve the exploration strategy without changing where the model comes from [51, 74]. A survey of web testing published in 2025 collects the model-based tools of the past decade [36]. Of the tools it lists, every one whose model construction was examined for this thesis builds that model by executing the application. Static analyses of a modern client-side framework are few. One builds a component dependency graph for React and does not address routing [38]. Three extract navigation, each for a different consumer: one from Angular in order to model-check it, accepting only applications that declare no nested routes, no route parameters and no data-bound navigation [56]; one from Angular sources in order to enumerate the workflows a generated end-to-end suite should cover [64]; and one from the compiled JavaScript bundle of a single-page application in order to check an access-control policy against the screens it can reach [82]. Section 2.4 compares them with the work reported here.

When the dynamic approach was developed, a single-page application had no declarative route table, so the DOM was the only thing to observe (Section 2.4). Client-side routing frameworks changed this. Angular, React Router and Vue Router all declare routes as data in the source code, connect navigation to those routes through template attributes and service calls, and attach guards to routes as named functions [26]. The artefact needed for static analysis now exists, but how well static extraction works on real applications built with these frameworks, and where it fails, has not been measured.

A statically extracted graph also has consumers outside model-based testing. Tools that drive a graphical user interface with a large language model explore an application without any model of its navigation structure. GPTDroid treats mobile GUI testing as a question-and-answer loop, passing the current screen to the model and replaying the action it returns, and reports higher activity coverage and more bugs than the best baseline on 93 applications [46]. AutoDroid gives the model application-specific knowledge in addition to its commonsense knowledge, and obtains that knowledge by automated dynamic exploration [73]. LLMDroid uses the model to guide exploration towards coverage the test run has not reached [70]. The approach has been applied to web interfaces with a vision-language model and curiosity-driven exploration [72], and a survey of large language models in software testing covers the wider area [71]. Coding agents lack the same kind of structure one level up, where the context is a repository rather than a screen: the SWE-bench issues typically require coordinated edits across functions, classes and files [31], agent performance depends strongly on the interface through which the repository is navigated [76], and retrieving code from elsewhere in the repository improves completion over an in-file baseline [81]. A graph that states which screens an application has and which transitions connect them is one source of such structure, and it can be produced without running the application.

This thesis carries out that measurement for Angular and proposes an analysis for the largest class of failures it finds. What is proposed is a method rather than a product: scope attribution is stated as a dataflow analysis over a lattice of screen sets, and nothing in its formulation depends on a particular extractor.

A method of this kind cannot be assessed without being instantiated, because the

questions asked here are empirical: how much of the navigation in real applications it recovers, where it fails, and whether the resulting graph responds to a change in the source. The instrument used is *uigraph*, an open-source static analyser for Angular that I developed before this work began. It plays the part the subject of study plays in an experiment, not the part of a result: the figures reported here describe what the analysis recovers when realised this way, and the limits they expose are limits of the method and of this instantiation, which Chapter 6 separates.

1.2 Research questions and scope

The thesis addresses five research questions. The exact measures are defined in Section 4.2.

RQ1. *How much of the navigation in Angular applications can static analysis recover as deterministic transitions?*

This is measured at two levels, because a transition cannot be recovered without the screens it runs between. The first is node coverage: the fraction of the screens an application declares that the graph holds a node for. The second is the fraction of navigation constructs in the source code that are witnessed by at least one deterministic (*must*) transition. The first bounds the second, and Chapter 5 reports both, with the warning Section 6.2 carries: refusing to read part of an application raises its reported node coverage, so the figure means nothing apart from the list of what was not read.

RQ2. *Where does static extraction fail, and why?*

The observed failures are grouped into defect classes. A class is accepted only if at least two independent lines of evidence confirm it, of which at least one comes from one of the evaluation methods of Section 4.3. Chapter 5 reports, for each class, which of its confirmations are methods and which are observations, because the two are not equally strong. Each construct that is not recovered is then assigned to one class, so the classes can be compared by size within each application.

RQ3. *How does scope attribution affect the coverage and precision of static navigation analysis?*

Scope attribution is the analysis proposed in this thesis. For a navigation site that does not belong to any single screen, it computes the set of screens from which the site can be triggered. One commit of the instrument is run twice on the same inputs, with the attribution pass disabled and enabled, so that nothing but the pass differs between the two runs. Coverage is the change in recovered transitions. Precision is checked on the deterministic tier, which must not decrease.

RQ4. *Is the extracted graph sensitive enough to source changes to support change impact analysis?*

This is measured with mutation testing. Known changes are inserted into the source, and the graph is checked for the expected difference.

RQ5. *Are the losses a property of the applications or of the tool?*
A defect class names where extraction failed; it does not say whether the navigation was unreadable or merely unread. Each class of RQ2 is therefore taken to its root cause in the source of the application it appeared in, every cause that is the extractor's is repaired, and the corpus is measured again. A site that still yields no transition must then name the reason, and the script that produces those reasons fails if any site has none, so an unexplained remainder cannot pass silently. One kind of reason is a target the application never declares, which makes the graph a way of finding dead links without running anything; it is reported as a candidate list and not as a count, because a route the readers fail to read is indistinguishable from one the application does not have.

RQ1 and RQ2 are answered by measuring the extractor on a corpus of six open-source Angular applications. The applications are pinned to specific commits and range from 14 declared route entries to more than nine hundred. Five evaluation methods are used, chosen so that they do not share the same blind spot. RQ3 is addressed by formulating attribution as a dataflow analysis over a lattice of screen sets, implementing it, and evaluating the result on the same corpus with the same methods. RQ4 is answered on the graph produced after attribution has been applied. RQ5 asks whose the remaining losses are, and it is what decides which instrument the other four questions are answered on: every cause that proved to be the extractor's was repaired, and the figures reported throughout Chapter 5 are those of the repaired instrument. Section 5.5 reports what the repairs cost the soundness property, and what the earlier instrument measured is kept there for comparison rather than as a second set of results.

The thesis has four limits of scope. It does not claim completeness. When a navigation target is computed at run time, the full set of transitions cannot be determined statically in general. The thesis therefore states a conditional soundness property over a declared scope, tests it mechanically against the source at every deterministic edge it produces, and measures recall empirically. The property is not proved, and on this corpus there is nothing left for it to range over. Four corrections — to how a guard is read, to how an edge that several constructs cite is judged, and to whether a navigation runs under a condition — each shrank the deterministic tier, and the last empties it on all six applications (Section 5.5). Every transition the earlier instruments called deterministic turned out to run only once something had happened: a request had returned, a branch had been taken, a template condition held. Chapter 5 reports each correction rather than only its result. Reading those conditions correctly cost RQ1's stricter measure everything it counted, and the chapter reports that rather than a favourable half. This follows the position of Livshits et al., who argue that a practical static analysis should be described as sound modulo an explicit list of the language features it approximates [47]. It also does not measure the effect of the graph on coding agents or on any other consumer. Such a measurement would require a controlled experiment and is left for future work. A third limit is the one that bears hardest on the contribution: the screen sets attribution computes are validated in both directions on one application only. Across the corpus a scope that is too small can be refuted by the rendered interface, and

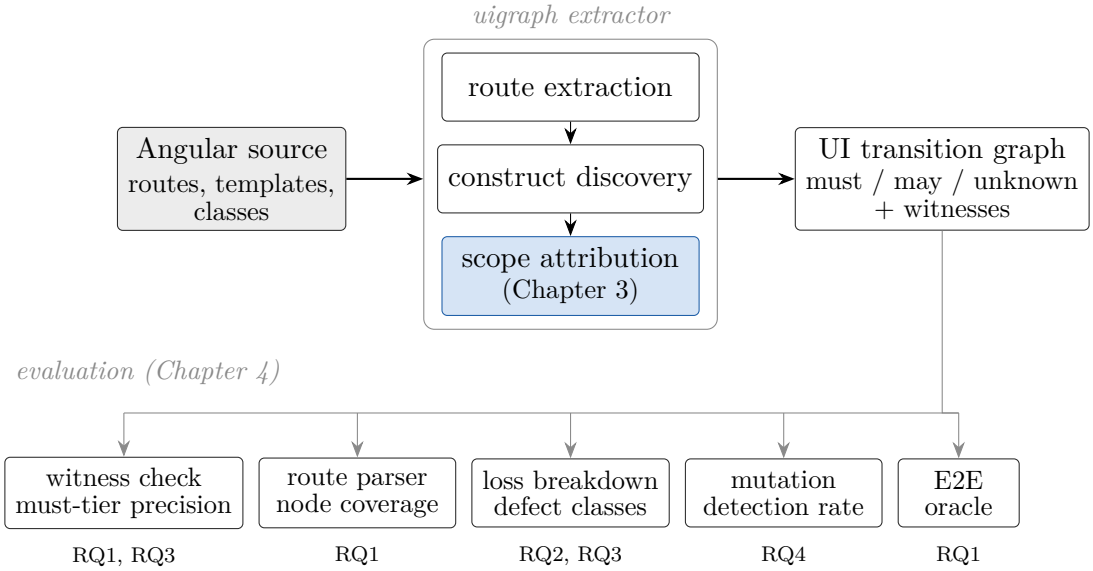


Figure 1.1: Overview of the study. The extractor turns Angular source into a UI transition graph; scope attribution is the analysis this thesis adds. Five measurements, each tied to the research questions it answers, evaluate the graph.

Section 5.3.1 refutes 4 of them, while a scope that is too large cannot be, because at the screens that method can observe the graph almost never claims a destination exactly. For one application the screens each site really fires from were read off the sources by hand, which gives both directions, and the result qualifies the contribution rather than confirming it: the analysis is right about 97.3 % of the attributions there, but the mechanism earlier work already has reaches 94.7 % of them without a single wrong attribution, and all 9 of the wrong ones this analysis makes come from one rule it adds (Section 5.3.4). The computed scopes are also wide: narrower than attributing every site to every screen by a factor between 1.7 and 18.5, which at the low end names most of an application (Section 5.3.2). What is established on the application that could be checked exhaustively is therefore a trade and not an improvement: the mechanism finds more of the real attributions than the simpler alternatives and is the only one that invents any, so which of them is preferable depends on whether recall or precision is wanted. Whether even that trade holds on the largest application is not established. Finally, the results apply to Angular only. The graph model does not depend on the framework, and the tool has adapters for other frameworks, but all measurements reported here concern Angular applications.

1.3 Thesis structure

Figure 1.1 shows how the parts of the study fit together.

Chapter 2 presents the background. It introduces the terminology used for transition graphs in different research communities, reviews static extraction for Android, navigation models for web applications and dynamic state models for single-page applications, and describes the Angular mechanisms the analysis has to

handle together with the program analysis ideas it builds on. Chapter 3 presents the contribution: the graph model and its soundness claim, the scope attribution analysis, and its implementation. Chapter 4 describes the evaluation setup: the corpus and why it can be considered valid, the metrics, and the five evaluation methods. Chapter 5 presents the results for each research question: node extraction and the ceiling it sets, then scope attribution and what it recovers, then the defect classes taken to their causes, change sensitivity, what the repairs cost the soundness property, and the dead links the graph finds without being run. Appendix A holds the validation of the measuring instruments — the disagreements between the two static readers, how the declared-screen set moved under the corrections, the case-by-case account of asking the running framework, and the record that every remaining site names a reason. It is kept apart from the results because it establishes that the instruments measure what they claim, not what the analysis recovers. Chapter 6 discusses the results, the limitations of the study, the constructs the analysis approximates, how the approach transfers to other frameworks, and future work. Chapter 7 concludes the thesis.

Chapter 2

Background

This chapter provides the background needed for the rest of the thesis. Section 2.1 fixes the terminology, since the same kind of graph is called by different names in different communities. Sections 2.2 to 2.4 review the three lines of prior work that are closest to this thesis: static extraction for Android, navigation models for web applications, and dynamic state models for single-page applications. Section 2.5 summarises the three formal ideas the analysis builds on. Section 2.6 reviews static analysis carried out over a source-level syntax tree, and what the type annotations of a TypeScript program do and do not contribute to it; this is the tooling style used by the analysis in Chapter 3. Section 2.7 introduces the Angular mechanisms that the analysis has to deal with and the program analysis problem each of them raises, with dependency injection treated at length because it is the mechanism that hides the most control flow. Section 2.8 reviews reactive programming and the boundary it puts on a static analysis. Section 2.9 reviews mutation testing, which is the method used in Chapter 4 to answer RQ4. Section 2.10 states the gap that the thesis addresses.

2.1 UI transition graphs

A UI transition graph is a directed graph in which the nodes represent user-visible states of an application and the edges represent transitions that a user action can cause between those states. Figure 2.1 shows a small example in the model used in this thesis.

Several research communities have studied this kind of graph, and each uses its own terminology. In Android static analysis it is called a *window transition graph* [79], or, at a finer level of detail, an *activity transition graph* [14] or a *screen transition graph* [39]. In the Ajax crawling literature the term is *state flow graph*, where a state is an abstraction of the DOM [50]. In web engineering the usual terms are *navigation model* and *navigation state machine* [62, 18]. Recent work on software agents uses the term *UI transition graph*. This thesis uses the last of these and treats the others as equivalent for its purposes, while noting that they differ in what is counted as a state and in how the graph is constructed.

More important than the naming is how the graph is obtained: *statically*, from source code or binaries without executing the application, or *dynamically*, by running

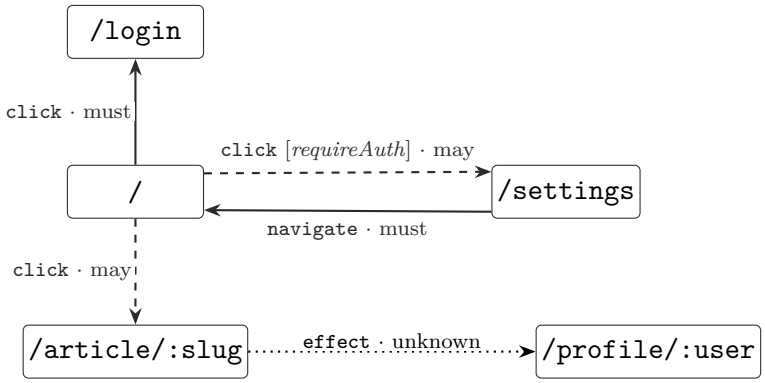


Figure 2.1: A small UI transition graph in the model of this thesis. Each edge carries an event, an optional guard in brackets, and a modality. A *must* edge always fires when its code runs, a *may* edge is conditional, here on a route guard or on a target that is only partly known, and an *unknown* edge is one whose firing condition cannot be determined statically, such as a navigation inside a signal effect.

and observing it. It also matters whether the graph represents *guards*, that is, whether each edge records the condition under which the transition is available or only that the transition exists. Table 2.1 classifies the work reviewed in the following sections according to both distinctions.

2.2 Static extraction for Android

The largest body of static work on transition graphs concerns Android. Yang et al. introduced the window transition graph, in which the nodes are windows (activities, dialogs and menus) and the edges are transitions caused by callbacks that run on the UI thread [79]. A later version of the same work adds an explicit window stack so that the behaviour of the back button can be modelled [77]. A related analysis by the same group constructs a callback control-flow graph whose nodes are pairs of a handler and the widget it belongs to [78]. StoryDroid builds an activity transition graph from `startActivity` calls and uses a simple lexical rule to attribute code inside an inner class to the enclosing activity [14]. GoalExplorer combines a statically derived screen transition graph with dynamic exploration and evaluates the result against manually produced ground truth for 36 applications [39]. UI-CTX identifies the problem of finding the correct code context for a widget's behaviour as its first challenge and solves it with a backward data-flow analysis from the handler to the place where the widget is created [44].

These approaches have in common the way a navigation is attributed to a screen. In Android, an event handler is registered on a widget object, and at run time that object belongs to exactly one window. Attribution can therefore be treated as an object resolution problem: the widget identifier is resolved, usually by constant propagation of the `getId()` call, and the window is then known [78]. The problem is well defined because the platform's object model guarantees a single owner.

The limits of this approach become visible in ProMal. Its authors report that a

purely static window transition graph loses precision on user-interface code that is shared between contexts, such as a dialog that several activities reuse. They address this by combining the static analysis with runtime traces and a learned model [45]. This is the case in which no single owning window exists, and here the Android work moves away from static analysis.

2.3 Navigation models for web applications

Navigation models for the web were first extracted from server-rendered sites, well before single-page applications became common. Ricca and Tonella modelled a web application as a set of pages, frames and forms connected by links and form submissions. Their model includes conditional edges that carry a boolean condition on input values, and it was derived semi-automatically using a crawler together with annotations by an analyst [62]. WebUml recovers a state diagram from HTML, script and server-side pages by combining static source analysis with mutation-driven execution, and derives guards by control-flow analysis of the server code [9]. A patent assigned to Fujitsu describes a fully static method for extracting a navigation model from Struts and JSP sources, including pages that are referenced but do not exist [69]. On the verification side, Haydar et al. model a web application as a system of communicating automata derived from recorded browsing sessions [28], and SiteHopper builds abstracted navigation state machines on the fly for model checking [18]. In addition, design-time notations such as OOHDM, WebML and UWE describe the navigation structure of a site before it is implemented rather than extracting it from code.

This work shows that navigation models, including guards, have been extracted statically from web applications. The models reviewed in this section all concern server-rendered frameworks, where a page corresponds to a file and a link to an anchor element, and none of them deals with a client-side router, a component tree, or dependency injection; Section 2.4 turns to the work that does.

2.4 Dynamic state models for single-page applications

When web applications moved to Ajax and later to client-side frameworks, work on model construction moved to run time. Crawljax executes user events against a running application, compares the DOM before and after each event, and builds a state flow graph whose nodes are equivalence classes of DOM states [50]. Later work in this line changed the exploration strategy but not the source of the model. FeedEx uses feedback from the graph built so far to direct further exploration [51], and FRAGGEN abstracts states as hierarchies of DOM fragments in order to generate better tests [74]. The survey by Kertusha et al. covers the model-based web testing tools of the past decade [36]. Of the tools it lists, every one whose model construction was examined for this thesis builds that model by executing the application.

The explanation for this seems to be historical. In an Ajax application there was no declarative route table, and one URL could represent many states, because navigation was implemented by handlers that modified the DOM. The DOM was therefore the only observable that distinguished one state from another. Static analysis of the JavaScript of that period, with its dynamic dispatch and handlers constructed at run time, was in practice not feasible. So the dynamic approach was used because there was no static artefact to analyse.

Client-side routing frameworks changed this situation. The route table is now a declared data structure in the source, a navigation is an attribute or a method call that names a route, and a guard is a named function attached to a route. Four static analyses of such a framework were found during the literature search for this thesis, three of them reading the framework's own sources and one a compiled bundle. Kurant's component dependency graph for React stops at the component rendering graph without addressing routing [38].

The other three do address routing. Oshima and Kishi extract page transitions from an Angular application in order to model-check them with SPIN [56]. Their extraction reads the transition information from the route declarations in `RouterModule`, reads the navigable paths from every component rather than only from the routed ones, and then resolves the parent–child relationships among the root component, the routed component and the custom child components in order to attribute each navigable path to the routed component that contains it. The problem addressed in this thesis is therefore not a new one. That attribution step is scope attribution: a navigable path is attributed to the routed component that contains it, and the root component's own paths to every page, computed statically from the router configuration. Section 5.3.3 measures exactly that combination, as the *rooted* level of the analysis presented here.

What distinguishes the present work is the input the method accepts and what it claims about its output. The authors state that the applications they handle must not use the `children` attribute or route parameters in the routing declarations, and that navigations arising from data binding are not treated as page transitions. Those three exclusions remove nested route trees, parameterised addresses, and every navigation whose destination is an expression rather than a literal. A screen is identified by the name of its routed component rather than by an address, so path composition does not arise, and guards, lazy loading and named outlets are not part of the model. The attribution follows component containment together with the root component's own paths, so a navigation site that reaches a screen through a method call or through a dispatch lies outside the mechanism. The model carries no modality, so a navigation that is always available and one that is available only if a guard admits it are represented identically. The evaluation applies the tool to four constructed applications and to two published ones of 1824 and 6893 lines, with six and twenty-three pages, and reports whether the intended model was produced and whether injected transition faults were detected. What the extraction loses on an application it cannot fully read is not measured, which is the question this thesis takes as its subject.

Two recent works read a client-side router configuration statically for other ends.

Rima et al. parse Angular sources and templates to build a graph of navigation structure, interaction sites and the conditions — guards among them — that decide whether an interaction is executable, enumerate workflows over that graph, and compile each workflow into a browser test; the graph is a coverage denominator for generated end-to-end tests [64]. That account is taken from the publisher's abstract and the project's replication package, the chapter itself not having been available to this review. Zhang et al. parse the compiled JavaScript bundle rather than the sources, take declared routes as vertices and navigation calls as edges, and check an access-control policy against the screens reachable from an authorised one; their graph is declared an over-approximation and is not narrowed, and no navigation site is attributed to the screens it can fire from [82]. This review found a measurement of extraction loss in neither. The problem addressed in this thesis is therefore neither new nor settled: the graph has been extracted statically for model checking, for test generation and for policy checking, and in none of those is the attribution of a site in shared code computed beyond containment or the loss quantified.

The work reported here is located between these analyses and the dynamic tools described above.

2.5 Formal foundations

The analysis builds on three ideas from the literature: a transition system in which edges carry a modality, a stated position on what soundness can mean for a practical analysis, and dataflow analysis as the computational framework.

2.5.1 Modal transition systems

The *modal transition system* of Larsen and Thomsen labels each transition as either required (*must*) or merely permitted (*may*) [42]. The graph model in Chapter 3 adopts this distinction and adds a third label, *unknown*, for edges whose modality could not be determined. The distinction has practical consequences: the thesis makes a soundness claim about the must tier only, and the evaluation treats the tiers differently, since the evidence behind a may edge establishes less than the evidence behind a must edge.

Carrying a modality on the edge also changes what an unresolved construct does to the graph. An analysis with a single edge kind has two options when it cannot decide whether a transition occurs: emit the edge and lose precision, or drop it and lose recall. With a modality the same situation produces an edge whose label records how much was established, and a consumer can select the tier it needs. The tiers are reported separately in Chapter 5 for this reason.

2.5.2 Soundiness

Livshits et al. argue that practical static analyses are sound only with respect to a subset of the language, that this is unavoidable in practice, and that the appropriate

response is to state explicitly which language features are approximated rather than to claim soundness in general [47]. This thesis follows that recommendation: it states its soundness property only over a declared scope, lists the approximated Angular constructs with their measured frequency in the corpus, and measures recall empirically. The literature reviewed in Sections 2.6 to 2.8 gives the specific reasons why a general claim is not available for this setting. Type annotations in TypeScript are deliberately not guarantees, framework configuration decides which implementation a call reaches, and the firing condition of a reactive computation is not written in the program text.

2.5.3 Dataflow analysis and abstract interpretation

Kildall showed that many program analyses can be stated as the computation of a fixpoint over a lattice of abstract values, where information is combined with a join operation and propagated along the edges of a graph until nothing changes [37]. If the lattice has finite height and the transfer functions are monotone, the computation terminates and its result does not depend on the order in which nodes are visited. Cousot and Cousot gave the general theory behind this approach as abstract interpretation [16], and Nielson et al. give a textbook account [54]. Scope attribution in Chapter 3 is an instance of this framework. The abstract values are sets of screens, the graph is the call graph extended with component nesting, and the join is the union of scopes.

The framework is independent of the language being analysed, and it has been applied to JavaScript as well; Section 2.6 describes that work. What a particular instance needs is a lattice whose height is bounded and a propagation graph. Both are available here: the set of screens is finite, so the lattice of screen sets has a height equal to the number of screens, and the call graph with component nesting supplies the propagation graph. Where the propagation graph itself is incomplete, because a call could not be resolved, the result is incomplete in a way the framework does not detect, which is why the scope has to be declared.

2.6 Static analysis of JavaScript and TypeScript source

The analysis in Chapter 3 reads Angular source with the TypeScript compiler API, so it works on a source-level abstract syntax tree rather than on a compiled artefact. This section reviews that tooling style, the abstract interpretation work that put lattice-based analysis of JavaScript on a formal footing, what the type annotations of a TypeScript program contribute, and the evidence that frameworks rather than the language are what limits such analyses in practice.

2.6.1 Analyses over a source-level syntax tree

Analysing the syntax tree of the source, rather than a bytecode or an intermediate representation, is a long-established style. Baxter et al. detect exact and near-miss code clones by comparing abstract syntax trees, using a variant of the common-subexpression detection used in compilers, and apply the technique to a C system of about 400 000 lines [8]. The approach keeps the analysis close to what the developer wrote, which matters when the result has to be reported back at a source location.

SPOON makes this style into a reusable library. It exposes a metamodel of Java source and lets an analysis or a transformation be written in plain Java, without modifying a compiler and without learning a separate formalism [58]. The TypeScript compiler API occupies the same position for TypeScript: it gives a typed syntax tree, a symbol table and a type checker over an ordinary program, which is what allows the Angular adapter to resolve a constant reference in a route table or the declared type of an injected field. The cost of the style is that the analysis sees the program as written, including the parts that a compiler would later rewrite or erase.

2.6.2 Abstract interpretation of JavaScript

Lattice-based analysis of JavaScript itself has a formal treatment. Jensen et al. present a static analysis based on abstract interpretation that infers detailed and sound type information for JavaScript, covering the full language including its object model and the built-in functions, and propose it as a foundation for developer tools [29]. The work shows that the framework of Section 2.5 applies to JavaScript at the level of individual values, which is a considerably harder problem than the one addressed in this thesis. Scope attribution uses the same machinery over a much coarser domain. Its elements are sets of screens, not abstractions of heap objects, so the height of the lattice is the number of screens and does not depend on the structure of the heap.

2.6.3 What TypeScript's types contribute

Angular applications are written in TypeScript, so an analysis can read declared types instead of inferring them. The type system is deliberately unsound. Bierman et al. give a precise definition of it [10], and Richards et al. describe the annotations as unsound by design [63]. That deliberate unsoundness means a declared type is evidence about the program rather than a guarantee about its execution.

The empirical picture is consistent with that. Gao et al. took bugs that had been fixed in the histories of JavaScript projects, added type annotations to the buggy versions, and checked whether a type checker would have reported them; both Flow and TypeScript detected about 15% of these bugs [25]. Bogner and Merkel mined 604 GitHub projects, 299 in JavaScript and 305 in TypeScript, together more than 16 million lines of code, and found better code quality and understandability for the TypeScript projects, but no lower bug proneness and no shorter bug resolution time; heavier use of the `any` type correlated weakly with worse measurements [11].

The declarations that describe untyped libraries can themselves be wrong: TSCheck compares a declaration file against the library it describes by capturing the runtime object state after initialisation and adding a light static analysis of function code, and found 142 errors in the declarations of 10 libraries [22].

What follows for an analysis of Angular code is a division of labour. A declared type narrows the set of candidate implementations of a call, which is useful and is what the call graph construction in Section 2.7 relies on. It does not establish that the call reaches exactly one of them, so an unresolved or ambiguous type has to widen the result rather than be trusted. In the graph model this appears as the difference between the must tier and the may tier.

2.6.4 Frameworks, not the language, are the obstacle

The practical obstacle to analysing a client-side application is the framework around the code, not the language. Madsen et al. observe that JavaScript applications depend on large frameworks and libraries whose behaviour a static analysis has to know, that hand-written models of them are tedious to produce, incomplete and sometimes wrong, and that the alternative is to infer library behaviour from the way the application uses it; they combine pointer analysis with such a *use analysis* and evaluate it on 25 Windows 8 JavaScript applications [48]. A later analysis by Madsen et al. addresses implicit control flow directly. Their *event-based call graph* for Node.js represents listeners that run when an event fires, and the analyses that build it find event-handling defects such as events that no listener handles and listeners registered too late [49]. An Angular application has the same shape of problem, with the router, template event bindings and observable subscriptions in place of the Node.js event emitter.

Two peer-reviewed static analyses of a framework in the Angular family bear on this work. The one that addresses navigation is Oshima and Kishi's, discussed in Section 2.4. The other, which does not, is Aurebesh, by Ocariza et al. [55]. It defines a consistency model for web applications built on an MVC framework and detects identifier and type inconsistencies between models, views and controllers, reporting a recall of 96.1% and a precision of 100%, and finding 15 real bugs. The work concerns AngularJS 1.x, which is a different framework from the Angular versions this thesis analyses, with a different template language, a different component model and a different injector. What the two have in common is the problem of relating an identifier in a template to the code that defines it, which Aurebesh solves for a consistency check. Aurebesh targets consistency between templates and controllers rather than navigation, and reports no transition graph.

2.7 Angular routing, dependency injection and reactive state

The analysis presented in Chapter 3 operates on Angular applications, and most of its difficulties arise from particular Angular mechanisms. This section introduces those

mechanisms and relates each of them to the program analysis problem it creates. The Angular documentation is the reference for the framework details [26]. Listings 2.1 to 2.3 show the constructs discussed below in a small example, which later chapters return to.

Listing 2.1: A route table with the constructs the analysis must handle: a guarded route, a parent route whose children render in its outlet, a lazily loaded route table and a path held in a constant.

```
export const routes: Routes = [
  { path: '', component: HomeComponent },
  { path: 'settings', component: SettingsComponent,
    canActivate: [requireAuth],
    children: [{ path: 'profile', component: ProfileComponent }] },
  { path: 'admin', loadChildren: () => import('./admin/admin.routes') },
  { path: paths.about, component: AboutComponent },   // constant, not a
    literal
];
```

Listing 2.2: The root component's template. The header sits next to the outlet, so its links are present on every screen but belong to none of them.

```
<app-header />                <!-- shell: rendered on every screen -->
<router-outlet />             <!-- the active route renders here -->

<!-- header.component.html -->
<a routerLink="/settings">Settings</a>
@if (user()) { <a [routerLink]="['/profile', user().name]">Me</a> }
```

Listing 2.3: Navigation from an injected service. The call site belongs to no component, so its screens can only be found through the components that call `logout`.

```
@Injectable({ providedIn: 'root' })
export class AuthService {
  private router = inject(Router);
  logout(): void {
    this.session.clear();
    this.router.navigate(['/login']);
  }
}
```

2.7.1 Routes

An Angular application declares its screens as a tree of route objects. Each route has a `path` pattern and, in addition, either a `component` to render, a `redirectTo` target, or a list of `children`. A route that has children but no component acts as a path prefix and does not itself correspond to a screen. Routes can be loaded lazily using `loadChildren` or `loadComponent`; in that case the child routes are defined in another module or file that is resolved when the application is built. Routes may also have guards, namely `canActivate`, `canMatch` and `canDeactivate`, which are functions or injectable classes that return either a boolean or a `UrlTree` representing a redirect. Route paths are strings, but they are not necessarily string literals. Applications

that keep their route table in one place often write `path: routes.about.path`, and resolving such a path requires following the constant to its definition.

2.7.2 Components and templates

Each screen is rendered by a component, which is a class together with a template. A template can instantiate other components by their selectors, so the components of an application form a nesting graph. A template can also contain a `<router-outlet>` element, which marks the position where the router inserts the component of the currently active child route. Components that are above the outlet in the nesting graph make up the application shell and are present on every screen, whereas components below a routed component are present only on that screen. Structural directives such as `@if` and `*ngIf` make the nesting conditional. Templates can additionally be passed around as values of type `TemplateRef` and rendered in a different component, and components can be created programmatically at run time.

2.7.3 Navigation sites

In a template, navigation is expressed with the `routerLink` directive, whose value is either a literal path or an array of path segments. In class code, navigation is performed by calling `Router.navigate` or `Router.navigateByUrl`; the target may be given relative to the current route through the `relativeTo` option. Both kinds of navigation site can appear in any component, in any injectable service, and in guards, interceptors and resolvers. The source code does not state anywhere which screens a given site can be triggered from; this information has to be derived.

2.7.4 Dependency injection

Angular creates services and passes them to the components and services that declare them as dependencies. This is dependency injection, a form of inversion of control: a class does not construct or look up its collaborators, but receives them from a container [32, 24]. A dependency is requested by type or by an injection token, and the same token can be bound to different implementations in different injector scopes, using `useClass`, `useExisting` or a factory function.

The pattern is not specific to Angular and is widely used. Yang, Tempero and Melton developed operational definitions of dependency injection and techniques for detecting its use from source code, and applied them to 34 open-source Java applications [75]. Their motivation is the usual argument for the pattern, that it improves extensibility, modifiability, testability and reusability. The configuration that dependency injection introduces is itself an object of static analysis: Laigner et al. catalogue 12 dependency injection anti-patterns together with refactorings, and detect them with a static analyser at a relative recall of 92.19%, reporting that at least 9 of the anti-patterns occur frequently in open-source and industrial projects [40]. Dependency injection configuration is therefore readable statically; it does not state which binding a given call site will see.

For a static analysis this turns a simple method call into a dispatch problem. A call such as `this.nav.goHome()` can only be linked to the method it invokes after the type of `nav` and the binding of that type in the relevant injector have been resolved. This is the call graph construction problem known from object-oriented languages, where a virtual call must be resolved to its possible targets. Class hierarchy analysis resolves such a call using the declared type and its subclasses [17]. Rapid type analysis narrows the result to classes that are actually instantiated [5], and points-to analysis narrows it further by tracking which objects each variable may hold [2]. Grove and Chambers place these algorithms in a common framework that trades precision against cost [27]. For JavaScript, Feldthaus et al. show that an approximate call graph, which tracks functions only by the property names they are stored under, is precise enough for practical tools [23].

Dependency injection adds a further difficulty, because the binding of a type to an implementation is not written in ordinary code but in framework configuration. The Java literature has measured what this costs a general analysis and what recovers it, and Table 2.2 lists the analyses that model framework behaviour explicitly. Sridharan et al. report that the heavy use of reflection in frameworks makes static taint analysis ineffective, and that adding support for one framework at a time does not scale; their tool instead generates a specification of framework behaviour from the application code and its configuration files, which an unmodified taint engine then consumes, and this found 525 new issues across nine benchmarks [67]. Antoniadis et al. report that major Java analysis frameworks offer almost no support for enterprise applications, capture the concepts those frameworks share, such as components and entry points, in a declarative and largely framework-independent form, and measure about four times higher completeness and about a sixfold speedup against the most precise conventional analysis [3]. Landman et al. put a bound on what can be hoped for: in a literature review and corpus study of Java reflection they find that reflection cannot be ignored in 78% of projects and that resolving it requires unsound assumptions [41].

The closest analogue to resolving Angular's injectors is Jasmine, by Chen et al. [13]. Spring's core mechanisms, dependency injection and aspect-oriented programming, rely on dynamic language features, and the consequence is that a conventional call graph of a Spring application is missing edges. Jasmine extends Soot so that the call graph of a Spring program becomes more complete, and was evaluated on micro-benchmarks and on 18 real Spring programs; it improves on tools built with Soot and with Doop, and in combination with FlowDroid it exposed 12 sensitive-data leak paths. The structural problem is the one that occurs in Angular: an injected field has a declared type, the binding of that type lives in framework configuration, and an analysis that does not read the configuration cannot connect the call to a body. The difference is in where the configuration lives and how far its effect reaches. Angular binds tokens in provider arrays that belong to a module, a route or a component, so the same token can resolve to different implementations depending on where the injection happens. Resolution is relative to an injector rather than global, which makes the provider hierarchy part of the input to the analysis.

The analysis in Chapter 3 follows the advice this literature converges on, which is

to model the framework explicitly rather than to treat its configuration as ordinary code. It reads Angular's provider declarations and resolves an injected type in the style of class hierarchy analysis. Where a token can be bound to more than one implementation, all of them are considered.

2.7.5 Reactive state

Recent versions of Angular include signals and effects. A signal is a value that changes over time, and an effect is a computation that runs again whenever a signal it read changes. This is an instance of reactive programming, which goes back to functional reactive programming [21] and has been surveyed by Bainomugisha et al. [6]. In reactive systems the dependencies between values are recorded at run time, and the runtime propagates updates without explicit calls in the program text. So when a navigation call is placed inside an effect, the condition under which it fires is a data dependence in a reactive graph and not a control-flow condition. A static analysis can find which signals the effect reads, but not when the effect runs. Angular applications also use RxJS observables for the same purpose, in router event subscriptions, HTTP responses and state containers. Section 2.8 reviews what the reactive programming literature establishes about this boundary.

2.8 Reactive programming and the limits of static dataflow

The reactive style gives the runtime, rather than the program text, control over when a computation runs. This section reviews the propagation discipline that reactive runtimes implement, and the evidence about how well reactive code can be reasoned about with tools.

2.8.1 Propagation order and glitch freedom

A reactive program is a graph of values in which an update to one value has to be propagated to the values that depend on it. Cooper and Krishnamurthi embed dynamic dataflow in a call-by-value language, so that an expression evaluates to a node in a dataflow graph [15]. Their account names the central hazard: a *glitch* occurs when a signal is recomputed before all of the signals it depends on have been brought up to date, which makes an intermediate value observable that no consistent state of the program ever had. Their runtime prevents glitches by assigning each signal a height and updating signals in order of increasing height, which is a topological order and therefore requires the dependency graph to be acyclic. Drechsler et al. carry the property into a distributed setting with a change-propagation algorithm that needs no central knowledge of the dependency topology, avoids propagating updates that cannot change a result, and preserves glitch freedom [20]. An Angular signal graph, as described in Section 2.7.5, records its dependencies as they are read, so it is the kind of structure that these propagation algorithms are defined over.

The consequence for a static analysis is that the order in which reactive computations run is a property of the graph that the runtime builds, and the graph is built from the reads that actually happen. The set of signals a given effect may read can be over-approximated from the source. The number of times the effect runs, and the state of the application when it runs, cannot be, because that depends on which writes occur and in what order.

2.8.2 Reactive code and the tools developers have

The empirical literature on reactive programming reports a split between reading code and reasoning about its behaviour. Salvaneschi et al. ran an experiment with 127 subjects comparing reactive programming against object-oriented code using the Observer pattern, and found comprehension significantly better in the reactive version [66]. The same group reports that the tool support is the weak side. Reactive programs, they argue, need debugging concepts of their own, because a conventional debugger shows a call stack while the question is about a dataflow graph; their Reactive Inspector implements such concepts and outperformed conventional debugging in a controlled experiment [65].

The same picture holds for the Rx family of libraries, which Angular applications use for asynchronous data. Banken et al. report that conventional debuggers have no support for Rx and that developers fall back on inserting console logging; their RxFiddle visualises the structure and the values of an Rx dataflow, and in an experiment with 111 developers it let them finish debugging tasks faster [7]. Alabor and Stolze interviewed 10 professional engineers and observed 4 of them debugging RxJS code, and found that they rely on manually added trace logging rather than on specialised tools; the study is a workshop paper with a small sample, so it indicates rather than establishes the practice [1]. The surface that a tool would have to cover is large: Zimmerle et al. mined RxJava, RxJS and RxSwift usage on GitHub and Stack Overflow and found that 95.2% of the Rx operators are used in practice, with the stream abstraction itself the largest of the 23 Stack Overflow topics they identified, at 36.4% of the posts [83].

An analysis that aims to recover navigation from an Angular application inherits this boundary. A navigation placed in an effect or in a subscription has a firing condition that is a data dependence in a reactive graph. The read set is visible in the source and the firing is not. Chapter 3 therefore specifies the modality *unknown* for such edges and keeps the read set as the symbolic guard, which is the treatment the soundiness position of Section 2.5 prescribes for a construct that cannot be decided. No pass in this version emits that modality.

2.9 Mutation testing

RQ4 asks whether the extracted graph is sensitive enough to changes in the source to be useful for change impact analysis. The method used to answer it is mutation testing, applied in an unusual direction: the mutants are inserted into the application

source, and the artefact whose reaction is measured is the extracted graph rather than a test suite. This section reviews the technique, the evidence for the assumption it rests on, its use on JavaScript and web applications, and the reporting practice that Chapter 4 follows.

2.9.1 The coupling effect

Mutation testing inserts small syntactic changes into a program and measures how many of them a test suite detects. The original argument for it is the *coupling effect* stated by DeMillo et al., namely that tests which uncover simple errors are often also effective at uncovering much more complex errors [19]. Without that assumption a mutant would say nothing about the faults a developer actually writes.

Jia and Harman give the standard survey of the field, covering approaches, tools and empirical results; their trend analysis suggests that the techniques and the tools are reaching maturity and applicability [30]. Papadakis et al. survey the following decade of work on the fundamental problems of the technique and list the problems that remain open [57]. The evidence that mutants are a usable proxy comes from Just et al., who used 357 real faults in 5 open-source applications totalling 321 000 lines of code and found that mutant detection correlates significantly with real-fault detection, independently of code coverage, while also discussing the limitations of the analysis [33].

2.9.2 Mutation for JavaScript and web applications

Mutation analysis has been adapted to JavaScript and to web applications, where the cost of generating and running mutants is a central concern. Mirshokraie et al. guide mutant generation with a combination of static and dynamic analysis, directing it at code that is error-prone or likely to affect the output, in order to reduce the cost and the number of equivalent mutants, and they propose mutation operators specific to JavaScript and the web [52]. The journal version adds a ranking of functions and reports that more than 93% of the generated mutants are non-equivalent and that more than 75% of the surviving non-equivalent mutants fall in the top 30% of the ranked functions [53]. Praphamontripong and Offutt define operators for faults in the way web components interact with each other, covering client-to-server and server-to-server interaction, implement them in a tool called webMuJava, and report a small case study suggesting that the resulting tests find web application faults; the work appeared at a workshop [59].

On the tooling side, Stryker is a mutation testing framework for JavaScript and TypeScript. No peer-reviewed publication describing it was found, and the project does not cite one; its documentation describes implementations for JavaScript and TypeScript, for C# and for Scala, more than 30 supported mutations, a runner-agnostic design and an Apache-2.0 licence [68]. The absence of a paper is the reason the mutation procedure in Chapter 4 is specified in the thesis rather than delegated to a tool's defaults.

2.9.3 Reporting a mutation experiment

Papadakis et al. also give best-practice advice on the use of mutation in empirical studies of testing [57]. Chapter 4 follows it by stating the operator set it uses, how the mutants were produced and sampled, which mutants were excluded and why, and the detection rate for each operator separately instead of one aggregate figure. The operators it uses change the navigation structure of the application: renaming a route path, removing a guard, deleting a `routerLink` and retargeting a `Router.navigate` call. The oracle is the difference between the graph extracted before the mutation and the graph extracted after it, compared against the change that was authored, so the expected outcome is known without reference to the tool's own output.

This use of mutation puts the thesis in the change impact analysis tradition rather than in test adequacy measurement. Arnold and Bohner define a framework for comparing impact analysis approaches along three dimensions, namely how an approach is used, how it works internally, and how effective it is [4], and the collection edited by Bohner and Arnold is the standard reference for the area, covering source-code dependency analysis and traceability analysis [12]. Chianti is the classic tool of this kind: it decomposes the difference between two versions of a program into atomic changes and reports, for each affected test, the changes that affect it; on a year of version history from one project it found that an average of 52% of the unit tests were affected, each by only 3.95% of the atomic changes [61]. Lehnert's taxonomy classifies impact analysis approaches along more detailed criteria than the earlier frameworks and is useful for placing a new one, although it appeared at a workshop [43]. A transition graph whose edges carry source witnesses supports the same kind of query at the level of screens, and the mutation experiment measures whether the graph changes when the source it was derived from changes.

2.10 The gap

Static extraction of navigation models from web applications has been directed largely at server-rendered frameworks, in which a page is a file and a link an anchor; client-side routing frameworks have mostly been modelled dynamically instead. The literature search for this thesis found three static extractions of a client-side navigation graph, two from a framework's own sources and one from a compiled bundle, each building its graph for a different consumer. Oshima and Kishi's is the one that fixes the terms of the problem addressed here (Section 2.4). It does so, however, only for applications that declare no nested routes, no route parameters and no data-bound navigation, with attribution computed over component containment and the root component's own paths, with no modality on the transitions, and with no measurement of what the extraction fails to read. The other two put the graph to work without narrowing it: one as the coverage denominator of a generated end-to-end suite [64], one as the reachability relation of an access-control check, declared an over-approximation [82]. What has not been covered by earlier work is that extraction without those restrictions: over nested and lazily loaded route trees, with guards carried onto each transition as a modality rather than onto a workflow

as a feasibility verdict, with attribution that follows calls and dispatch as well as containment, and with the resulting loss declared and measured on applications large enough for the difficult constructs to occur. The Android literature is the nearest static relative. It attributes navigation by resolving the owning object, and when that fails for shared code it falls back on runtime traces. A navigation site in a web application frequently has no owning object that could be resolved. In Android the owning object of a handler usually identifies the window, so the attribution problem studied here does not arise there in the same form, and an Android technique cannot simply be reused.

The literature reviewed in Sections 2.6 to 2.9 fills in why the problem is open and what is available for addressing it. The analysis machinery is not missing: abstract interpretation of JavaScript is established [29], source-level analysis over a typed syntax tree is a standard tooling style [8, 58], and the Java literature has shown repeatedly that framework behaviour can be modelled explicitly to recover call edges that a general analysis loses [67, 3, 13]. Applying this to a client-side framework in order to recover navigation has been done, within the restrictions set out above [56] and, more recently, for test generation and for access-control checking [64, 82]; what this review found no instance of is an attribution that carries a navigation site in shared code beyond component containment, or a reported measurement of what the recovery fails to read. The other peer-reviewed static analysis in the Angular family targets AngularJS 1.x and checks template and controller consistency rather than navigation [55], and the type information that TypeScript adds narrows a dispatch without settling it, because the type system is unsound by design [10, 63]. The reactive literature marks where the boundary of the approach lies, since the firing of a reactive computation is decided by a graph the runtime builds and not by the program text [15, 7]. Mutation testing supplies a method for asking whether an extracted model reacts to source changes [30, 57], and the question of how a statically extracted navigation graph behaves under that method has not been answered for any client-side framework.

Table 2.1: Prior work closest to this thesis, classified by target, extraction mode, guard representation, and the ground truth used for evaluation.

Work	Target	Static	Guards	Ground truth
Yang et al. [79, 77]	Android windows	yes	callbacks	manual, 6 apps
Yang et al. [78]	Android callbacks	yes	context	manual vs. dynamic
StoryDroid [14]	Android activities	yes	no	hand-built, 10 apps
GoalExplorer [39]	Android screens	hybrid	intents	manual, 36 apps
ProMal [45]	Android windows	hybrid	no	40 apps, F1
UI-CTX [44]	Android widgets	yes	branches	2000 labelled widgets
Ricca and Tonella [62]	server-rendered pages	semi	yes	manual
WebUml [9]	server-rendered pages	hybrid	yes	case study
Tkachuk and Rajan [69]	Struts/JSP	yes	outcome	not stated
Crawljax [50]	Ajax DOM states	no	no	manual
FeedEx, FRAGGEN [51, 74]	DOM states	no	no	coverage
Kurant [38]	React components	yes	n/a	F1, no routing
Oshima and Kishi [56]	Angular pages	yes	no	6 apps, faults
Rima et al. [64]	Angular workflows	yes	conditions	7 apps, tests run
Zhang et al. [82]	SPA routes, from bundles	yes	no	2 apps, policy paths

Table 2.2: Static analyses that model framework behaviour explicitly, and the mechanism each of them resolves.

Work	Framework	Mechanism modelled
F4F [67]	Java web frameworks	reflective calls, from a specification generated from code and configuration
JackEE [3]	Java enterprise frameworks	components and entry points, declaratively
Jasmine [13]	Spring	dependency injection and aspect-oriented programming
Aurebesh [55]	AngularJS 1.x	identifiers shared between template and controller

Chapter 3

Static navigation analysis and scope attribution

This chapter presents the analysis that is the main contribution of the thesis. Section 3.1 defines the graph model and states the soundness property claimed for it. Section 3.2 presents scope attribution, the analysis proposed in answer to RQ3. Section 3.3 describes how both are implemented in the extractor. The evaluation of the analysis is described separately, in Chapter 4.

3.1 Graph model and soundness

Definition 3.1 (UI transition graph)**.** *A UI transition graph is a labelled transition system* (S, Σ, G, M, E) *with*

$$E \subseteq S \times \Sigma \times G \times M \times S.$$

S *is the finite set of* screens*, the states of the system and the nodes of the graph.* Σ *is the finite set of* event kinds *that can be raised at a screen, such as the activation of a* `routerLink` *or a call to* `Router.navigate`*.* G *is the set of* guards*, each held as the symbolic source text of the condition under which an edge may be taken.* M *is the set of* modalities*, which has exactly three elements,*

$$M = \{must, may, unknown\},$$

and whose elements are confidence labels: a modality states how firmly the extractor asserts an edge, and never denotes a screen, a route or a navigation target. An edge $(s, \sigma, g, m, s') \in E$ *reads: at screen* s*, event* σ *under guard* g *leads to screen* s'*, asserted with confidence* m*. Both the source* s *and the target* s' *are elements of* S*, namely the first and the last component of the tuple. Constructs in the source that agree on source, event kind, guard and target yield the same edge, and the paragraph on witnesses below says how they are traced.*

What the materialised graph carries beyond the model. The extractor emits two node kinds that are not screens, and the edge relation above does not range over them. An *unplaced origin* stands for a navigation site the analysis could not place under any screen; a *dynamic target* stands for a destination only the run

Table 3.1: What the published graphs are made of: nodes by kind, where an anchor stands for a whole subtree of screens and *other* counts unplaced origins and dynamic targets together, and edges by modality.

	nodes			edges		
Application	screens	anchors	other	must	may	unknown
realworld	10	2	0	0	55	0
alfresco	27	1	26	0	37	19
ghostfolio	84	14	105	0	262	140
k8s dashboard	67	1	76	0	78	103
bitwarden	98	7	154	0	183	88
mifos	606	14	120	0	10514	122
All	892	39	481	0	11129	472

time knows. Both are kept in the output rather than dropped, because a site the analysis cannot place is a loss Chapter 5 has to count, and a destination it cannot name is one the run time could still take. Table 3.1 reports how much of each graph they are. Over the corpus 481 of the 1412 nodes are of these two kinds, 34.1 % of them, and 472 of the 11601 edges reach a dynamic target. A further 117 edges leave an unplaced origin and are held at *may*, so they sit inside a tier Chapter 5 reports while their source is not a screen. An edge that reaches a dynamic target asserts that the screen it leaves has an outgoing navigation whose destination the analysis could not name, and asserts nothing about which screen is reached. Claim 3.1 and the conversion ratio RQ1 is defined on range over the edges whose source and target are both screens.

A *must* edge is claimed to fire for every input on which the enclosing code executes; a *may* edge is possible but conditional; *unknown* marks an edge whose modality could not be determined. The third modality carries the destinations the analysis cannot name: an edge into the `u_` sink of Section 5.5, which records that a screen is left by an event whose target only the run time knows. The pinned extractor does produce such edges: 472 of the 11601 edges in the corpus, in 5 of the 6 applications. Carrying this modality and reaching a node that is not a screen coincide exactly, on every edge of every corpus graph, and the census refuses to report a graph in which they come apart. The conversion ratio of RQ1 and the soundness property of Claim 3.1 are defined over the other two tiers, so the unknown tier is counted in the edge totals and in no rate. Guards are stored as source text and are never evaluated by the tool. A consumer of the graph can read a guard, but is not expected to decide whether it holds. This keeps the set G opaque and means that the model does not need to represent application state.

Alongside the modality the artefact records a numeric *confidence* on each edge, which is not part of the model and carries no claim this thesis makes. It is a finer version of the same ordering: 1 where the target is resolved and no guard applies, 0.6 where a guard does, 0.5 where the target could be one of several routes, and 0 for an edge into a dynamic target. Where several constructs yield one edge the weakest value is kept, so the number never rises when evidence is merged. Every figure in

this thesis is reported over the modalities, never over the confidence.

Screens and routes. The set S is derived from the route configuration, and not every route contributes a screen. Write *Routes* for the set of routes the application declares and *component*(r) for the component that route r renders. Then

$$S \;=\; \{\, \mathit{screen}(r) \;\mid\; r \in \mathit{Routes} \text{ and } \mathit{component}(r) \text{ is defined} \,\},$$

where *screen*(r) is the node for route r, identified by the full path that concatenates the paths of r and of its ancestors. A route that declares `children` but no `component` is only a path prefix, as Section 2.7 describes: it contributes no element of S, and its path is carried into the full paths of its children. A route whose only effect is a `redirectTo` renders nothing and likewise contributes no element of S. In Angular that case is exactly as narrow as it sounds: the router refuses a configuration that declares `redirectTo` and `children` together, and likewise `redirectTo` with a `component`, so a redirecting route can never also be the layout under which a child renders. Both refusals were read off the router's own configuration validator in the version vendored with this work, Angular 18.2.14; no corpus repository is checked out where the invariant could be re-read, so the sentence is scoped to that version. The same is not true of every client-side router – Vue Router applies a record's redirect only when that record is the last one matched, so a redirecting parent does render its component for a matching child – and Section 6.4 returns to it, because the model's step from "redirects" to "renders nothing" is a fact about Angular rather than about routers. Because *screen*(r) is identified by the full path, the map *screen*$(\cdot)$ is injective on the routes whose full paths are pairwise distinct. Angular also permits two component-bearing routes with the same full path, told apart at run time by `pathMatch` or by a `canMatch` guard. The model assumes that this does not occur: the extractor keeps the route declared first under a full path and drops the later ones. For Vue and for React the extractor also declares the drop, as a note carrying the file and line of the record it discarded, so a graph built from a table with a repeated address says so rather than being quietly one screen short; the note is true of the record and over-stated about the graph, because where both records name the same component the address still renders it. Angular's extractor drops silently, which is one of the asymmetries Section 6.4 returns to. Two routes with different paths that render the same component give two screens, which is the case that makes the attribution of Section 3.2 necessary.

Witnesses. Every edge of static or runtime origin carries a witness: the file and line of a construct that produced it, or an observation identifier. Where several constructs produce the same edge, one of them is kept as the witness and the others are recorded as merged witnesses, so that every construct behind an edge can be traced (Section 4.2). No edge is added to the base graph without a witness, and edges added manually are kept in a separate overlay. The tool's specification states this as an invariant, and the first evaluation method checks it mechanically.

Claim 3.1 (Soundness of the must tier)**.** *Every must edge corresponds to a navigation that occurs, for every input on which the enclosing code executes, over the declared route set.*

The evaluation tests a necessary condition of this claim rather than the claim itself, and the distinction decides how the figures of Chapter 5 may be read. The witness check of Section 4.3 re-reads the source at every location an edge cites and asks whether the construct found there names the destination the edge names. An edge whose cited construct names a different destination cannot satisfy the claim, so a failure of the check refutes it; agreement does not establish it. Whether the navigation occurs *for every input on which the enclosing code executes* is decided by the rules that place an edge in the must tier instead of the may tier. A site is demoted when a guard on its target can refuse it, and when it runs only on some executions of its own code: under a template control-flow block or a structural directive, under a branch, inside a callback the result of an asynchronous call invokes, or after an `await` or an early `return`. The extractor's own unit tests cover those rules and share its reading of each construct; the conditional part is also re-derived by a second reader, written apart from the extractor, from the syntax tree of every construct a must edge cites. The guard part has no such second reader. Section 5.5 reports three cases in which the extractor's reading was wrong and the tier was too large as a result, the last of them the absence of the conditional rule altogether. What the check establishes is therefore narrower than the claim: that every cited site exists in the source and agrees on its target. The stronger half of the claim rests on the demotion rules and is not independently verified.

This is the only soundness property claimed in the thesis, and it holds only relative to the declared route set. No such property is claimed for the may and unknown tiers. The witness of a may edge shows that the corresponding call site exists in the source, but it does not show that the transition is ever taken. This difference between the tiers matters for the evaluation. Whether the target found at a witness location agrees with the target of the edge is a meaningful question for must edges, and for may edges whose target is a literal. It is not a meaningful question for edges that the extractor produced by over-approximation, and treating it as one leads to spurious failures, as described in Section 4.3.2.

3.2 Scope attribution

This section specifies more than the prototype contains, and the division is the same throughout. Component nesting, router outlets, the shell rule and anchored edges are implemented in the extractor and are the parts evaluated in Chapter 4. The call graph with dependency injection, the dispatch relations that carry NgRx effects and router event subscriptions, guards that return a `UrlTree`, navigation sites in interceptors and resolvers, and navigation inside signal effects and observable subscriptions, which the model labels *unknown* (Section 3.2.5), are part of the model only: they are specified here to define the analysis, but no edge in the measured graphs comes from them. The navigation sites they would attribute, in a service, guard, interceptor, resolver or effect, contribute no edge, and the evaluation counts them in the defect class "Attribution, service" of Table 4.2. Section 3.3 gives the same division from the implementation side.

3.2.1 The defect being addressed

In the version of the extractor used for the baseline measurements, a navigation site is attributed to a screen only if it occurs directly in the component that the route for that screen renders. Navigation sites anywhere else are not attributed to any screen. This one cause explains three symptoms in the baseline: shared components contribute no edges, because the application shell places the header next to the router outlet and not inside the subtree of any screen; a component mounted at several routes contributes one edge instead of one per route; and applications that navigate from injected services produce no edges at all.

3.2.2 Scope

Every navigation site is anchored at a *scope*: the set of screens from which it can fire. A scope is thus an element of the powerset $\mathcal{P}(S)$, and the abstract domain of the analysis is $\mathcal{P}(S)$ ordered by inclusion, with set union as join,

$$X \sqsubseteq Y \iff X \subseteq Y, \qquad X \sqcup Y \;=\; X \cup Y,$$

which is the powerset lattice over the screens. Its least element is the empty scope,

$$\bot \;=\; \varnothing,$$

a site that fires from no screen at all. The greatest element is $\top = S$, every screen.

Two different things are called a scope, and the rest of this thesis keeps them apart. Write $\mathit{scope}^*(x)$ for the *true scope* of a site x, the set of screens from which x really can fire, which is a property of the application and not of any analysis; and $\mathit{scope}(x)$ for the *computed scope*, the set the fixpoint of Section 3.2.3 returns. The two are measured against each other only where a true scope has been established by hand, which in this thesis is one application (Section 5.3.4): a screen in $\mathit{scope}^*(x) \setminus \mathit{scope}(x)$ is a scope too small and a screen in $\mathit{scope}(x) \setminus \mathit{scope}^*(x)$ is a scope too large. Everywhere else the thesis reports the computed scope and says so.

The empty computed scope is likewise two situations, and conflating them would hide a defect inside a property of the application. A site is *unreachable* when $\mathit{scope}^*(x) = \varnothing$: the code exists and no screen can reach it, so contributing no edge is the correct answer. A site is *unresolved* when $\mathit{scope}(x) = \varnothing$ because no rule of the analysis reaches it — a navigation in a service nothing is known to inject, or behind a construct the reader could not follow — and the true scope is simply unknown. Both yield $\bot$, so $\bot$ alone does not say which holds. The extractor therefore does not let an unresolved site vanish: it records a note naming the construct and anchors the site at an unplaced origin, which is what makes the unresolved sites countable in Chapter 5 rather than indistinguishable from code that is genuinely unreachable.

Three elements of the domain are named, because attribution anchors edges at them. Writing $r' \succeq r$ for the reflexive ancestor relation on routes, that is r' is r itself or an ancestor of r in the route tree, they are

$$\mathit{screen}(r), \qquad \mathit{subtree}(r) \;=\; \{\, \mathit{screen}(r'') \in S \;\mid\; r \succeq r'' \,\}, \qquad \top \;=\; S,$$

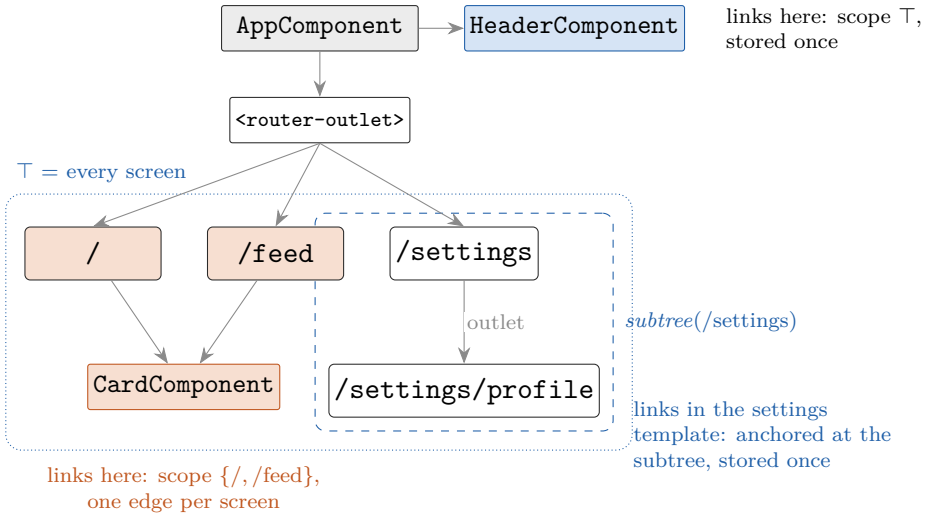


Figure 3.1: Scopes in a small application. The header is rendered next to the outlet, so its links fire from every screen. The card is rendered inside two unrelated screens, so its scope is the union of the two, which is none of the named elements. The settings template is rendered on its own screen and on its child screen, which is exactly *subtree*(/settings). Grey arrows show component nesting and outlets.

and they form the chain

$$\bot \sqsubseteq \mathit{screen}(r) \sqsubseteq \mathit{subtree}(r) \sqsubseteq \top.$$

The chain is stated for a route r with $\mathit{component}(r)$ defined. For a prefix route, which has `children` but no `component`, $\mathit{screen}(r)$ is undefined and only $\mathit{subtree}(r)$, the set of the screens of its descendants, is defined. The chain then reads $\bot \sqsubseteq \mathit{subtree}(r) \sqsubseteq \top$. These names are a representation device for anchoring edges, not a restriction of the domain. The join of two scopes is their union, not the least named element above both: a component mounted at two unrelated leaf routes has the scope $\{\mathit{screen}(r_1), \mathit{screen}(r_2)\}$, which is none of the three named elements. The names matter for storage, where an edge anchored at $\top$ or at $\mathit{subtree}(r)$ is kept once rather than once per screen. Table 3.2 assigns a scope to each Angular construct. Figure 3.1 shows the three kinds of scope in a small application, and Figure 3.2 shows the domain for three of its screens.

The row for services is why a simple traversal of the component tree is not enough. A service has no scope of its own. Its scope is the join of the scopes of the places that call it, which may themselves be services. Attribution is therefore computed as a fixpoint over the input relations of Section 3.2.3. The outlet relation gives the initial scopes, and scopes are propagated along the component nesting relation N, the call graph CG and the dispatch relation D, with $\mathcal{P}(S)$ as the abstract domain. This is a monotone dataflow problem in the sense of Kildall [37, 54], and two properties of it do separate work. Finite height gives termination. The height of $\mathcal{P}(S)$ is the number of screens $|S|$, so the scope of one node can rise at most $|S|$ times before it reaches $\top$, and the iteration can make only finitely many changes. Monotonicity of the transfer functions gives the result: the iteration reaches the least solution of the constraint system, and that solution does not depend on the order in which

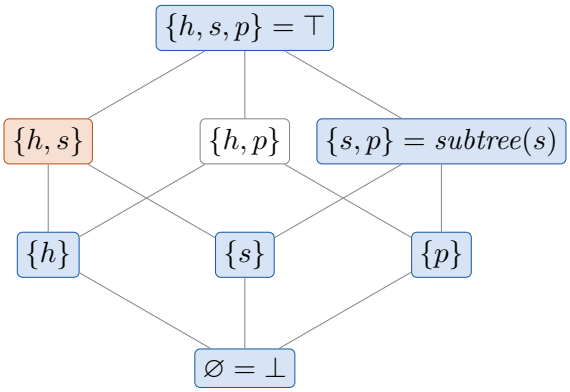


Figure 3.2: The scope domain $\mathcal{P}(S)$ for three screens: h for `/`, s for `/settings` and its child p for `/settings/profile`. Shaded elements are the named scopes at which edges are anchored. The join is set union: a component rendered in both h and s gets $\{h\} \sqcup \{s\} = \{h, s\}$, marked in orange, which is not a named element, so its edges are stored per screen. The height of the lattice is $|S|$.

Table 3.2: Scope of each construct that can contain a navigation site.

Construct	Scope
component above the router outlet (the shell)	$\top$
component of route r	$subtree(r)$
component mounted at routes $r_1, \ldots, r_k$	$subtree(r_1) \sqcup \cdots \sqcup subtree(r_k)$
component rendered in the template of another component	join of the scopes of the components that render it. The prototype applies this row only to components that no route mounts (Section 3.3)
method of an injectable service	join of the scopes of its callers
`canActivate` or `canMatch` on route r	$subtree(r)$
HTTP interceptor	$\top$
NgRx effect for action a	join of the scopes of every dispatcher of a

nodes leave the worklist. The transfer functions here are monotone because the only operation they apply to a scope is a join with another scope, and union is monotone in both arguments.

A worklist solver re-examines a node once for each rise of one of its predecessors, and the work done for a node is proportional to its out-degree in $N \cup CG \cup D$, so a run makes at most

$$O\Big(|S| \cdot (|N| + |CG| + |D|)\Big)$$

transfer-function applications. Each application is a union of two subsets of S, which costs $O(|S|)$ with scopes held as bit sets, so the running time is bounded by $O(|S|^2 \cdot (|N| + |CG| + |D|))$. This is the bound for the full model.

The part of the analysis that is implemented, the nesting and outlet relations, is the full model with CG and D empty, so the bound above specialises to it. The implemented pass is cheaper than that specialisation, because reachability from

each source needs no set-valued joins. Scopes are propagated along the component nesting graph from the shell and from the component of each screen, which is plain reachability and costs

$$O\Big(|S| \cdot (|C| + |N|)\Big),$$

one traversal of the nesting graph per screen, where C is the set of components. What makes the propagation necessary in both cases is that scopes travel transitively and the scope of one node can rise more than once, once for each screen that reaches it. Cycles are not the reason. The nesting and outlet relations the prototype implements may contain cycles, since mutually recursive templates are legal, and the worklist handles them; a cycle in CG or D likewise only means that a node can be re-examined after one of its own successors.

3.2.3 Input relations

Four relations, in order of increasing difficulty, provide the input to the fixpoint computation. *Component nesting*: $A \to B$ when A's template instantiates B's selector, resolved within the correct import scope; matching selector text globally is unsound, since two components may share a selector string in different scopes. *Router outlets*: components on the path from the root to the outlet form the shell and take $\top$; components below the component of route r take its scope $\mathit{subtree}(r)$; a named outlet carries a second mount, which makes auxiliary routes representable without separate treatment. *Call graph with dependency injection*: a call links to a method only after resolving the receiver's type and its binding in the relevant injector. Resolution follows class hierarchy analysis [17], with Angular's provider declarations as the source of bindings, as recommended for framework-heavy code [3]. Where a token admits several implementations the analysis joins over all of them, which is one source of *may* modality. *Dispatch relations*: a dispatch is treated as a call-graph edge from every dispatcher to every handler, which admits NgRx effects and router event subscriptions under the same fixpoint.

Algorithm 1 gives the computation, and its propagation steps are the transfer-function applications bounded above. A step adds a screen to a scope only when an edge of N, CG or D carries it there, and scopes only grow, so what the algorithm computes is the least solution of the constraint system that Table 3.2 states. In the model a component that is both mounted by a route and rendered in the template of another component therefore holds the join of the two scopes. Section 3.3 reports that the prototype does not propagate into a component that a route mounts, so it computes the least solution of a restricted system rather than of this one.

3.2.4 Guards as program points

A guard that returns a `UrlTree` is itself a navigation: a redirect edge from $\mathit{subtree}(r)$, typically to a login screen. Treating guards only as labels on inbound edges misses this edge class entirely. Further, the guard of an edge is the conjunction of the conditions on the containment path from screen to call site (structural directives) with the guards of the target route. Reporting only the second part gives a weaker

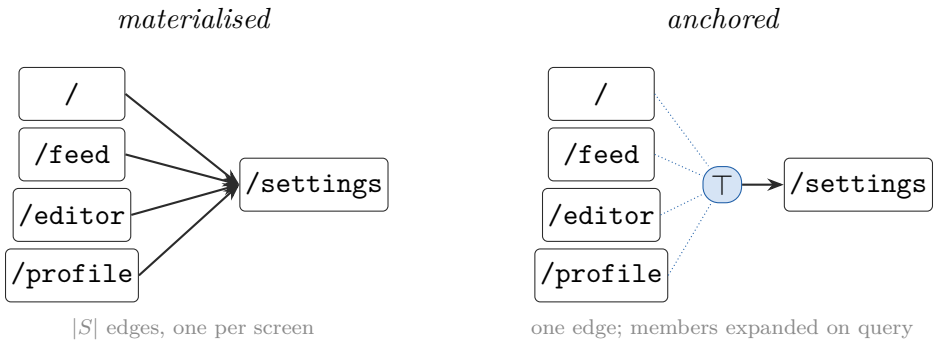


Figure 3.3: The same header link stored two ways. Materialised, it becomes one edge per screen. Anchored, it is stored once at the scope node $\top$, and $edgesFrom(r)$ adds it to the edges of any screen r when asked. Claim 3.2 states that both forms describe the same transitions.

condition than the true one. In the baseline, for example, a link that is rendered only inside `@if (isUser())` was labelled with the authentication guard of its target route. That guard is satisfied by any logged-in user, including users who are not the owner and who therefore never see the link.

3.2.5 Boundary

A navigation inside a signal effect has a firing condition that is a data dependence on a reactive graph. As Section 2.7 notes, only the read set is statically visible. The model gives such edges the modality *unknown* and records the set of signals read by the effect as the symbolic guard; no pass in this version emits one. The analysis does not try to determine when these edges fire. It marks this limit explicitly instead of giving a result that looks more precise than it is.

3.2.6 Anchored edges

If the result of attribution were stored explicitly, a single link in the application shell would produce one edge for every screen, and the size of the graph would be bounded by $|S| \cdot |sites|$, where *sites* is the set of navigation sites. For the largest application in the corpus this bound is 605×1344. Instead, each edge is stored once, anchored at its scope, and the set of edges leaving a particular screen is computed when it is requested:

$$edgesFrom(r) \;=\; E_{\top} \;\cup \bigcup_{r' \succeq r} E_{subtree(r')} \;\cup\; E_{screen(r)},$$

where E_X is the set of edges anchored at scope X and $r' \succeq r$ is the reflexive ancestor relation on routes introduced above, so that the term for $r' = r$ contributes $E_{subtree(r)}$ itself. The query is made for a screen, so $component(r)$ is defined, while r' ranges over all ancestors of r, prefix routes included. An edge whose scope is some other screen set is stored at each of its screens and reaches $edgesFrom(r)$ through the $E_{screen(r)}$ term. Figure 3.3 contrasts the two representations.

Claim 3.2 (Expansion)**.** *The expansion of the anchored edge set equals the materialised edge set.*

3.3 Implementation

The extractor, *uigraph*, is available as open source. It consists of a core that is independent of any particular framework and a set of adapters, one per framework. The core defines the graph model, its representation on disk, and the operations over graphs. Each adapter maps the source constructs of one framework onto the shared model, following a fixed interface. The Angular adapter reads route configuration, templates and class code with the TypeScript compiler API, and emits nodes for screens and edges for `routerLink` attributes and `Router.navigate` calls, each with the rule identifier and source location that produced it as witness.

Scope attribution is implemented as a separate pass in the Angular adapter, enabled with the option `-attribution`. With the option off, the extractor produces exactly the baseline edge set; this was checked on every application in the corpus. The pass implements two of the four input relations of Section 3.2.

Component nesting. Every component in the application, excluding test hosts and stories, is read with its element selectors and its template. An edge $A \to B$ is added when A's template contains an element with B's selector. When a selector belongs to more than one component, the candidates are narrowed to those that A's file imports; if none is imported, the analysis joins over all of them and records a note. An attribute selector is matched the same way: a directive is rendered by the templates that carry its attribute, so it has a scope exactly as a component does.

Router outlets. The route tree is recorded during route extraction. A route component's template is rendered on its own screen and on every descendant screen, so its navigation sites get the scope $\mathit{subtree}(r)$. A component that is not routed, is not referenced by any template and holds the primary `<router-outlet>` is the application shell, and everything it renders gets the scope $\top$. A component that is not routed and not referenced, but whose subtree contains the outlet, is most likely mounted by a route the extractor cannot see, for example through a helper function that wraps a route table. It is also treated as shell, but its edges are capped at *may*, so that Claim 3.1 is not put at risk by a scope that may be too large.

The pass departs from Algorithm 1 in two respects. The first is that it does not propagate a scope into a component that a route mounts: a routed component keeps $\mathit{subtree}(r)$ and does not also receive the scope of a component whose template renders it. The prototype therefore computes the least solution of the system of Table 3.2 with the template row restricted to targets that no route mounts. The result is contained in the solution the full system would give, so a navigation site in such a component can be attributed to fewer screens than the model allows, never to more. A scope that is too small loses edges and cannot invent them, which is why the restriction cannot put Claim 3.1 at risk; what it costs is recall, and the constructs it strands are counted in Chapter 5.

The second departure is granularity. Algorithm 1 ranges over every component

and callable, so each method of a service has a scope of its own. The pass joins per file: the screens of every component that injects a class are collected against that class's file, so two methods of one service called from different components share a single scope, as do two services declared in one file. A method is therefore attributed to the screens of its file's callers rather than to its own, which is a widening, and these sites are held at *may* for that reason. Separating them is what the call graph of Section 3.2.3 is for, and it is the relation this pass does not implement.

Anchored edges. Edges with scope $\top$ are stored once at a node of kind `scope`. Edges whose screen set is exactly $\mathit{subtree}(r)$ are stored once at a scope node that lists the members of that subtree. Other screen sets are stored as one edge per screen. The core library provides the expansion query $\mathit{edgesFrom}(r)$ and a function that materialises all anchored edges, which is used to test Claim 3.2.

The call graph with dependency injection and the dispatch relations are not implemented in this version, so a navigation site outside a component has no scope from the model itself. Three approximations of one stand in, and Section 5.5 measures what they recover: a guard's scope is the set of routes that name it in `canActivate` or `canMatch`, which the route configuration states outright; a service's is the join over the components that inject it, read off constructor parameters and `inject` calls, which is the join the model specifies taken per class rather than per method and so can be wider than the real scope; and an effect, being registered for the lifetime of the application, is given $\top$. Edges from all three are capped at *may*. A class nothing injects still has no scope, and the evaluation counts those in the defect class "Attribution, service" of Table 4.2. The pass is covered by unit tests for each of the cases above, including a test that the baseline is unchanged when the option is off.

One change was made to the baseline itself. For components with an inline template, the witness of an edge pointed at the line where the template starts rather than at the construct. The witness now points at the construct's own line. This can change witness locations but no edge. On the corpus, the baseline graphs with and without this change are identical, including witnesses.

Algorithm 1 Scope attribution as a worklist fixpoint over $\mathcal{P}(S)$. The loops marked *model only* belong to the full analysis and are not implemented in the prototype evaluated in Chapter 5.

Require: routes R with route tree, and the guards $\mathit{guards}(r)$ that route r names in `canActivate` or `canMatch`; components C; nesting $N \subseteq C \times C$; HTTP interceptors I; call graph CG; dispatch relation D

Ensure: $\mathit{scope}(x) \in \mathcal{P}(S)$ for every component and callable x

for all x **do** $\mathit{scope}(x) \leftarrow \varnothing$
end for
for all $r \in R$ with $\mathit{component}(r) = c$ **do**
    $\mathit{scope}(c) \leftarrow \mathit{scope}(c) \cup \mathit{subtree}(r)$ ▷ own screen and outlet descendants
end for
for all c on the nesting path from the root component to the holder of the primary outlet **do**
    $\mathit{scope}(c) \leftarrow S$ ▷ application shell, $\top$
end for
for all $r \in R$ and $g \in \mathit{guards}(r)$ **do**
    $\mathit{scope}(g) \leftarrow \mathit{scope}(g) \cup \mathit{subtree}(r)$ ▷ guard named on r
end for
for all HTTP interceptor $i \in I$ **do** ▷ *model only*: registered for the application
    $\mathit{scope}(i) \leftarrow S$
end for
$W \leftarrow$ every x with $\mathit{scope}(x) \neq \varnothing$
while $W \neq \emptyset$ **do**
    take x from W
    for all y with $(x, y) \in N$ **do** ▷ x's template renders y
        PROPAGATE(x, y)
    end for
    for all y with $(x, y) \in CG \cup D$ **do** ▷ *model only*: DI calls, dispatch
        PROPAGATE(x, y)
    end for
end while
procedure PROPAGATE(x, y)
    if $\mathit{scope}(x) \not\subseteq \mathit{scope}(y)$ **then**
        $\mathit{scope}(y) \leftarrow \mathit{scope}(y) \cup \mathit{scope}(x)$; add y to W
    end if
end procedure

Chapter 4

Evaluation setup and research material

This chapter describes how the analysis of Chapter 3 is evaluated. Section 4.1 presents the corpus of applications and discusses why it can be considered a valid basis for the measurements. Section 4.2 defines the metrics used to answer each research question. Section 4.3 describes the five evaluation methods, what each of them can and cannot show, and the arrangements that keep the results reproducible.

4.1 Corpus selection and validity

4.1.1 Selection

Ten candidate applications were screened against six criteria. The criteria were applied in order of increasing cost, so that a candidate could be rejected cheaply before more expensive checks were made. The criteria were: (1) a real application rather than a library or template; (2) a nested, lazily-loaded route tree; (3) guards present, since guards are what produce conditional transitions; (4) an end-to-end test suite that drives a browser; (5) retrievable history in which tests and source change together; (6) an active repository. Six candidates satisfied all six criteria and were retained (Table 4.1). Each of them is fixed to a specific commit so that the measurements can be repeated on exactly the same code.

Four candidates were rejected. They are listed here together with the reason for rejection, since the rejected candidates are part of the selection protocol. `angular/components` is a component library with no product router. `vendure` has 169 end-to-end specifications, all of which exercise the GraphQL server and none of which drive the user interface. `gravitee` declares 618 routes but has 14 UI specifications. `SAP/spartacus` has a large Cypress suite, but its routing is configuration-driven in a way that the extractor does not currently support, so it was set aside as a possible candidate for later work.

The screening also produced an observation that influenced the design of the evaluation. Among the candidates examined, the size of the route tree and the density of end-to-end tests were inversely related. The largest applications had few or no tests that exercise the user interface, while the application with the most extensive navigation-oriented test suite was of medium size. As a result, no single application

Table 4.1: The corpus. Routes are the route entries reached by the independent route parser of Section 4.3, as it stands after the corrections of Section 5.5. A count marked ≥ is a lower bound: the parser records a blind spot for that application, so the entries behind it are not in the figure, and Table 5.16 gives how many such blind spots each application has. An earlier version of this table gave kubernetes/dashboard as a lower bound of 42 because the parser could not then follow its lazily loaded modules; it now reaches them. The marks that remain are on alfresco, ghostfolio, bitwarden, mifos, on these grounds: children not resolvable to a route array; matcher route: path not statically knowable; spread route source: not followed.

Application	Commit	Routes	Role in the study
gothinkster/angular-realworld-example-app	`dd99ed2c`	14	size floor; all literal paths
alfresco/alfresco-content-app	`b88d47f4`	≥57	87 Playwright specs including a navigation suite
ghostfolio/ghostfolio	`9884fa0b`	≥135	constant-valued route paths; self-hostable
kubernetes/dashboard	`0ba796d9`	140	mid-size control
bitwarden/clients (web)	`e40ce6f0`	≥168	highest guard density
openMF/web-app	`7f781796`	≥909	size ceiling

in the corpus provides both a large route tree and execution-based ground truth. The evaluation therefore applies the methods that require test suites only to the applications that have them, and the methods that do not require tests to all six.

4.1.2 Validity of an open-source corpus

Open-source corpora are common in empirical software engineering, and their threats to validity have been studied. Kalliamvakou et al. show that a large share of GitHub repositories are inactive, personal or not software projects, that stars do not measure quality, and that forks inflate counts [34, 35]. The remedy they recommend is to filter the candidates using explicit criteria and to report those criteria, which is what the selection procedure above does. The threat that remains is one of external validity. Open-source applications may differ from proprietary enterprise applications in size, in routing style and in the mechanisms used for navigation. In addition, I selected the corpus and I wrote the extractor, which introduces a possible selection bias.

Three measures address these threats. The selection protocol is reported in full, including the rejected candidates, and the criteria were fixed before any results were obtained. The corpus is also stratified across two orders of magnitude in the number of routes, so that any effect of application size is visible and not averaged away. Finally, the commits are fixed, and the evaluation harness is released with

the thesis so that the measurement can be repeated rather than taken on trust. A fourth measure is planned: a case study on a proprietary Angular application from industry, reporting only aggregate figures; this would be the most direct response to the external validity threat, and it is discussed further in Chapter 6. There is also no standard benchmark corpus for single-page applications. The web testing survey confirms that evaluations in this area are carried out on collections of applications chosen for each study [36]. For this reason the corpus and its manifest are reported as one of the outputs of the thesis.

4.2 Metrics

Each research question is answered with one main measure. They are defined here.

Navigation construct. A navigation construct is a `routerLink` binding in a template, or a call to `Router.navigate` or `Router.navigateByUrl` in class code, in the application source excluding tests. Constructs are found by a separately written parser. It shares no code with the extractor, but Section 5.5 qualifies what that independence covers: for the route-path forms the second round added, the two now resolve the same constructs by the same rules, and three of the parser's own corrections were made because it disagreed with the extractor. Attributes such as `routerLinkActive` are not constructs; counting them by substring was one of the corrections described in Section 4.3.2.

Conversion ratio (RQ1). The conversion ratio is the fraction of navigation constructs that are witnessed by at least one must edge. When several constructs produce the same edge, the extractor keeps the first as the edge's witness and records the others as merged witnesses, so every construct that yields an edge can be traced. The ratio is computed over constructs rather than edges because the number of edges depends on representation: the same construct can be stored as one anchored edge or as one edge per screen (Section 3.2). An earlier version of this measure divided the number of must edges by the number of constructs. It was replaced for that reason (Section 4.3.2).

Agreement between a scope and the rendered interface (RQ3). The measures above check nodes, edges and witnesses. None of them can be asked the question the contribution turns on: is the set of screens attribution computed for a navigation site the set that site can really fire from? The runtime method answers one direction of it. A scope says a site fires from certain screens, so the harness navigates to each screen the graph holds, lets it render, and reads the in-app links the DOM actually carries; those are compared with the edges the graph's own per-screen query yields at that screen.

The two directions are not equally decidable. A link the application renders at a screen that the graph does not have leaving it is unambiguous: the link is there, so either the site was attributed to too few screens or it was never read. The opposite — an edge the graph has and the DOM does not show — is weaker in two ways. A template renders links conditionally and this harness signs in to nothing, so an absent link may be correctly attributed and merely unreachable in the state observed. And

where the analysis could not resolve a site's target to a single address it contributes every address the static prefix admits, recording the edge at reduced confidence; such an address is not a claim that the screen links there, so the screen not linking there refutes nothing. The harness therefore judges this direction only over the predictions that name a destination exactly, and publishes how many those are, so a share is never read off a denominator that cannot support one.

Two bounds belong with the figure. The oracle sees a link only where the rendered page carries a readable target, which means an anchor's `href` or a static `routerLink` attribute; a `Router.navigate` call in an event handler leaves nothing in the DOM to read, so the sites it covers are the template-sourced ones. And a screen whose guard redirects it to a sign-in page without a backend renders another screen's links, so its scope cannot be judged from what rendered; such screens are counted apart. On this corpus that is most of them, and Section 5.3.1 gives both numbers rather than the share alone. A third bound is the corpus: the harness serves one built directory at the server root, which ghostfolio's per-locale build does not fit, since each of its bundles declares a base path of its own. That application is measured by every other method here and by none of this one.

The ablation and the site–screen ground truth (RQ3). Two further measurements answer a question the methods above leave open: whether the attribution computes a better set of screens than a simpler analysis, or only a larger one.

The first withholds the mechanisms of Section 3.2 one at a time and extracts the whole corpus at each level. *Owned* attributes a navigation site to the screen whose routed component's own file holds it, which is direct ownership and is what resolving the owning object yields in the Android literature. *Nesting* adds component containment: a component reached through template element selectors is attributed to the screens of the components that render it. *Rooted* adds the shell rule, so a component the application's root renders is attributed to every screen; since Oshima and Kishi assemble their page information from the root component as well as from the components beneath it (Section 2.4), that level, and not containment alone, is the one that measures how far the prior work reaches on this corpus. *Outlet* adds router-outlet descent, and *full* adds the injected-service join. The levels are nested because the implementation withholds results rather than computing them differently, and the harness checks that on the real graphs rather than assuming it: a (site, screen) pair present at one level and absent at the next is a defect in the switch, and no table is written when one is found.

The second supplies what no method above has: a ground truth. For one application the screens each navigation site really fires from were read off the sources by hand and recorded, with the derivation for each site, in `route-oracle/ground-truth/realworld.json`. Every level is then scored against it in both directions — a pair the application has and the level does not is a scope too small, a pair the level has and the application does not is a scope too large — which is the comparison the runtime oracle cannot make. Three limits belong with it. It is one application, chosen because it is small enough to read exhaustively. It is the author's reading, so it is not independent of the tool's author; it is published with its reasoning so that a reader can check it against the same sources. And it is checked in the one direction

available: the scorer reports every site the graph places that the ground truth does not list, which is the ground truth's own blind spot. That check found nine sites missing from its first version, because the search that enumerated them discarded every line carrying `routerLinkActive` and this application writes both attributes on one anchor.

Which ratio is "coverage". Several of the measures below are fractions of something over something, and more than one of them has been called coverage in the literature this thesis builds on. They are not interchangeable, and on this corpus they differ by a factor of fifty, so each is named here with the population it is a fraction of. *Node coverage* is declared screens that have a node, over the screens the independent parser declares — a figure that rises if less of an application is read, which is why the blind-spot count is printed beside it. The same quantity over the addresses the running framework mounts is a different and smaller figure, reported separately in Section A.5. The *conversion ratio* is navigation constructs witnessed by a *must* edge, over all in-scope constructs. *Recovered* is the same numerator widened to an edge of any tier, and on an application whose screens sit behind guards the two are far apart: almost every transition such an application has is conditional, so a corpus can be most of the way recovered and almost nowhere deterministic. *Accounted* is recovered plus the sites that name a reason for not being recovered, and it is the only one of these that is a claim about honesty rather than about reach. Where this thesis says coverage without qualifying it, it means node coverage; every other figure is named.

Loss breakdown (RQ2). Each construct is matched to the edges whose witness cites it. A construct with no such edge is *lost*, and it is assigned to exactly one defect class by the first rule in Table 4.2 that applies. Because the rules are ordered, the classes partition the lost constructs and their sizes can be compared within each application. Guard defects do not appear in this table, since a wrong guard mislabels an edge rather than removing it; they are measured by the witness check.

The nested branch decides a class from the state of the construct's *owning* route component. A construct can therefore be assigned to one of the node classes and still be converted once attribution gives it a scope through the shell or a subtree, because the scope it needs is not the one its owner would have supplied. Section 5.3 measures how often that happens.

A call of the form `navigate([], {queryParams})` changes only the query string of the current screen. It is not a transition between screens, so it is reported separately and not counted as a loss.

Change in coverage and must-tier precision (RQ3). The conversion ratio and the loss breakdown are measured on one commit of the extractor, run twice on identical inputs with the attribution pass disabled and enabled. Measuring one commit rather than two rules out any difference between the runs other than the pass itself, which two versions could not guarantee; Section 3.3 reports that with the pass off the extractor reproduces the baseline edge set exactly on every application. *Must-tier precision* is the fraction of must edges whose witness line contains a construct of the claimed kind with the claimed target, *and* whose destination node sits at an address the independent route set declares. The second half of that test was

Table 4.2: Rules that assign a lost construct to a defect class, in the order the harness tests them. The indented rules are the nested decision taken when the construct's owning route component has no node.

Class	The construct ...
Query only	changes only the query string of the current screen (`navigate([], {queryParams})`), so it is not a transition and is not counted as a loss
Named outlet	targets an auxiliary outlet (`{outlets: ...}`)
Attribution, service	has no owning component, or its owner is a class that is not a component: a service, guard, interceptor, resolver or effect. A site in a template whose owner cannot be resolved falls to *other* instead
Attribution, shared	is in a component that no route renders directly
Owner is a route component, but that component has no node:	
Component unlinked	a node for the owner's route exists, but the extractor did not link it to the component
Constant path	every declaration of the owner's route gives its path as a constant reference rather than a literal
Other	some declaration of the owner's route does have a node
Lazy boundary	some declaration of the owner's route is in a lazily loaded routes file
Node missing	a declaration exists but none of the above applies, or neither parser found a route for the owner
Constant target	owner has a node, but the construct's own target is not a literal
Other	matches none of the above; inspected by hand

added late and is the reason it is stated here in two parts: asking only whether the witness agrees with the edge's destination takes the destination for granted, so a node minted at an address the application never mounts passes every question the check asks. One application's lazily loaded reports module was read at the project root for exactly that reason, so the graph held `/:filter` where the application mounts `/reports/:filter`, and edges pointed at that address while the check reported the tier clean (Section 4.3.2). No count of those edges is given, because the defect is repaired and the graph that carried it no longer exists, so the figure cannot be re-measured against anything. RQ3 is answered positively only if coverage rises and must-tier precision does not fall.

Node-level recall. The fraction of distinct URLs visited by an application's own passing end-to-end tests that have a matching node in the graph. It is a cross-check on node extraction, which all edges depend on.

Detection rate (RQ4). The fraction of injected source changes that produce the predicted change in the graph, reported per mutation operator with its n. A change whose construct the graph does not contain is excluded rather than counted as a miss, since it can only repeat a coverage gap measured under RQ1. The rate is therefore conditional on coverage, and the number of excluded mutants is reported

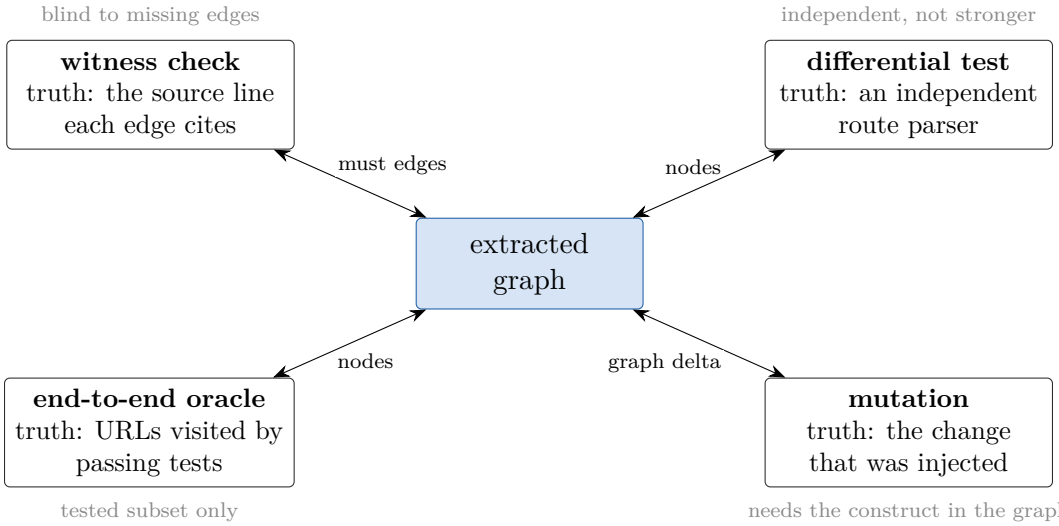


Figure 4.1: The four evaluation methods that read the applications' sources, the part of the graph each one checks, and where its ground truth comes from. The fifth, the runtime route probe, is not drawn here because its ground truth is the running application rather than any part of the graph. No method sees everything; the grey notes give the blind spot of each, as listed in Table 4.3.

alongside it.

4.3 Evaluation methods

Five methods are used. None establishes correctness alone, so Table 4.3 states what each can show and where it is blind. Figure 4.1 shows which part of the graph each method checks and where its ground truth comes from.

Four of the five read the application's sources. That shared footing is their common weakness: two readers of the same text can be wrong in the same way, and an agreement between them is then evidence of nothing. The fifth was added for that reason and is described last.

Table 4.3: Evaluation methods, the quantity each measures, and the blind spot each has.

Method	Quantity	Blind spot
Witness check	Must-tier precision. For every must edge, the witness file is re-parsed at the claimed line, the construct kind and target are compared, and the destination node's address is tested against the independent route set.	Cannot see missing edges. Target agreement is invalid for over-approximated may edges, whose witness proves only that the call site exists. The destination test is only as good as that route set: where both tools read a route table at the wrong prefix, they agree on a wrong address and the test passes. This is the gap the runtime route oracle below was built to close, and it was not hypothetical: Section A.5 reports 10 addresses on which both readers agreed and the running application mounted none of them.
Differential test	Disagreements with a separately written route-configuration parser.	Diagnostic, not a metric. The parser is independent, not stronger: its first version missed whole route tables in several applications until it was corrected (Section 4.3.2), and for the path forms added in Section 5.5 it is no longer independent of the extractor at all.
Test-source cross-check	Node-level recall against a fourth reader of the source. The end-to-end specifications of the application are parsed and the URL literals in them collected; a URL the application's own test suite names is an address its authors expect to exist, and the extractor is asked whether it minted a node there.	Reads test source text and runs nothing, so a collected string is an address a test *names*, not one a test was observed to reach, and whether the suite passes is not established by this method. Tested subset only. A direct `goto` is not a UI transition, so visit pairs are not counted as edges. Textual extraction under-samples click-driven navigation.

continued on the next page

Table 4.3 continued from the previous page

Method	Quantity	Blind spot
Mutation test	Detection rate over four operators: rename a path, remove a guard, delete a `routerLink`, retarget a `navigate`. Ground truth is the authored delta, so nothing is circular. Detection is judged on the node and edge sets and on the witness set, since several constructs can produce one edge.	A mutant whose construct is absent from the baseline graph re-detects a coverage gap and is excluded, as is a guard mutant on a screen that no edge enters. The screens a guarded route yields are looked up by what its subtree names, so a component several routes render maps to every screen those routes declare; that over-approximates, which errs towards scoring a mutant rather than dropping it. Detection is therefore conditional on coverage, and the attributed and unattributed graphs do not exclude the same mutants, so their overall rates are not taken over one set: the comparison between them is also reported over the mutants both can score, paired by operator, file, line and subject. The sample is drawn from the graph, so it is not independent of the artefact under test. Sampling is seeded and stratified by operator.

continued on the next page

Table 4.3 continued from the previous page

Method	Quantity	Blind spot
Runtime route oracle	Node-level soundness against the framework itself. Each application is built in its development configuration, loaded in a headless browser, and asked for the route configuration the Angular router holds; every lazily loaded subtree is expanded by calling the application's own `loadChildren` and reading the routes out of whatever it resolves to. The addresses the extractor mints are then compared with the addresses the framework mounts. Nothing in this method re-reads the route files, which is the point: the answer comes from the application's own code. Which addresses in that configuration count as mounted is itself a reading, so it is checked against the framework's behaviour: the harness navigates the running application to a list of addresses and records what the recogniser made of each one, before any guard runs.	Requires the application to build and boot, which fixes the method to applications that can be built without their server. It reads the configuration rather than the rendered screen, so a route that a guard always refuses still counts as mounted, and a route whose component fails to render is not distinguished from one that renders. An address a route claims through a `UrlMatcher` cannot be decided from the configuration at all, since the function is not spelled out there. A workspace application that composes the library a measurement is scoped to mounts the shell's own routes as well, so part of any difference is scope and not reading.

4.3.1 Preconditions

Two properties of the extractor were checked before any of the measurements were taken. The first is determinism: two extractions from the same unchanged source produce identical sets of nodes and edges, when compared on identifier, route, event, guard and modality after sorting. Without this property the differences observed in mutation testing could not be distinguished from noise. The second is the absence of accumulated state: extracting into an existing database gives the same graph as extracting after the database has been deleted. Without this property the results for a mutant could be affected by the earlier baseline run.

4.3.2 Corrections made to the protocol

Eight corrections were made to the protocol while it was being developed. They are described here because each of them would otherwise have led to an incorrect figure in this thesis, and because the underlying mistakes are general ones. Every figure quoted below is the one a superseded instrument produced, recorded so that the correction can be judged; none of them is reproducible with the harness this thesis ships, and none is cited anywhere else as a result. The few comparisons elsewhere that do rest on an earlier state of the extractor name the commit and read their figures from that commit's own generated results (Section 5.5).

In the test-source cross-check, a URL parameter observed in a test was at first allowed to match a literal segment of a route, which produced matches that did not correspond to real screens. After the rule was tightened, the recall figure for one application fell from 86.7% to 66.7%. A negative test, which visits a URL that must not exist, is now also excluded, which gives the 71.4 % reported in Chapter 5.

The first version of the witness check reported a precision of 44.7% for one application. On inspection, all 177 edges it had flagged were may edges with a confidence of 0.5 that referred to a single source line. They were the result of one over-approximated call site being connected to every declared route. The must tier of the same run had 69 correct edges out of 69.

In mutation testing, a mutant whose target does not appear in the baseline graph cannot show anything about the graph's sensitivity to change; it only repeats a coverage gap that has already been counted elsewhere. Three of the five mutation misses for one application were of this kind and were moved to a separate category.

The first denominator of the conversion ratio counted the substring `routerLink` in templates, which also matches the attributes `routerLinkActive` and `routerLinkActiveOptions`. For alfresco this counted 113 constructs where the parser finds 34. Constructs are now counted by the parser that also produces the loss breakdown, so the ratio and the breakdown share one definition.

The first version of the route parser used by the differential test did not look inside wrapper calls such as `Route.withShell([...])`, did not follow a lazily loaded NgModule to the routing module it imports, and walked lazily loaded route tables a second time without their prefix. On mifos it therefore reported that every declared screen had a node. After the correction it finds 610 declared screens, of which 58 have a node. The extractor was the same in both runs.

The conversion ratio itself was first defined as the number of must edges divided by the number of constructs. After attribution, this ratio rose from 5.1% to 75.7% for mifos, because a construct in a component rendered on many screens produced one edge per screen. So the rise came from how edges were stored. It is now computed per construct, and edges whose screen set is a whole subtree are stored once (Section 3.2).

The mutation harness patched the source by searching for the text of the construct, so a mutant aimed at one of several identical constructs edited the first of them instead of its own. In realworld the five guard mutants collapsed onto two sites, because the five `canActivate` properties are written with only two distinct texts. The harness also judged detection on the node and edge sets alone, which scored the

deletion of one of two identical links in a template as a miss, although the graph had behaved correctly: it kept the edge, which the second link still produces, and dropped only the witness that pointed at the deleted line. Detection is now judged on the witness set as well, which is the property change impact analysis actually needs. Three smaller changes followed from the same review. A retargeting mutant now points at another declared route instead of an invented one, so that it cannot be confused with a missing target. A guard mutant on a screen that no edge enters is excluded, because a guard is represented on the edges entering the screen it guards, so such a mutant can only repeat the edge-coverage gap already counted under RQ1. A rename mutant counts as detected when the renamed route appears in the graph, without also requiring the original node to disappear, since the same path segment may be declared in a second routing module. With the offset and witness corrections in place, on the same seed and the same sample, the detection rate for realworld changed from 71.4% to 95.2%. Sampling is seeded and stratified with a fixed quota per operator, and the detection rate is reported per operator with its n.

The eighth correction is to that guard exclusion rule, and it was found by reading the graph at the sites the rule had let through rather than by a figure that looked wrong. The rule asks whether any screen the guarded route yields is entered by a baseline edge, and it identified that route by the nearest path literal preceding the `canActivate` in the source. For a route that has children, that literal is the last child's path rather than the route's own; for an empty-path child it is the empty string, which is a segment of every absolute path and so satisfied the test whatever the application; and for a route whose path is a constant reference or a template literal there is no literal at all, which skipped the test. Four guard mutants that cannot be observed at all were therefore scored rather than excluded and reported as misses, which the discussion then explained as a defect in how the graph represents a guard; three of them guard screens no baseline edge enters and the fourth a route that yields no screen. The rule now matches the braces of the enclosing object literal to find the route, over a copy of the source with comment and string contents blanked so that a brace inside either cannot close the object early, reads what its subtree renders — a component class, or the module a `loadComponent` imports — and looks those up against the class and file each screen node carries; a route that declares no component and no populated children is excluded as well, since it yields no screen for a guard to be recorded on, and the detection check is keyed on the same screens rather than on a substring of a path literal. On the superseded instrument the run scored 68 of the 70 sampled mutants and detected 59, with 5 producing no change in the graph at all; Chapter 5 reports what the corrected rule gives on the same seed and the same sample.

Five of the eight corrections were found the same way, by a figure that looked too good or too bad to believe: the conversion ratio that rose to 75.7%, the precision that fell to 44.7%, the coverage that reached 100%, the construct count that tripled, and the detection rate that moved by more than twenty points. Each turned out to be a property of the measurement rather than of the extractor. A figure that is surprising is therefore checked against its inputs before it is written down, which is how the remaining figures in this thesis were arrived at.

4.3.3 Reproducibility

The four methods that read the sources are re-run by one command, `run-all.mjs`, which fetches each application at its fixed commit rather than from a branch, runs the extraction twice — with the attribution pass disabled and enabled — and writes a results file together with the raw output of each method. It needs two things the command itself cannot supply: the dependencies of the harness directory, which is outside the workspace and is installed with `npm ci` there, and a checkout of the extractor at the evaluated commit, which is passed to it. The extractor is run from its TypeScript source rather than from a build. An earlier arrangement built it instead, which required rewriting each package's `exports` field from source to build output before the built command could resolve its own sibling packages; that rewrite edited the checkout being measured, and it was the one step of this evaluation that could not be recorded in the repository. Running from source removes it.

The fifth method, the runtime route oracle, is re-run by its own documented command, because it needs each application built in its development configuration and served to a browser, which is a step the first command cannot take on a machine that has not built them. Its result files record no commit or runtime version, unlike the others, so the provenance guarantee below does not extend to them.

Each figure in the results file of the first four methods is recorded together with the commit of the extractor, the commits of the corpus applications, the version of the harness, and the version of the runtime. Every table in this thesis is generated from those files and none is entered by hand; where the prose states a figure it reads the same generated macro the table does, so a regeneration cannot leave a sentence behind. Several generators refuse to write at all rather than emit a figure they cannot account for: the census will not print its table unless every route entry falls in exactly one named bucket and the buckets sum to the route total, and the before-and-after comparison will not print unless every construct assigned to the attribution class is either recovered or carries a reason.

Two limits of this arrangement should be stated rather than discovered. The evaluated commit of the extractor must be one a reader can fetch, so the figures are reproducible only once that commit is published; and the version of the harness decides several figures independently of the extractor, so a result file is only comparable with another made by the same harness version, which is why each one records it.

Chapter 5

Results

The figures in this chapter were produced by the harness of Section 4.3 on the corpus of Section 4.1. Every table is generated from the harness's results files. The baseline is the extractor without scope attribution; the attributed version is the same code with the attribution pass enabled.

5.1 The two levels of loss (RQ1)

RQ1 is answered at two levels, and the two give very different answers. The first is whether the graph holds the screens the application declares at all; the second is how much of the application's navigation becomes a deterministic transition between them. The first bounds the second, because a transition cannot start or end at a screen the graph does not have.

Table 5.1 gives the second measure. Measured before the fourth must-tier correction of Section 5.5, the extractor without the attribution pass recovers a small fraction of the navigation constructs as must edges; after it, it recovers none on any of the 6 applications, without attribution or with it. Edge counts in that table must be read per tier and not summed: the may column of the largest application is almost entirely one over-approximation from a single unresolvable call site, not that many distinct transitions.

Table 5.2 and Figure 5.1 give the first measure, comparing the nodes the extractor mints against the screens an independently written parser finds declared. Against that denominator node extraction is complete: on all six applications every declared screen has a node. Two things have to be said in the same breath, because the figure invites a reading neither supports. The denominator is the screens a *static reader* can enumerate, and against the addresses the running framework actually mounts the same node set is 892 of 1146 (Section A.5) — the difference being almost entirely one unreadable construct in one application. And the two static readers reached their agreement partly by being corrected against each other during this work, so their agreeing exactly is weaker evidence than it was when they were written independently; the runtime method is the external check for that reason, and it confirms the other direction, that no node sits at an address the framework mounts nothing at. That was not true of the extractor this evaluation began with, which read one application as a single node for the 84 screens it declares and the largest as

Table 5.1: Construct-to-transition conversion per application, baseline. Conversion is the fraction of constructs witnessed by a must edge; the edge columns count edges. Measured before the fourth must-tier correction of Section 5.5, after which no edge is must and conversion is zero on every application.

Application	Constructs	Nodes	Must	May	Conversion
realworld	40	10	7	18	12.5%
alfresco	34	37	0	7	0.0%
ghostfolio	198	112	0	60	0.0%
k8s dashboard	72	74	0	3	0.0%
bitwarden	132	105	10	41	12.9%
mifos	1344	684	1	5575	0.1%

Table 5.2: Node extraction against the independent parser, in both directions: declared screens that have a matching node, and nodes for which the parser holds no declared screen. The blind-spot column counts route entries the parser could not follow, which bounds what either direction can show.

Application	Declared	Nodes	Matched	Coverage	Unmatched	Blind spots
realworld	10	10	10	100.0%	0	0
alfresco	26	27	26	100.0%	1	10
ghostfolio	84	84	84	100.0%	0	2
k8s dashboard	67	67	67	100.0%	0	0
bitwarden	98	98	98	100.0%	0	1
mifos	605	606	605	100.0%	1	1
All		892			2	

under a tenth of its screens; Section 5.5 reports what had to be repaired to reach the figures in this table, and Appendix A.1 the handful of addresses the two readers still disagree about.

Completeness here is a claim about the screens the readers can *see*, and the blind-spot column bounds it: a route entry neither reader can resolve to an address is outside the denominator, and the applications that have such entries say so in their own soundiness notes. Refusing to read more of an application would raise this column rather than lower it, which is why it is printed beside the coverage figure and not instead of it.

5.2 Which failure is worth an analysis (RQ2)

Table 5.3 lists the defect classes and the evidence for each, separating the named evaluation methods from the other observations. Four of the five accepted classes rest on one named method and are carried to two by an observation: attribution, guards, named outlets and constant paths. The attribution class is the weakest in this respect, with one method and three observations, and it is the class the analysis of Chapter 3 addresses. Its observations are not weak evidence in themselves, since

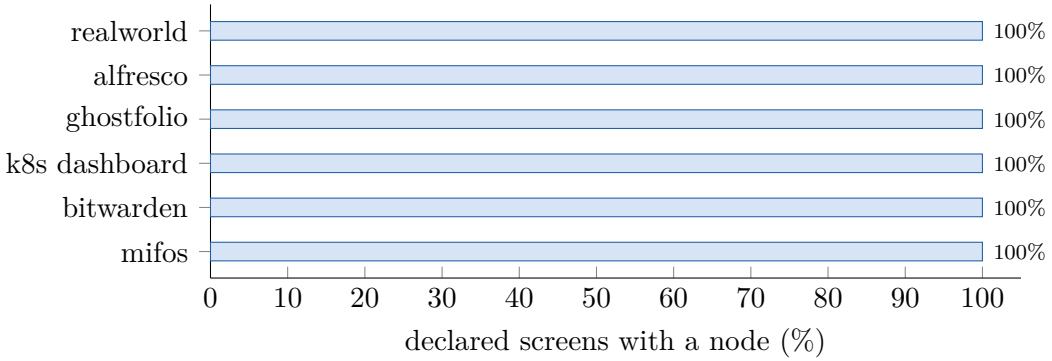


Figure 5.1: Node coverage: the share of declared screens that have a node in the graph. It is complete on every application; the blind-spot column of Table 5.2 bounds what that means, since a route entry neither reader can resolve to an address is outside the denominator.

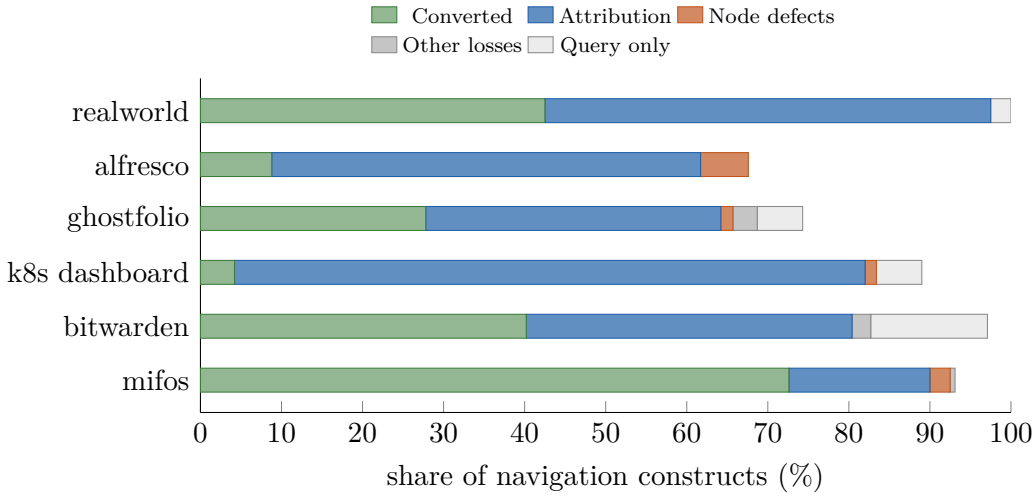


Figure 5.2: What happens to the navigation constructs of each application without the attribution pass. Attribution losses are the largest class in every application; the node classes are empty on this instrument. The exact counts per class are in Table 5.4.

two applications producing no edges at all is hard to explain any other way, but they are not independent instruments. The five classes found in the first round all have at least two confirmations. The quantitative breakdown below revealed a sixth candidate, a node that exists but is not linked to the component that renders it. It is confirmed only by the comparison between the route parser and the graph, so it is reported as a candidate until a second method confirms it.

Table 5.4 and Figure 5.2 assign every navigation construct to one outcome using the rules of Table 4.2. Of the 1820 constructs in the corpus, Table 5.4 shows how many convert onto each tier and why the rest do not; its must row is the instrument before the fourth must-tier correction of Section 5.5, after which that row is empty. Guard defects are measured separately (Section 4.2).

Attribution is the largest loss class in every application in the corpus, and by a wide margin: of the 1820 constructs, the two attribution classes hold 455 between

Table 5.3: Defect classes and the evidence for each. A class is admitted on two independent lines of evidence, at least one from a named evaluation method; the methods column counts only those. This summary is compiled by hand; it is not harness output.

Class	Evidence	Methods	All
Attribution: navigation outside route components is invisible	mutation misses; multi-mount edge absent; manual audit; zero-edge applications	1	4
Lazy module boundary not followed	route parser; test-source cross-check; mutation	3	3
Guards unreliable in both directions	witness check at commit f17a302; source survey of the guard factory and the call-form `canActivate` (Section 5.5)	1	2
Named router outlets not modelled	test-source cross-check; source survey	1	2
Constant-valued route paths not resolved	route parser; node-count collapse	1	2
Candidate: node not linked to its component	route parser against graph	1	1

Table 5.4: Outcome of every navigation construct, baseline. Columns: realworld, alfresco, ghostfolio, k8s dashboard, bitwarden, mifos. Measured before the fourth must-tier correction of Section 5.5, after which every construct in the *Converted, must* row converts onto may instead.

Outcome	rw	alf	gf	k8s	bw	mif	Total
Converted, must	5	0	0	0	17	2	24
Converted, may	12	3	55	3	36	974	1083
Attribution, shared component	21	10	63	51	38	224	407
Attribution, service	1	8	9	5	15	10	48
Lazy boundary	0	0	0	0	0	0	0
Constant path	0	0	0	0	0	0	0
Component unlinked	0	0	0	0	0	0	0
Constant target	0	0	0	0	1	5	6
Node missing, other	0	2	3	1	0	34	40
Other	0	0	6	0	2	3	11
Dynamic destination	0	4	50	8	4	92	158
Source the analysis cannot place	0	0	0	0	0	0	0
Query only (not a transition)	1	0	11	4	19	0	35
Excluded: names no destination	0	0	1	0	0	0	1
Excluded: navigates a named outlet	0	7	0	0	0	0	7
All constructs	40	34	198	72	132	1344	1820

them, and no other class holds a tenth as many. Most of it comes from components several screens render rather than from services.

That ranking is a result of the repair campaign rather than of the baseline. When this evaluation began, two node-extraction defects dominated the corpus: one application declared every route path as a reference into a constant table, which collapsed its graph to a single node, and the largest application hid most of its route tables behind lazy module boundaries the extractor did not follow, while a further large group of its screens had nodes with no link to the component that renders them. Those classes are empty in Table 5.4 because the causes were found and repaired; what that cost, and the evidence that the repairs were repairs, is Section 5.5. The ranking matters because it is what justifies spending an analysis on attribution rather than on anything else: once the extractor reads what the applications declare, the navigation it still cannot place is almost entirely navigation with no single owning screen.

The classes also interact, and the interaction runs both ways. A construct in a shared component that is only used inside screens which have no node is counted as attribution, although attribution alone cannot recover it. In the other direction, a construct whose own route component has no node is counted as a node defect, yet attribution can still reach it through a shell or subtree scope and convert it. The 455 constructs the attribution classes hold are therefore neither a floor nor a ceiling on what scope attribution recovers. Section 5.3 measures both directions.

Table 5.5: Results of the witness check and the test-source cross-check, baseline. Mutation is reported separately in Section 5.4, on the attributed graph. This summary is written by hand from the harness output rather than generated.

Method	Result	n
Witness check, must tier	20/20 agree on their target, at every source location each edge cites; target agreement is necessary for Claim 3.1 and not sufficient for it. Measured before the fourth must-tier correction of Section 5.5, which empties the tier.	20
Test-source cross-check, alfresco	10 of 14 of the visited URLs have a node; one negative test excluded.	14

Table 5.5 reports the witness check and the test-source cross-check on this baseline. Section 5.5 gives the must tier its own treatment, because what the check reads and how an edge cited by several constructs is judged both changed in the course of this work, and the figure is not comparable across those changes.

5.3 Scope attribution (RQ3)

The analysis under evaluation is the one Chapter 3 states. Every navigation site is anchored at a *scope*, the set of screens from which it can fire, so a scope is an element of the powerset lattice $\mathcal{P}(S)$ ordered by inclusion with union as join (Section 3.2.2). A site written inside the component of a leaf route has that one screen as its scope; written in the component of a route that has children, it has $\mathit{subtree}(r)$, because that component stays mounted while any descendant is active — the shell rule of Section 3.2. A site written in a component that several screens render, or in a service that several components call, has no single owning screen, and its scope is the join of the scopes of the places that reach it; because a service may call another service, the result is a fixpoint over the component nesting relation, the call graph and the dispatch relation, with termination from the finite height $|S|$ of the lattice (Section 3.2). Edges are not materialised per screen: each is stored once, anchored at its scope, and the edges leaving a screen are computed when asked, which is what keeps the graph off the $|S| \cdot |\mathit{sites}|$ bound (Section 3.2.6).

What that buys is measured by running one commit of the extractor twice over the same inputs with the pass disabled and enabled, so nothing but the pass differs. Three quantities decide the answer: how much navigation the pass recovers, whether it costs the deterministic tier anything, and what it still cannot place. The third is the one that says where the analysis as implemented stops, and Section 5.5 returns to it once the extractor underneath has been repaired.

Table 5.6 and Figure 5.3 compare the extractor with and without scope attribution on identical inputs. The comparison is made construct by construct: a construct is *recovered* if it was lost to attribution in the baseline and is witnessed by an edge after attribution.

Table 5.6: Before and after scope attribution. Conversion in percent and the change in percentage points; must-tier edges that pass the witness check; constructs that the loss rules assigned to attribution in the baseline, and how many of them converted into must and into may edges. Conversions of constructs assigned to other classes are in Table 5.8. Measured before the fourth must-tier correction of Section 5.5, which moves every must edge in both runs to may.

	Conversion			Must-tier clean		Attribution losses, recovered		
Application	Before	After	pp	Before	After	Before	must	may
realworld	12.5%	30.0%	+17.5	7/7	9/9	22	7	15
alfresco	0.0%	0.0%	+0.0	–	–	18	0	4
ghostfolio	0.0%	0.0%	+0.0	–	–	72	0	26
k8s dashboard	0.0%	0.0%	+0.0	–	–	56	0	8
bitwarden	12.9%	10.6%	-2.3	10/10	10/10	53	0	15
mifos	0.1%	0.1%	+0.0	1/1	1/1	234	0	210
All						455	7	278

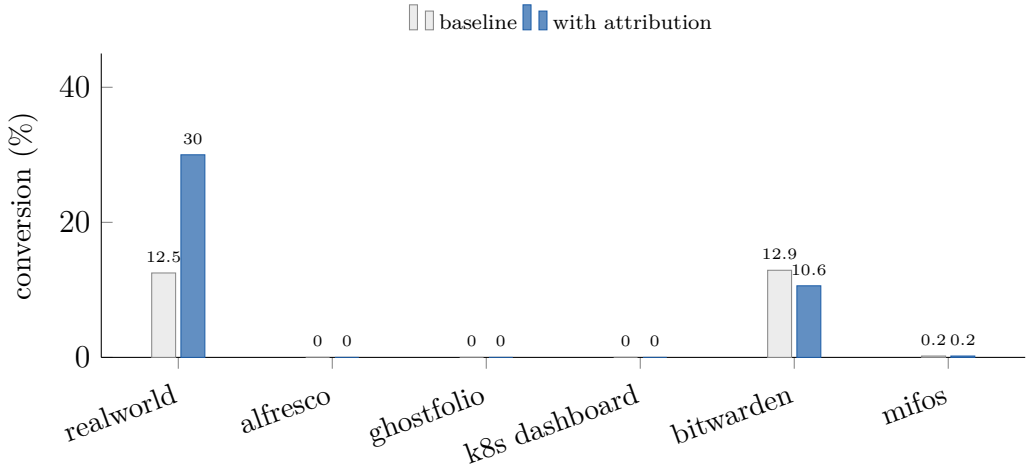


Figure 5.3: Conversion ratio before and after scope attribution, on identical inputs.

Attribution recovers 285 of the 455 constructs the loss rules assign to it, 62.6 % of that class, and it recovers some on every application in the corpus. The graph roughly doubles, from 5859 edges to 11601. Measured instead by the deterministic conversion ratio RQ1 is defined on, only 1 of the six applications move at all. That is the first thing the two measures disagree about, and the reason both are reported: on the instrument the table measures, 7 of the recovered constructs convert onto the must tier and 278 onto the may tier, and after the fourth must-tier correction of Section 5.5 all 285 land on may. An application whose screens all sit behind a guard can gain a great deal of navigation and almost no *deterministic* navigation, and Section 5.5 returns to why.

On the instrument the table measures, precision on the must tier did not fall: the tier grew from 18 edges to 20, and every edge in it passed the witness check in both runs. After the fourth must-tier correction of Section 5.5 the tier is empty in both runs — 0 must edges without attribution and 0 with it — so the precision RQ3

Table 5.7: The anchored edge set against its expansion. *Anchored* is what the graph stores, *expanded* what the per-screen query yields, and *independent* a second materialisation written for this check. Claim 3.2 requires the last two to be equal; the check refuses to emit this table if they differ on any application.

Application	Screens	Anchored	Expanded	Independent
realworld	10	55	99	99
alfresco	27	56	75	75
bitwarden	98	271	821	821

asks about holds only in the sense that attribution adds no must edge, and there is no larger tier for it to have kept clean. No construct converted in the baseline is lost after attribution: following every construct by its identifier across the two runs finds 0 that leave the converted classes.

The witness check also records the edges outside the must tier. Chapter 3 excludes them from the precision claim, because target agreement is not a meaningful test for an edge the extractor produced by over-approximation, and the counts are given here so that the exclusion is visible rather than assumed. On the four applications whose per-edge records are kept, the great majority of non-must edges do not agree with their witness's target, before attribution and after it, and almost all of that is one over-approximated call site in the largest application seen one edge at a time (Section 4.3.2). The count grows with the may tier and says nothing about the must tier, which is why Chapter 3 excludes it from the precision claim and why this paragraph gives no ratio for it: a ratio would invite exactly the comparison the exclusion forbids.

The anchored representation was checked on the same graphs. Claim 3.2 requires the expansion of the anchored edge set to equal the materialised edge set. The check cannot be a comparison between the expansion query and the library's own materialisation function, because that function is a loop over the query and the two can only disagree about which nodes they iterate. The anchored edges are therefore materialised independently, by walking the edge list and fanning each scope-anchored edge over the screens its anchor stands for, with its own deduplication.

The two agree on every application the check was run on, which Table 5.7 reports: the check refuses to write that table at all if the two sets differ anywhere. Those ratios are also the only measurement of what the representation saves, and they are the reason it exists — on bitwarden the materialised edge set is 3.0 times the size of what is stored. What the check exercises is the member walk and the deduplication key; the definition of a scope's membership is shared by both paths and is not tested by it, so the claim is supported on 3 applications and on fixtures rather than proved. On two of the three the library's own materialisation function returns a larger set than either, which is the iteration difference the previous sentence predicts and not a disagreement about the edge set.

Table 5.8 gives the same recovery by the class each construct held in the baseline, and on this instrument it says something the earlier one did not. Every conversion comes out of the two attribution classes: 7 onto the must tier and 278 onto the may

Table 5.8: Where the converted constructs came from. Each row is the class the loss rules assigned to the construct in the baseline; the columns give the tier it converted into after attribution. Constructs are followed by identity, not matched by source location. The must column is the instrument before the fourth must-tier correction of Section 5.5, after which every conversion lands on may.

Baseline class of the construct	must	may	total
Attribution, shared component	7	261	268
Attribution, service	0	17	17
Out of the attribution classes	7	278	285
Out of the node classes	0	0	0
All conversions gained	7	278	285

Table 5.9: Why attribution losses remain after attribution.

Reason	rw	alf	gf	k8s	bw	mif	Total
Owner component not reached from any screen	0	8	17	5	19	1	50
In a service or guard (not implemented)	0	6	4	4	10	7	31
Scope found, target screen has no node	0	0	23	2	6	3	34
Scope found, target fully dynamic	0	0	2	37	1	13	53
Scope found, not explained	0	0	0	0	2	0	2

tier on the instrument the table measures, all of them onto may after the fourth must-tier correction of Section 5.5, with none out of the node classes at all. On the extractor this evaluation began with — commit f17a302, whose generated results these figures also come from — 41 of 79 deterministic conversions, 51.9 %, came out of constructs the loss rules had assigned to node defects, against 38 out of the attribution classes. That was evidence that the classes were not independent and that the attribution class was not a ceiling. That evidence is gone, and for a plain reason: the node classes are now empty (Table 5.4), so there is nothing in them left to convert. The classes are still not independent — a construct whose target screen has no node is an attribution loss the node level caused — but on a corpus whose nodes are complete the question stops being measurable from this table.

Table 5.9 classifies each construct that stays lost.

Every one of the 170 constructs that stays lost carries a reason, and the two tables close the class between them: 285 recovered plus 170 with a reason is the 455 the rules assigned, which the generator asserts before it will write either table. The reasons are of three kinds. Some sites sit in a component no screen reaches, so the analysis computes the empty scope for them, which is the right answer: nothing in the source says that component is ever rendered. Some sit in a service or a guard, the two input relations Chapter 3 specifies and this version does not implement. The rest are scoped successfully and have nowhere to go, because the target is computed at run time or names an address the graph holds no node for. Only the second kind is work the analysis as specified would do and this implementation does not.

Table 5.10: The scopes against the rendered interface, on the 5 applications this harness can serve. *Judged* counts screens that rendered themselves rather than redirecting to a sign-in page; the rest cannot be judged from what rendered, because a redirected screen shows another screen's links. *Not predicted* is the only column that counts against the analysis; the other direction is reported in the text, because it can be judged only where the graph names a destination exactly.

Application	Screens	Judged	Pairs rendered	Predicted by the scope	Not predicted	Raw anchors
realworld	10	7	25	25	0	59
alfresco	26	3	0	0	0	0
k8s dashboard	67	1	0	0	0	0
bitwarden	98	18	8	4	4	8
mifos	605	1	0	0	0	0
All	806	30	33	29	4	67

5.3.1 Whether the scopes are right

Everything above measures what attribution recovers. Whether the *set of screens* it computes for a site is the set that site fires from is a different question, and the one the contribution turns on. The runtime method of Section 4.3 answers one direction of it: navigate to each screen the graph holds, let it render, read the in-app links the page carries, and compare them with the edges the graph's per-screen query yields there. Table 5.10 reports it.

A scope claim has two ways to be wrong, and they are not equally testable. It can be too small, so that the application renders a link the graph does not attribute to that screen; this the rendered interface decides. It can be too large, so that the graph attributes a site to a screen the application never fires it from; this the rendered interface decides only where the graph claims a destination exactly. The two are reported separately below, and the second is reported with its denominator, because that denominator turns out to be what limits the method.

In the first direction, of the 33 (screen, target pattern) pairs the running applications render on the screens that could be judged, 29 are predicted by the scope the analysis computed — 87.9 % — behind which stand 67 raw anchors. On realworld, which renders most of its screens without a backend, every rendered pair on every judged screen is predicted; the pairs that are not predicted are all bitwarden's. That is evidence that the computed scopes are not too small on what could be observed, and it is worth being plain about its size: 30 screens of 806, because 776 redirect to a sign-in page when there is no backend behind them, and 5 of the six applications are measured at all. ghostfolio is the one left out: it builds a separate bundle per locale, each declaring a base path of its own, and the harness serves a single directory at the server root, so its screens cannot be addressed the way the other five are. The oracle does not scale to this corpus; it settles one direction of a question, on part of it, that nothing else here settles at all.

The 4 links it does not predict are the informative part, and they are one defect

seen four times. All four are in bitwarden: its `/login` screen renders links to `/hint` and `/signup`, and two further screens render a link to `/signup`, none of which the graph has leaving those screens. The graph does hold those edges — with the right witness, `libs/auth/src/angular/login/login.component.html` — but anchored at an origin node rather than at a screen, because the component that renders them lives in a workspace library outside the application directory and attribution computed the empty scope for it. So the failure is not a scope that names the wrong screens; it is a scope the analysis declined to compute, which the running application then shows to be non-empty. Those sites are the *unplaced* class of Table 5.17, and this is the first measurement that any of them has a screen.

The other direction is the one an earlier draft of this section reported as a single figure, and it does not support one. 80 predictions run that way: the graph holds the edge and the page showed no link. Three causes are mixed in that count, and two of them are not defects. The first is interface state: realworld's header is wrapped in `@if (authState === 'authenticated')` and offers *New Article*, *Settings* and the profile link only to a signed-in user, and this harness signs in to nothing, so the graph is right and the probe is blind. The second is data: a tag page navigated to with a placeholder segment lists no articles, so it renders none of the article links the graph correctly attributes to it. The third is target over-approximation, which is a property of the destination rather than of the scope. realworld's `[routerLink]="['/profile', article.author.username]"` resolves to `/profile/:username` and to `/profile/:username/favorites`, because a two-segment link with a hole admits the deeper route; the edge is recorded as a may edge at half confidence, which is the graph stating that it does not claim the address.

Only the predictions that name a destination exactly can be refuted by a page not linking there, so those are the ones the oracle judges in this direction. There are 7 of them across the judged screens, against 102 over-approximated, and 0 of the 7 were not rendered. A denominator of 7 supports no rate, and reporting one would be the same error as the negative percentage of Section 5.5. The honest result is therefore narrower than the first direction's: the over-attribution direction was not refuted on this corpus, and the reason is that the graph almost never claims an exact destination at a screen this oracle can observe. Separating the two directions is the whole reason the measure is reported as several numbers rather than as a precision figure.

5.3.2 What the attribution discriminates

The oracle above cannot say whether the scopes are too large, so the question is worth asking in a form that does not need a running application: how much narrower is the computed attribution than the widest attribution there is? Assigning every navigation site to every screen recovers every construct by construction, needs no analysis, and is useless — the per-screen query would return the whole site list on every screen. The ratio between the two is a measure of what the analysis buys, and Table 5.11 reports it.

The analysis is between 1.7 and 18.5 times narrower than that baseline, and the

Table 5.11: The computed attribution against assigning every site to every screen. A site is a source construct a witness cites; an edge anchored at a scope is counted over the screens that scope stands for, since counting it at its anchor would understate the analysis's breadth. *Mean scope* is the attributed pairs per site.

Application	Screens	Sites	Attributed pairs	Mean scope	All-screens pairs
realworld	10	39	192	4.92	390
alfresco	26	19	93	4.89	494
ghostfolio	84	177	4087	23.09	14868
k8sdash	67	62	2451	39.53	4154
bitwarden	98	106	2110	19.91	10388
mifos	605	1309	42874	32.75	791945

low end of that range is the figure that qualifies RQ3. On k8sdash the average site is attributed to 39.5 of 67 screens, which is 59 % of the application: the per-screen query there excludes about two screens in five and admits the rest. The widest margin is mifos, where 42874 attributions are computed where the baseline would assert 791945. Across the corpus the mean scope runs from 4.9 to 39.5 screens.

Two things follow, and the second is the more uncomfortable. The first is that the trivial baseline is not a competitor for the must tier: an unguarded site in a shared component attributed to every screen would yield a must edge from screens that never render it, so Claim 3.1 would fail by construction rather than be tested, and the result that attribution costs the deterministic tier nothing is only meaningful because the attribution is narrow. The second is that on this corpus it is not very narrow. A scope that names three fifths of an application is a weak statement about where a site fires, and the coverage RQ3 reports is bought with scopes of that width. Nothing in the evaluation shows those wide scopes to be wrong — the oracle above could not test the direction in which they would be wrong — but nothing shows them to be right either, and a reader should take the recovered share of Table 5.17 together with the widths in this table rather than on its own.

5.3.3 What each mechanism contributes

The width above says how far the attribution is from doing nothing. It does not say whether the mechanisms that produce it earn their place, and the answer is not the same for all of them. Table 5.12 extracts the corpus at 5 nested levels, each withholding every mechanism above it. The withholding covers the stand-ins of Section 3.3 as well as the implemented relations: a navigation inside a guard, attributed to the routes that name it, and an effect placed at the shell are approximations of the two relations the prototype does not implement, so a level below *full* does not carry them either. Without that, the lowest level would not be the ownership baseline it is read as — it credited direct ownership with sites that only the service and dispatch stand-ins place, and the service join's own contribution was correspondingly understated.

Table 5.12: The corpus extracted at each attribution level. *Sites* counts the source constructs the level places on at least one screen, *pairs* the (site, screen) attributions it asserts. The levels are nested, and the harness refuses to write this table unless each one's pairs are a subset of the next one's.

		sites / (site, screen) pairs				
Application	Screens	owned	nesting	rooted	outlet	full
realworld	10	17 / 26	25 / 48	38 / 178	38 / 182	39 / 192
alfresco	26	11 / 33	14 / 37	14 / 37	14 / 37	19 / 93
ghostfolio	84	111 / 121	129 / 155	170 / 3599	170 / 3695	177 / 4087
k8sdash	67	11 / 12	59 / 275	59 / 275	59 / 2250	62 / 2451
bitwarden	98	66 / 70	84 / 262	98 / 1634	98 / 1690	106 / 2110
mifos	605	1081 / 1432	1244 / 1760	1304 / 38060	1304 / 41563	1309 / 42874
All	890	1297 / 1694	1555 / 2537	1683 / 43783	1683 / 49417	1712 / 51807

The levels are not evenly spaced, and the step that matters is not the one this thesis adds. Direct ownership places 1297 sites, 75.8 % of what the full analysis places, and containment raises that only to 1555. The shell rule is what changes the picture: *rooted* places 1683 sites, 98.3 % of the full figure, and carries the pair count from 2537 to 43783. Everything this thesis adds on top of that — outlet descent and the injected-service join — raises the site count from 1683 to 1712: outlet descent adds 0 sites and the service join 29, 1.7 % of the corpus total.

That ordering matters for the comparison with earlier work, because the shell rule is not a mechanism this thesis introduced. Oshima and Kishi assemble their page information from the root component as well as from the components beneath it (Section 2.4), so *rooted*, and not *nesting*, is the level that stands for what they reach. A comparison drawn against containment alone would be a comparison with a method nobody proposed.

Outlet descent is the one mechanism whose contribution is width without coverage at all: it places 1683 sites against rooted's 1683, the same count on 6 of the six applications and 0 new sites over the corpus, while raising the pair count from 43783 to 49417. Whether that width is correct is what a table of counts cannot say, which is the next subsection's subject.

5.3.4 Whether the scopes are the right ones

For realworld the screens each navigation site really fires from were read off the sources by hand (Section 4.3): 39 sites and 188 (site, screen) pairs. Scoring every level against that gives the comparison no other method here can make, because it has both directions of the truth rather than one; Table 5.13 reports it.

Every level below the last is exactly precise: none of them attributes a single pair the application does not have. What separates them is how much they find. Direct ownership recovers 13.8 % and containment 25.5 %, both far short. Adding the shell rule — the level that stands for the prior work's reach — recovers 94.7 % at 100.0 % precision, leaving 10 pairs unfound and inventing none.

Table 5.13: Each attribution level against the hand-built ground truth for realworld. *Missing* is a pair the application has and the level does not; *excess* is a pair the level has and the application does not.

Level	Correct	Missing	Excess	Precision	Recall
owned	26	162	0	100.0 %	13.8 %
nesting	48	140	0	100.0 %	25.5 %
rooted	178	10	0	100.0 %	94.7 %
outlet	182	6	0	100.0 %	96.8 %
full	183	5	9	95.3 %	97.3 %

The honest reading of the last two rows is therefore not the one an author would prefer. Against *rooted*, everything this thesis adds buys 10 missing pairs reduced to 5 — five more correct attributions — and introduces 9 wrong ones, taking precision from 100.0 % to 95.3 %. On this application the trade is negative: the additional mechanisms cost more in precision than they return in recall, and a reader who wanted the most accurate attribution of the five would choose *outlet*, which recovers 96.8 % with no excess at all.

Both error sets reduce to a single cause, which is the useful part of the result. All 9 excess pairs come from one site: the `navigate` inside `UserService.logout`. The service join attributes a navigating service to every screen whose components inject it. Ten components inject this one, the header among them, and the shell renders the header on every screen, so the site is attributed to every screen the application has; its only caller is a button on the settings screen. The analysis already treats that join as an over-approximation and caps edges from it at may (Section 3.2), so the model does not claim these ten transitions are certain — but the scope is nine screens too wide, and this is the first measurement in the thesis that shows a computed scope to be too large rather than merely unverified. All 5 missing pairs are the same screen, `/profile/:username`: its component is placed by a child route whose path is empty, so the child's address collapses onto its parent's, and the components that child renders are not attributed to the collapsed address. One cause each, and both are reportable as defects rather than as a rate.

Two things follow for RQ3. The first is that most of the recovery attributed to this analysis is produced by a mechanism earlier work already had: 94.7 % of the 188 pairs are reached by the shell rule, and the mechanisms added here take that to 97.3 % while introducing the only wrong attributions any level makes. The second is that this is one application of six, the smallest, and the corpus-wide widths of Table 5.11 are not licensed by it — on k8sdash the mean scope is 59 % of the application, and no ground truth exists to say whether that width is earned. What the ground truth establishes is narrower than soundness, since it found errors in both directions: the additional mechanisms raise attribution recall on this annotated application, at a measured cost in precision, and the precision they cost is spent entirely on one known over-approximation. What it cannot establish is that the same holds on an application of six hundred screens.

Scope attribution therefore raises coverage without lowering must-tier precision,

which is what RQ3 asks. Three qualifications belong with that answer, and all three are visible in the tables rather than hidden by them. The first is that the gain is overwhelmingly on the may tier, so what attribution mostly adds is navigation the graph says is possible, not navigation it says is certain. The second is that the scopes are tested in both directions on one application only. Corpus-wide, the oracle above can refute a scope that is too small, and did so 4 times; it cannot refute one that is too large, because at the screens it can observe the graph almost never claims a destination exactly, and because a link a template renders conditionally is absent for reasons that have nothing to do with the scope. The ground truth of Section 5.3.4 does test both directions: against the 188 pairs it records, the analysis asserts 9 that are not there, all at 1 of the 39 sites, and misses 5, one each at 5 further sites — but on realworld, the smallest application of the six. The third is the width reported in Section 5.3.2: the computed scopes are narrower than the trivial attribution by a factor between 1.7 and 18.5, and at the low end of that range a scope names most of the application. A site attributed to too many screens produces edges whose witnesses all pass, because the construct really is at that location and really does name that target, so no witness-based method can find it. What this section establishes is that attribution recovers a large part of a loss class no other analysis here addresses, that it adds no deterministic transition the evidence does not support, and that where the rendered interface could judge it, it was not found to be too small. That the scopes are not too large is not established, and Section 6.2 states it as the sharpest limitation of the work.

The same mutants were also run against the baseline graph, which answers a question RQ3 leaves open: whether attribution changes how sensitive the graph is to a source change. It does, in two ways that should be kept apart. The first is the one that was expected. Many mutants cannot be scored against the baseline graph at all, because the construct they change produces no baseline edge: 17 are excluded there against 6 on the attributed graph, and the clearest case is the link-deletion operator on realworld, where every candidate sits in the application shell and none of them produces a baseline edge. Attribution widens the part of the source the graph responds to at all.

The second was not expected, and it needs a comparison the two rates above cannot make. Of the mutants each graph can score, the attributed graph detects 59 of 64 — 92.2 % — against 42 of 53 on the baseline, 79.2 %. Those two rates are taken over different mutant sets, so the difference between them mixes a detection effect with the eligibility effect of the paragraph above, and the gap it shows is larger than the detection effect alone. The comparison that isolates the detection effect is the paired one: of the 49 mutants both graphs can score, identified by operator, file, line and subject, the attributed graph detects 44 — 89.8 % — and the baseline 40, 81.6 %. The two graphs disagree on 6 of those mutants and 0 of the disagreements go against attribution, so the effect is consistent in direction as well as positive in aggregate; four of the six are a change the attributed graph detected and the baseline did not respond to at all, and two are a change the attributed graph responded to with the wrong delta while the baseline did not respond. Outside the paired set, 11 mutants are scorable only against the attributed graph and 0 only against the baseline. A further 4 constructs are mutated in both runs but into different things, because the

retargeting operator picks its new destination at random; those are two different mutants rather than evidence about either graph, and they are counted apart rather than as an eligibility difference. So attribution does raise the detection rate per scored change, 89.8 % against 81.6 % on the paired set where the unpaired rates are 92.2 % and 79.2 %, and most of its effect on this corpus is the widening of what can be scored at all. An earlier measurement of this corpus reported the opposite, that attribution widened the graph's reach without making it more sensitive per construct; that conclusion was an artefact of two defects in the apparatus rather than a property of the analysis. One was in the extractor, which did not read a guard carried by a route a wrapper function returns, so guard mutants on the applications that use that construct could not be detected. The other was in the mutation harness itself, whose retargeting operator required the graph to *add* an edge to the new destination: attribution fans a navigation site over every screen it can fire from, so retargeting such a site to a destination those screens already reach removes the old edges and adds none, and a correct response was scored as a wrong one. Both are repaired. Which operator moved furthest cannot be said, since no per-operator mutation result from the earlier instrument survives to compare against.

5.4 Change sensitivity (RQ4)

Mutation testing requires the application to be extracted again once per mutant, so this part of the evaluation was run on three of the six applications: realworld and alfresco, which carry the earlier mutation figures, and bitwarden, which has the highest guard density in the corpus. Every figure in this section comes from the attributed graph with harness 1.5.0, a fixed seed and a quota of eight mutants per operator. The corrections made to the mutation harness are described in Section 4.3.2.

Table 5.14 shows how the sample was drawn. Over the three applications the harness found 249 candidate mutations, sampled 70 of them under the quota and scored 64. 6 were excluded: for 5 of them no baseline edge enters any screen the guarded route yields, and 1 guards a route that declares neither a component nor children, so it yields no screen for a guard to be recorded on. An excluded mutant carries no information about sensitivity: it either repeats a coverage gap that RQ1 has already counted or acts on a route that declares no screen for RQ1 to have missed. The exclusions are few here and were not always: of the 70 mutants sampled against the graph produced without attribution, 17 are excluded and 53 remain, which is the same coverage gap seen from the mutation side. Where the quota capped an operator, the candidates left unsampled are reported rather than passed over.

Table 5.15 gives the detection rate per operator, and Figure 5.4 shows the same outcomes summed over the applications. Renaming a route path was detected in all 22 scored mutants of the three applications. Deleting a `routerLink` was detected in all six scored mutants of realworld, and over the corpus 4 of these mutants moved the witness set rather than the edge set, because a second identical link in the same template still produces the edge. That is the behaviour the graph should have, and it is the reason detection is judged on witnesses as well as edges. The operator found no candidates in alfresco, which binds `[routerLink]` instead of writing a literal

Table 5.14: Mutation sample. Candidates found, mutants sampled under the per-operator quota, and mutants excluded as confounded with a coverage gap.

Application	Candidates	Sampled	Excluded
realworld	22	22	0
alfresco	25	16	1
bitwarden	202	32	5

Table 5.15: Detection rate per mutation operator on the attributed graph, as detected over scored mutants. A dash means the operator found no candidate in that application.

Operator	realworld	alfresco	bitwarden
Rename a route path	6/6	8/8	8/8
Delete a `routerLink`	6/6	–	8/8
Retarget a `navigate`	3/5	4/4	5/8
Remove a guard	5/5	3/3	3/3
All operators	20/22	15/15	24/27
Detection rate	90.9%	100.0%	88.9%

attribute. Against the graph without attribution the same sample yields only 4 scored mutants, of which 4 are detected: every candidate in realworld is excluded, all of them links in the application shell, which produces no baseline edge, and the ones that can be scored at all are bitwarden's.

Retargeting a `navigate` call is the weakest operator and the one whose failures are most informative. 4 of its 17 mutants moved the graph but not as predicted, and their deltas show two mechanisms rather than one. In 3 of them the mutant removes the edges to the old target, as predicted, and adds none, because the retargeted commands array composes an address the application declares no route for, so there is no node for a new edge to reach. In the rest the composed address resolves to the application root, so an edge does arrive, at the wrong screen. A third case is excluded in advance: where the new target is an address the site's own screens already reach, a correct retarget adds no edge and would be called wrong for it, and the harness removes such a mutant where it can tell (Section 4.3.2). Where it cannot, the outcome is recorded as a change the graph made but not the predicted one, rather than counted as a detection. The 1 that moved the graph not at all is a call in a component the analysis could not place under any screen, so the only edge it draws joins two nodes that are not screens, and retargeting it leaves that edge as it was.

The rename operator needs a caveat before these figures are read as change sensitivity. A rename mutant is excluded unless the baseline graph already holds a node for the path segment it renames, and it counts as detected when the renamed segment appears in the graph. A screen is identified by its full path (Section 3.1), so a literal path the extractor has already parsed must yield a different node once renamed, and detection for this operator is close to guaranteed by construction. It supplies 22 of the 64 scored mutants and 22 of the 59 detections. What it tests is

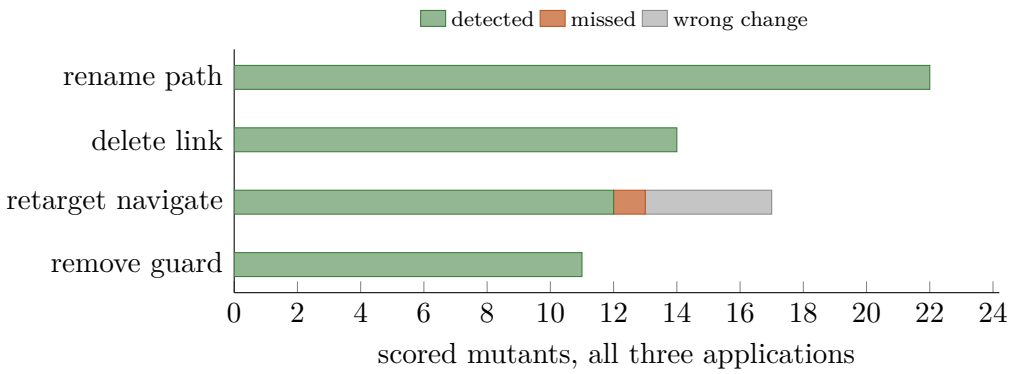


Figure 5.4: Mutation outcomes by operator, summed over realworld, alfresco and bitwarden, on the attributed graph. Excluded mutants are not shown; 6 of the 70 sampled were excluded here against 17 of 70 on the graph without attribution.

node extraction rather than the graph's response to a change in behaviour. The three operators that can fail are detected in 37 of their 42 scored mutants: 14 of 14 deleted `routerLink` bindings, 12 of 17 retargeted `navigate` calls, and 11 of 11 removed guards.

Every guard removal the run can score is detected: 11 of 11, on all three applications, each judged on the edges entering the screens its guarded route yields. Guards are what the corrections of Section 5.5 were about, although no per-operator figure from the earlier instrument survives to put a number on the movement. It is also the operator whose exclusions are the most informative, because a guard is recorded on the edges that enter the guarded screen, so removing it can be observed only where the graph both holds that screen and enters it. All 6 exclusions are that condition failing, in two ways: for 5 of them the graph holds the screen and no edge enters it, and 1 guards a route that declares no component and no populated children, so it yields no screen at all. Among the guards that are scored, the empty path makes no difference — 4 of the 4 scored guards on a route whose own path is the empty string are detected, the empty-path child of realworld's `editor` route among them, whose entering edge carries `requireAuth` on this instrument as the edge entering `/editor/:slug` does. What the operator cannot see is a guard whose removal leaves both the edge set and the guard text identical, and on this corpus there is no such case left once the unobservable guards are excluded.

The mutation run therefore does not confirm the defect class *guards unreliable in both directions* of Section 5.2 on this instrument, and it does not contradict it either: every guard it could observe behaved as the model requires, and the 6 it could not observe carry no information about guard representation. The evidence for that class is what Section 5.5 records at commit f17a302: a guard carried by a route a wrapper function returns, and a `canActivate` element written as a call rather than as a name, neither read by the extractor as it stood then and both read now.

1 mutant produced no change in the graph at all, and it is the retargeted `navigate` call described above rather than a guard.

The 5 failures are all retargeted `navigate` calls, and they divide by application as follows. 2 are in realworld, 3 in bitwarden and 0 in alfresco. The three applications

do not declare their routes in the same way: realworld and alfresco export route arrays, while bitwarden declares its routes inside NgModule routing modules through `RouterModule.forRoot` and `forChild`. No operator fails under one style and not the other, so nothing in this experiment distinguishes them.

Of the 64 scored mutants, 59 were detected. The graph responds to changes in the constructs it represents. Where it does not respond at all, the construct is not represented: all 6 excluded mutants are guards the graph can record on no edge, and the 1 silent retarget is a `navigate` call in a component the analysis could not place under any screen.

5.5 What the repairs cost the claim (RQ5)

The defect classes of Section 5.2 are a diagnosis, and a diagnosis is worth what the repair is worth. This section reports what happened when the list was treated as a worklist: every class was taken to its root cause in the source of the application it appeared in, and each cause that turned out to be the extractor's was fixed. The question asked of each one was the same, and it is the question the method exists to make askable — is the navigation unreadable, or was it merely unread?

Two things must be said about the figures before they are read. They are the same figures the rest of this chapter reports: when the repairs changed what the extractor recovers, the whole evaluation was re-run on the repaired commit rather than reported beside the earlier one, so Table 5.1 and everything after it describe the instrument this section arrives at. What the earlier instrument measured is quoted here, where the comparison is the point, and the provenance line of each generated table names the commit it came from. And where the oracle shared a blind spot with the extractor it too was corrected. Those corrections are versioned in the harness manifest, which records what each round changed and why. Every after figure in this section was produced by rerunning the whole measurement chain at version 1.8.0. The before figures were not: they were measured by the oracle as it stood when the round began, and reproducing them under the current one would mean rebuilding the extractor at its pre-round commit, which is not done here. Where the two oracles disagree about how many screens an application declares, the declared column of Table 5.16 prints both numbers, because a ratio whose denominator moved between two columns is two measurements and not a difference. Several of the oracle's corrections matter enough to name, because each one had been scoring the extractor against paths the oracle itself had failed to read: a route path written through a constant, an enum or Angular's `$localize`; a first-party import resolved through the workspace's `baseUrl`; and a route array named rather than written out. Before the last of these the oracle saw 2 declared screens in k8s dashboard where there are 67, and scored the extractor's 67 nodes as 65 unmatched. Three more were found in the round reported in Section 5.6 and belong in the same list, all of them in the denominator rather than in the extractor: the oracle had been reading Storybook fixture route arrays as declared screens; it had been reading the route tables of a sibling application reached through a tsconfig alias as this application's; and it had been recording a path held in a route table wrapped in `Object.freeze`

as an unresolvable expression, which is the correction that matters most, because the alternative considered first was to drop those routes from the denominator as unreadable. They were readable one call away, and a denominator that shrinks is a coverage figure that rises for no reason the extractor earned.

5.5.1 What the losses were

Every class but one resolved to a construct the extractor could read and did not. The exception is ghostfolio's custom `UrlMatcher`, which computes a route's path in a function and which no reader of a route table can resolve; it is the one place in the corpus where an application expresses a route in a way static analysis cannot follow, and both tools report it as a blind spot rather than as a route. The causes fall into three groups.

The route table was not reached. An NgModule loaded by `loadChildren` keeps its routes in a separate `*-routing.module` that it imports, so stopping at the module file found nothing and the routing module was then scanned at the project root, where every screen in it was minted at its own relative path. A route array held inline by `RouterModule.forChild([...])` has no variable to find it by, and its elements may name routes (`[ERROR_ROUTE]`) rather than write them. A loader may reference its module directly (`loadChildren: () => VaultModule`) instead of importing it dynamically, and a barrel may re-export the route array rather than import it. A wrapper such as mifos's `Route.withShell([...])` is a call, not an object, and the array it is given was skipped whole.

The path was named, not written. `path: internalRoutes.account.path` is a compile-time string, and so is an enum member and a `$localize` segment with its metadata block. Following the name needs the workspace's `paths` aliases, since the table commonly lives in a library outside the application directory, and it needs the destructuring a route file reaches it through.

The destination was named, not written. A target may be a field, a dotted chain into the route table, an element of a commands array, the return of a builder, or a value in a lookup the component fills. Resolving these is what separates a link from a dead end, with one qualification that cost a soundness violation before it was added: a field seeded with a literal is mutable state, not a constant, and following it turns a run-time value into a must edge.

Table 5.17 gives the construct accounting, and it is reported in four parts rather than as one ratio, because a single number cannot separate three different things. A site is *recovered* when it becomes a transition with a destination. It is *dynamic* when the destination is one only the run time knows — a value from the backend, a history entry — in which case the graph records the transition as an edge into that screen's `u_` sink, with modality unknown, rather than dropping it or guessing. It is *unplaced* when the destination is readable but the screen it fires from is not, in which case the edge is anchored at an `o_` origin node that says so. What is left is unexplained. 43 sites leave the denominator entirely, on three grounds, none of which is a transition between screens: 35 pass an empty commands array and so change the query of the route they are already on, 7 navigate a secondary outlet, which the model admits

Table 5.16: Declared screens that have a node, before and after the loss list was worked. A blind spot is a route the oracle knows is there and cannot address: a lazy boundary whose route array it could not find, a path expression it could not resolve to a literal, a route whose path is computed by a custom matcher, or a route source spread into a table from a call the parser does not follow, which is the kind that now accounts for most of the column.

Application	Before	After	Declared	Blind spots
realworld	100.0 % (10/10)	100.0 % (10/10)	10	0
alfresco	100.0 % (26/26)	100.0 % (26/26)	26	10
ghostfolio	100.0 % (84/84)	100.0 % (84/84)	84	2
k8s dashboard	100.0 % (67/67)	100.0 % (67/67)	67	0
bitwarden	100.0 % (98/98)	100.0 % (98/98)	98	1
mifos	100.0 % (605/605)	100.0 % (605/605)	605	1

no screens for, and 1 names no destination at all. All three are decided from the construct's own text before the graph is consulted, so the set is the same in both runs; the generator refuses to write these figures if the grounds do not sum to the total. Both runs are measured by the same ledger with the same exclusions, so the two columns of Table 5.6 are ratios over the same 1777 sites. That was not so for most of this work. The grounds were tested after the graph had been consulted, so a site attribution gave an edge to escaped the ground its own text had put it in, and the after column was a ratio over more sites than the before column — the thing Appendix A.2 says a coverage figure should never be allowed to do. The comparison now refuses to print at all if any construct changes its ground between the two runs.

The restriction is enforced on the route side as well. A route that declares a named `outlet` is reached as `(name:path)` and never at the primary address, so it contributes no screen; before that was enforced it could take the primary address from the sibling that really renders there, by being declared first, and the graph named the wrong component at a real address without saying so. bitwarden declares such routes — a login screen and a registration screen each pair a primary component with a second one on a named outlet at the same empty path — so the repair is not hypothetical, though it moves no count there because the primary sibling already held the address. The restriction reaches a named outlet's *subtree* as well, which it did not until the runtime check of Section A.5 showed what the omission cost. alfresco mounts its viewer as `{ outlet: 'viewer', children: [...] }`, and the routes beneath it were minted at the primary address, `/view/:nodeId` and `/search-libraries/view/:nodeId`, which Angular reaches only as `(viewer:...)`: both tools read the subtree the same way, so the coverage figure could not expose it, and a navigation to either address in the built application is answered by the catch-all. An outlet is inherited, so nothing below such a route has a primary address either, and neither tool mints one now.

Of 1777 in-scope sites, 78.3 % are recovered, 14.5 % are accounted as dynamic and 5.6 % as unplaced, so 98.5 % are accounted for in all. The comparable figure before the list was worked is 71.9 %. The reading that changes most is k8s dashboard, which recovers a sixth of its sites and looks like a failure until the second column is

Table 5.17: Construct accounting after the loss list was worked. Percentages are of the in-scope sites.

Application	Sites	Excl.	In scope	Recovered	Dynamic	Unplaced
realworld	40	1	39	100.0 %	0.0 %	0.0 %
alfresco	34	7	27	25.9 %	25.9 %	44.4 %
ghostfolio	198	12	186	43.5 %	41.4 %	14.0 %
k8s dashboard	72	4	68	16.2 %	72.1 %	8.8 %
bitwarden	132	19	113	60.2 %	13.3 %	19.5 %
mifos	1344	0	1344	88.2 %	8.2 %	2.5 %
All	1820	43	1777	78.3 %	14.5 %	5.6 %

Table 5.18: Must-tier soundness and must conversion after the loss list was worked, before the fourth correction of this section, which demotes every edge in the tier. "Not applicable" means the application emits no must edge, so the property cannot be tested on it.

Application	Edges	Sites cited	Judged	Clean of judged	Must clean	Must conversion
realworld	55	81	51	90.2 %	9/9	30.0 %
alfresco	56	80	40	67.5 %	n/a	0.0 %
ghostfolio	402	682	202	93.6 %	n/a	0.0 %
k8s dashboard	181	314	65	96.9 %	n/a	0.0 %
bitwarden	271	516	256	66.8 %	10/10	10.6 %
mifos	10636	14079	1243	87.9 %	1/1	0.1 %
All	11601	15752	1857	85.6 %	20/20	1.5 %

read: nearly three quarters of its navigation computes the destination at run time, and two of its sites are unexplained. The dynamic sites are not one central builder — they are spread over 43 files, 38 of them contributing a single site — so what the column reports is a habit of the codebase rather than one place to fix.

Two cautions belong with the corpus total. mifos supplies 75.6 % of the in-scope sites on its own, so the corpus figures are close to mifos's: without it, recovered is 47.6 % and accounted 97.0 %. And the before column of Table 5.16 is measured against a denominator that itself moved, because the oracle had been unable to read some of the route tables it was scoring against; the declared column states both numbers wherever they differ.

5.5.2 What it cost the soundness property

A coverage gain that quietly loosened the must tier would not be a gain, so the witness check of Section 4.3 was run again on all six applications. Table 5.18 reports it as the round left it, beside the conversion ratio RQ1 is defined on. A fourth correction, made after the table was measured, empties the tier, and is reported after the first three.

Of the 20 must edges the round left in the corpus, 20 pass the witness check and

0 violate the property. The tier was small — 20 edges in a graph of 11601 — and an earlier state of this extractor, commit f17a302, published one 51 times larger: 1024 edges, of which 998 passed the check and 26 violated it. Those figures are read from that commit's own generated results rather than re-measured, since the extractor has moved and running it now would measure a different tool. The difference is three corrections, and they are worth separating because each one was hidden by the one before.

The first is a guard the walk never reached. One application routes every feature table through a wrapper function that returns a route carrying an authentication guard, and the guard set of a screen was assembled from the route chain the walk descends; a route a function *returns* is not on that chain, so the guard went unread and everything below it was published as unconditional.

The second is smaller in the source and wider in effect. A `canActivate` element that is a *call* rather than a name was not recognised, and an unrecognised element was skipped, so a route guarded only by a guard factory read as a route with no guard at all. bitwarden guards its root with `redirectGuard()`, so the deterministic edges that point at that root read as unconditional. The rule that replaces it is the one that generalises beyond this corpus: an element the reader cannot name gates the edge anyway, because refusing to read a guard must never be the reason an edge is called deterministic.

The third was invisible until the check itself was corrected. The extractor files the second and later constructs that yield an identical edge as further witnesses of it, and the witness check opened only the first, so the tier was being judged on about two thirds of the evidence it rests on. Judging every cited site found four edges in bitwarden whose later citations targeted `/vault`, an address that application declares no route for: the literal matches nothing, the catch-all redirects to the root, the site is correctly held at may — and then merged into a must edge the root already had, inheriting its modality. An edge now takes the weakest modality over every construct that cites it, which is what an edge citing several constructs means. All four moved to the may tier, which is why the property holds over the figures in this table and did not over the figures of the round before it.

The fourth was not found by the witness check, because the witness check cannot find it. It compares the destination a cited construct names with the destination its edge names, and never asks whether the construct runs every time its code does — the half of Claim 3.1 that Section 3.1 assigns to the demotion rules. Those rules demoted a site for a guard on its target, a cap from attribution, a catch-all route or a target with holes, and for nothing else. A link under `*ngIf`, the case Section 3.1 names as demoted, was emitted as must, and so was a link inside an `@if` or `@empty` block, a call under a branch, a call in a callback that the result of an asynchronous call invokes, and a call after an `await` or an early `return`. Reading each of the 20 must edges the round left at every construct it cites shows that the missing rule was not a corner case: 16 have every cited construct running under such a condition and the other 4 have at least one, so under the weakest-modality reading of the third correction not one of them meets the claim, and all 3 applications that held a must edge lose every one. 8 of the edges cite a construct inside a callback an asynchronous

result invokes, 11 one after an `await`, 10 one under a branch and 4 one under a template condition, realworld's own `*ifAuthenticated` directive among them. The extractor now demotes a site under any of these, and with that the deterministic tier of the corpus is empty: 0 must edges with attribution and 0 without it, on all 6 applications.

The shape of the tier the round left is worth stating, because the fourth correction removes it. Not one of its edges passed a guard, and they arrived at a handful of addresses: the application root, the sign-in screen, the single sign-on screen, the sign-up screen and the screen that finishes a sign-up. Those are the screens a navigation reaches once something has happened — a request has returned, a sign-in has been checked — and that is exactly the condition the fourth correction reads. In an application that guards its interior there is no unconditional transition left to find. A reader who expected static extraction to recover a large deterministic graph should take that as the answer to the expectation rather than as a defect of the analysis.

The cost is paid in the measure RQ1 is defined on, and it is paid in full. Must conversion over the corpus read 1.5 % on the round's instrument, already below what it read before any of the corrections, because the earlier figure counted guarded transitions as deterministic ones and counted some of them on evidence it had not read. After the fourth it is zero: RQ1 defines it as the fraction of constructs witnessed by at least one must edge, and no edge is must. Each correction removed a claim the extractor could not support, and the fourth removes the last of them. Claim 3.1 now holds on this corpus because there is nothing for it to range over, which is not a soundness result in any useful sense; it says only that the extractor no longer asserts a deterministic transition it cannot support.

Read over the whole graph rather than the must tier, the figures are counted per cited source location and not per edge, because that is what the check opens: the 11601 edges of the corpus cite 15752 locations between them, an edge citing several wherever several constructs yield it. Of those locations only 10.1 % are clean, because 88.2 % of them are over-approximations for which the check claims no target agreement by design. That is reported beside the must column because the must tier was a small slice of the graph and is now an empty one, and a precision figure for a slice is not one for the graph. Nor is it a defect rate: on the 1857 locations the check does judge — every one that is not an over-approximation — 85.6 % are clean. The three figures answer three different questions. The first is the one that bears on Claim 3.1, and it bears on it in one direction: a must edge whose cited site named another destination would refute the claim, while the claim's quantification over inputs is carried by the demotion rules and not by this check (Section 3.1). Keeping the unit explicit is not pedantry here: dividing a count of locations by a count of edges is how an earlier draft of this paragraph published a negative percentage.

One caveat belongs with the 88.2 % figure, because "by design" reads as a property of the method and most of it is a property of one line. Of the 11601 edges in the corpus, 47.0 % — 5454 of them — come from a single call site in mifos, `view-transaction.component.ts:135`, which navigates to a template literal whose static prefix is empty:

```
this.router.navigateByUrl(`${accountUrl}/actions/${name}`)
```

Table 5.19: The route configuration the framework holds, against the extractor's node set. *Routes* counts the route entries the configuration holds once every lazy subtree is expanded, and *mounted* the addresses among them at which the router places a component on the primary outlet. *Not mounted* counts nodes the extractor declares at an address the framework mounts nothing at. *Not minted* counts addresses the framework mounts and the extractor has no node for, and *prefix only* those further addresses the framework's configuration holds where a component is placed but no screen of the address's own is: in 1 the route is a prefix with no empty-path child, and in 2 its empty-path child is a redirect, and in neither case is the extractor wrong to mint no screen there. The column is reported so that *mounted* less *nodes* is accounted for in full. *Incomplete* is the extractor's own statement, from its soundiness notes, that part of the route set was beyond it.

Application	Routes	Mounted	Nodes	Not mounted	Not minted	Prefix only	Matcher only	Declared incomplete
realworld	14	10	10	0	0	0	0	no
alfresco	123	30	27	0	3	0	0	yes
ghostfolio	377	326	84	0	242	0	1	yes
k8s dashboard	140	67	67	0	0	0	0	no
bitwarden	170	99	98	0	1	0	0	yes
mifos	935	614	606	0	5	3	0	yes
All	1759	1146	892	0	251	3	1	

With nothing before the first hole there is no prefix to narrow on, so the site over-approximates to every declared route in an application that declares six hundred of them. mifos supplies 91.7 % of the corpus's edges on its own, and that one line supplies half of those. The honest reading of the whole-graph figure is therefore not that the method over-approximates at this rate, but that an unbounded fan-out is cheap to emit and expensive to report, and that an edge count is the wrong unit for anything the thesis claims. It is also an argument for a prefix floor: a site whose static prefix is empty tells the analysis nothing, and the model would lose nothing by recording it as a dynamic sink instead of as six hundred may edges.

The second column is the more uncomfortable one. RQ1 defines conversion as the fraction of constructs witnessed by at least one *must* edge, and by that definition 3 of the six applications sat at zero after the round, because they emitted no must edge at all, and after the fourth correction all 6 do: every edge the corpus yields is a may or an unknown. The recovered column of Table 5.17 counts a site as recovered when any edge witnesses it, which is a weaker predicate than RQ1's. Both are reported because neither alone is honest: the weaker one measures whether the graph represents the navigation, the stricter one whether it commits to a destination, and the answer to the second is now nothing on every application.

5.5.3 What is minted at an address the application does not mount

Across the corpus the extractor declares 0 screens that the framework mounts nothing at. Over 6 applications, 1759 route entries and 892 nodes, every address the extractor

claims is an address the framework's own configuration mounts. This is external evidence for one half of the must-tier property — that no node is minted at an address the application does not mount — and it is evidence the two static readers could not produce, because an address both of them place at the wrong prefix is an address they agree on.

That evidence is bounded by what a census keyed on addresses can represent, and the bound should be stated rather than inferred from the table. An address is counted as mounted when the configuration names it as a literal pattern and places a component there on the primary outlet. 65 route entries in the corpus place a component and are counted in neither column, because they have no such pattern: 1 decides its address through a `UrlMatcher`, and 64 sit on a named outlet, where the address is `(name:path)` and not a path. Table 5.20 shows every route entry in the bucket it falls in, and the generator refuses to write either table unless the buckets sum to the route total and unless every exclusion that drops a component-bearing entry is named — so a future exclusion cannot quietly swallow a screen. The matcher case is the sharper of the two: a navigation to `/admin/users` in the running application is answered by that component, so the mounted column is a lower bound by at least one address, and how many addresses the matcher claims is not published here, because reading its body by hand is not a measurement. The outlet entries were then put to the running applications, because an exclusion that drops a component should be shown to drop something no address reaches rather than argued to. Navigating the primary address each of them sits under — `/personal-files` in alfresco, `/namespace`, `/event` and `/clusterrole` in k8s dashboard, `/login`, `/signup` and `/login-with-device` in bitwarden — activates the primary screen in every case and none of the outlet components. Addressing them directly in Angular's own compound form, `/personal-files(viewer:view/abc123)`, `/namespace(actionbar:)`, `/login(secondary:)` and `/login(environment-selector:)`, is not recognised by the router at all: each is answered by a redirect to the sign-in screen. These entries are therefore regions the application activates programmatically, through a navigation that names the outlet, and not addresses a user can reach; the alfresco viewer's are the ones Section A.6 already declares outside the node set, and the rest are outside it for the same reason. Those navigations are the construct the ledger excludes as addressing a secondary outlet, so the two exclusions are the same fact seen from the two ends.

Two further limits belong with the 0 figure, because it is the strongest claim in this chapter and should not be read as more than it is. The first is that "mounted" is a property of the configuration and not of what a user sees: some addresses the extractor mints hold a component that renders only application chrome, and the address's own screen is reached by a redirect or by an empty-path child. The probe measures two such addresses directly — in k8s dashboard the root redirects, and in bitwarden the root places chrome and no screen of its own — and the same shape elsewhere in the corpus is counted as a loss for one application and as agreement for another, decided by what the extractor happened to mint there. The second is that where two routes sit at one address and a `canMatch` guard chooses between them, no static reader can say which answers: bitwarden's `/vault` is such a pair, the census keeps the first-declared component and the running router activates the

Table 5.20: Every route entry of Table 5.19, in the one bucket it falls in. *One address* counts entries that a surviving entry at the same address already answers for. *Named outlet* and *Matcher* are the two exclusions that drop a component the application places — 64 and 1 entries, 65 in all — and the rest place no component at any address. The generator refuses to write this table or Table 5.19 unless the buckets sum to the route total and every exclusion that drops a component-bearing entry is named here.

Application	Routes	Mounted	One address	Redirect	Named outlet	Empty outlet	Matcher	No component
realworld	14	10	1	0	0	0	0	3
alfresco	123	30	3	2	66	0	0	22
ghostfolio	377	326	9	1	0	0	1	40
k8s dashboard	140	67	0	3	29	0	0	41
bitwarden	170	99	7	9	13	0	0	42
mifos	935	614	17	32	0	0	0	272
All	1759	1146	37	47	108	0	1	420

other. Neither limit moves a published number — the census counts addresses and both members of that pair are leaves — and both are reasons to read Table 5.19 as a statement about the route configuration rather than about the rendered interface.

It was not so when the measurement was first taken. The comparison then returned two addresses in alfresco, `/view/:nodeId` and `/search-libraries/view/:nodeId`, and they were a blind spot the two static readers held in common: both assembled the routes beneath a named outlet against the primary path, both held both addresses, node coverage was 100 % over a set that contained them, and no comparison between the two could expose it. Section A.6 had declared the construct as an open case, and declaring it is not the same as being sound over it: a consumer reading the graph finds a node at `/view/:nodeId`, and a navigation to that address in the built application is answered by the catch-all route. An outlet is inherited, so nothing beneath a named-outlet route has a primary address either; the extractor now carries the outlet down the walk and mints no screen for such a subtree, which is a loss and no longer a claim. The named-outlet limitation stands as a limitation on what the graph contains, and Table 5.19 is the measurement that moved it out of the other column.

The check also found one case nobody had declared. Against the route set as the static readers held it before this round — the independent parser's output, which is the one of the two whose per-application sets are committed — the same comparison returns 10 addresses in alfresco, bitwarden: the two in alfresco above, and eight more in bitwarden. Seven of those eight are the report screens and the eighth is a member screen. Both readers placed them at the application root — `/breach-report`, `/sponsored-families` — where the running router mounts the first at `/reports/breach-report` and the second three segments deeper, under `/organizations/:organizationId/members/`. The cause was the same in both readers and had been arrived at independently in each: a lazy route names a module through a barrel, the barrel re-exports a feature module, and the feature module imports the routing module that holds the table. Each reader followed one hop from

the module the route named, found no table, and left the file to the scan that reads unclaimed tables at the root. Neither could have caught the other, because both were wrong in the same place, and the node coverage both reported was 100 % against a denominator that carried the same eight wrong addresses. Both now follow the chain to the table, bounded at three hops and refusing at every hop a file the route itself sits in, a file another route loads, and a file whose every table is registered at the application root.

5.6 Dead links, found without running anything

A site whose target the application mounts nothing at is a dead link, and finding them is something the method gives away for free. The clearest case is mifos. A transactions tab links to a journal entry with

```
[routerLink]="['/', 'journal-entry',
'view', 'S' + transaction.id]"
```

and the application does declare that screen, at `/accounting/journal-entry/view/:id`, inside the accounting module. The link omits the parent prefix, so the URL it builds is one no route matches. mifos declares `{ path: '**', component: NotFoundComponent }`, so the link does not fail invisibly: it renders the not-found screen, which is the less obvious of the two defects. The same shape repeats across the application. Links to `/loans-accounts/\ldots` name a subtree the application declares only under an owner — `/clients/:clientId/` and `/groups/:groupId/` — and never at the root, and links to `/savings-accounts/\ldots` one declared only under `/centers/:centerId/`, `/clients/:clientId/` and `/groups/:groupId/`. Four calls name `/users/create`, `/system/scheduler-jobs` twice and `/system/global-configurations` where the application mounts `appusers`, `manage-jobs` and `configurations`, and three further calls of the same shape name two more addresses: `/organization/users/create`, from two different create-user components, and `/organization/data-tables/create`.

The list is not one defect class, and the split matters for what each part is worth. 18 of the candidates are an absolute link written against a path the application does not mount, usually the name the server uses rather than the one the router does; those are the application's. 5 come from a *relative* `routerLink` — `[routerLink]="'edit'"`, `[routerLink]="['../../transactions']"` — where the target depends on resolving the link against the screen it fires from, and getting that base wrong is this analysis's gap before it is the application's defect. 3 are neither, because the result files do not record enough of the construct to say which it is; they are counted and not classified, rather than assigned to the half that would flatter the finding. The last two groups are reported as candidates and weighted lower. Counted as places in the source rather than as targets the three groups are 18, 3 and 3, and the difference is one relative link in a shared template that resolves against three owning screens: one mistake, three candidates, one place to go and look.

A further 68 sites are not published at all, and the reason is a boundary rather than a reading. They sit outside the directory the measurement is scoped to, in ../../libs, ../browser of 1 application's repository, and their files enter the analysis only because that repository declares a `paths` alias for them. Most are the source of a *sibling front end* — a browser extension built from the same monorepo — whose own router declares the very addresses a census would have called dead. An accusation needs two things: that the application mounts nothing at the target, and that the link is reached in the application measured. For a file belonging to another front end the second is not merely unestablished but false, so the route set these sites would be judged against is the wrong one, and publishing them would report one application's valid links as another's defects. They are counted here and left out of the census. A test that never opens those tabs would not find them, and a crawler would find them only if it reached the screens that hold them; reading the route configuration finds them without running anything.

Chapter 6

Discussion

6.1 Key findings

Static extraction of a transition graph from Angular source fails in two different places, and the first of them turned out to be the tool's rather than the method's. Node extraction is complete on all six applications of the corpus against the readers of the route configuration (Table 5.2): every screen those readers find declared has a node, and the runtime method confirms that no node sits at an address the framework mounts nothing at. Completeness in that sense is bounded by what a route table can be read to declare, and the runtime method is also the method that bounds it: visiting the addresses the applications answer finds 251 with no node, 242 of them in ghostfolio alone, so 2 of the six are complete in the stronger sense of holding a node for every address the running application answers (Section A.5). Both readings are reported, because the weaker one is what the loss classification of this chapter is computed against and the stronger one is what a user of the graph would want. That was not so when this work began. Two defects of the extractor accounted for most of the corpus then — a route whose path is a constant reference, and a route table behind a lazy boundary it did not cross, each producing no node at all, so that every navigation site belonging to such a screen was lost together with every site pointing at it. Section 5.5 reports what repairing them took; on the instrument every figure in this thesis is measured on, that class of loss is empty.

What remains is lost at the edge, and it is the same everywhere: the navigation sites exist in the source, the screens they would connect exist in the graph, and the extractor cannot decide which screens a site belongs to. That is the loss class scope attribution addresses, and it is the largest in every application of the corpus (Table 5.4). The structural relation between the two levels survives the repair — attribution still cannot draw an edge into a screen that has no node, which is why the chapter reports the two levels separately — but the ranking between them is a fact about an extractor and not a limit of the approach, and should be read that way.

The two failures cap each other, and that is the structural result of the measurement. Attribution cannot draw an edge into a screen that has no node, so node extraction bounds what attribution can achieve. Node extraction cannot place a navigation site that lives outside the component its route renders, so attribution

bounds what better node extraction would yield. Neither level can be repaired into a usable graph on its own. An evaluation that reported only one of the two would have described a tool that works better than it does, which is why Chapter 5 reports node coverage beside the conversion ratio instead of the ratio alone.

The ranking of the defect classes used to depend on which unit the corpus is counted in, and it no longer does. Attribution is the largest class both per application and over the corpus total (Table 5.4); on the extractor this evaluation began with, node defects dominated the total because the largest application contributed most of the constructs and lost them at the node level. That the two views once disagreed is still worth recording, because it is the general hazard: one large application can dominate anything that is aggregated, so the per-application view says what a developer would hit on a given codebase and the corpus view says where engineering effort pays off across codebases. Reporting only the total would have hidden the attribution problem that most applications show, and reporting only the per-application ranking would have hidden the weight of the largest.

The answer to RQ3 has to be read against what the loss rules can and cannot delimit. Because a lost construct is assigned to the first class that applies (Table 4.2), a construct inside a shared component that only appears in screens without nodes is counted as an attribution loss, although attribution alone cannot recover it. The measurement does not show the converse: every one of the 285 conversions came out of a construct the rules had already assigned to an attribution class, and none out of a node class (Table 5.8). The misclassification therefore runs one way only on this instrument — the class can hold a construct attribution alone cannot recover, but nothing attribution recovered was classified elsewhere — so the class bounds what attribution can repair from above and does not measure it. On realworld, whose node extraction is complete, attribution recovered every one of its attribution losses, must tier and may tier together (Table 5.6), and Table 5.9 records no remaining loss there under any heading. The gap between the bound and what was recovered elsewhere is accounted for by Table 5.9, and three of its reasons are not attribution problems at all: the target screen has no node, the owning component is never reached from any screen, or the site sits in a service or a guard that this version does not analyse. No construct that the baseline converted was lost, so the coverage gain was not bought by widening the must tier, and after the fourth correction of Section 5.5 there is no must tier for it to widen: the tier is empty with attribution and without. On the instrument before that correction every must edge passed the witness check in both runs — 20/20 after attribution — so there was no violation for attribution either to have caused or to have inherited.

The part of the model that Chapter 3 specifies but does not implement has a measurable price. Navigation sites in services, guards, interceptors, resolvers and effects are counted separately, and in absolute terms they are a small class across the corpus, yet they are not spread evenly: in one application they are almost as large as the shared-component class, and in another they are the only attribution loss left after the implemented pass has run. The call graph with dependency injection is thus required for applications that navigate from services.

RQ4 gives a conditional answer, and the condition is RQ1. Renaming a route

path was detected in every scored mutant in all three applications that were mutated. Deleting a `routerLink` was detected in every scored mutant, and retargeting a `Router.navigate` call in 12 of its 17 (Table 5.15). Removing a guard was detected in every scored mutant of all three, which is the operator the earlier state of this extractor was weakest on. The 1 mutant that left the graph unchanged is a retargeted call in a component the analysis could not place under any screen, so the graph holds no edge for it to move (Section 5.4).

An earlier state of this extractor was read directly off the graph for this class: in realworld the edge entering `/editor` carried no guard although the route declares `canActivate`, while the edge entering `/editor/:slug` carried it, and the difference between the two was put down to the empty path. That reading was right about the graph it was taken from and wrong about the cause. On the instrument this thesis ships both edges carry `requireAuth`, and the empty path is not what separates a detected guard mutant from an unobservable one: what decides that is whether any edge enters a screen the guarded route yields, which is now the exclusion rule (Section 5.4). The class "guards unreliable in both directions" of Chapter 5 rests instead on what Section 5.5 measured, a guard carried by a route a wrapper function returns and a `canActivate` element written as a call; the mutation run neither confirms nor refutes it.

Detection is conditional on coverage in a second sense, which the exclusion rule makes visible — although far less of it than on the instrument this work began with. Against the attributed graph only 6 of the sampled mutants cannot be scored at all, all of them guards the graph can record on no edge (Table 5.14); against the baseline graph 17 cannot. The distance between those two counts is where RQ1's coverage shows up in this experiment: the constructs that attribution puts into the graph are largely the ones the baseline run had to exclude. Either count is a coverage result and not a sensitivity one. The defensible statement is therefore conditional: given that a construct is represented in the graph, a change to it is almost always visible in the graph, and the probability that it is represented at all is what RQ1 measures. For change impact analysis this is the right shape of claim, because an impact query is only ever asked about the part of the application that the model represents, and the graph states which part that is through its witnesses.

The three mutated applications do not declare their routes the same way, two as standalone arrays and one in NgModule routing modules, and no operator fails under one style and not the other (Section 5.4). That is the whole of the comparison the measurements support. The corpus was not stratified by routing style and the other three applications were not mutated, so nothing more general about the two styles follows from this thesis.

Two uses of the extracted graph are supported by what was measured. One is change impact analysis. Every edge carries the file and line of the construct that produced it, as an invariant of the model rather than as a convenience, so a set of changed lines can be mapped to the edges whose witnesses fall inside them and from there to the screens those edges leave and enter. This is the screen-level counterpart of what Chianti does with atomic changes, affected tests and methods [61], and it sits in the impact analysis tradition that Arnold and Bohner describe [4, 12, 43].

RQ4 is the evidence that the mapping reacts to real edits rather than only existing on paper: for the constructs the graph represents, an authored change in the source produces the predicted change in the graph.

The other is checking in continuous integration at no execution cost. The graph is recomputed from source on each commit, the extraction is deterministic and carries no state between runs (Section 4.3), and nothing has to be installed, served, authenticated against or crawled. Properties of the navigation structure can then be asserted on every commit in the same way a type check is: that a screen still has at least one inbound deterministic transition, that a screen that was reachable from the shell still is, that a route path a test depends on has not been renamed. A guard assertion is the one obvious member of that list the graph cannot yet carry, because a guard is recorded on the edges entering the guarded screen, so for a screen that no edge enters there is nothing for such an assertion to read (Section 5.4), and an assertion is worth less than nothing if it passes for the wrong reason. A dynamically built model cannot be used this way at the same cost, because it needs a running application, test data and an exploration budget, and it has to be rebuilt for each version [50, 51, 36].

Both uses stop at the same place, which is runtime dynamic routing. Where a navigation target is computed from a value, where the route table is assembled at startup from configuration rather than declared, and where a user interface state is an overlay that no route describes, the static graph is either silent or over-approximates into the may tier, which carries no soundness claim. The graph is a lower bound on the navigation an application can perform, and it has to be consumed as one. A query that must not miss a transition cannot be answered from it alone, and the graph's own witnesses and declared approximations are what tell a consumer which queries those are.

6.2 Limitations and threats to validity

The results are measurements of one tool, on one corpus, with five methods, performed by the person who wrote the tool. Each of those four choices limits what the figures support.

The scope is validated in both directions on one application only. Every other method in Chapter 4 checks a node, an edge or a witness; none of them can be asked whether the set of screens attribution computes for a site is the set it fires from. Two methods can. The hand-built ground truth answers it fully, but for one application of six (Section 5.3.4): there the analysis finds 97.3 % of the (site, screen) pairs that application really has, at 95.3 % precision, its 9 wrong pairs all come from the injected-service join and all sit at 1 of its 39 sites, and the level that stands for what earlier work reaches already recovers 94.7 % of the real pairs with nothing wrong at all. Across the whole corpus only the runtime method applies, and it answers half of the question (Section 5.3.1): of the 33 (screen, target pattern) pairs the applications render on the screens it could judge, 29 are predicted by the computed scope, and the 4 that are not turn out to be sites attribution declined to

place at all rather than sites it placed wrongly.

What remains unvalidated is the other half and the reach. A site attributed to too MANY screens produces edges whose witnesses all pass, because the construct really is at that location and really does name that target; the oracle cannot convict it, because a predicted link missing from the DOM is equally well a link the template renders only to a signed-in user. The count of predictions it could in principle convict — those naming a destination exactly, rather than over-approximating to every address a static prefix admits — is 7 across the whole corpus, against 102 that over-approximate, so the direction is not merely unrefuted but close to untestable by this method. And the oracle judged 30 screens of 806: without a backend, 776 of them redirect to a sign-in page and render another screen's links. Driving the applications far enough to render their interiors — seeding a backend, signing in, and visiting a guarded screen in a known state — is what would lift both limits, and it is the single piece of future work that would most change what this thesis can claim about its own contribution. The shell rule is capped at *may* where the mounting route is invisible (Section 3.3), which limits what an over-large scope can claim, but that is a design precaution and not a measurement. What can be measured without a running application is the width of the scopes rather than their truth, and Section 5.3.2 measures it: the computed attribution is narrower than assigning every site to every screen by a factor between 1.7 and 18.5, and on k8sdash the average site is attributed to 59 % of the screens. A scope that wide is a weak statement about where a site fires even if it is sound, and the coverage attribution recovers is bought at that width.

Construct validity. The conversion ratio divides the constructs witnessed by a deterministic edge by all navigation constructs that the independent parser finds in non-test source. That denominator over-counts in two ways that both push the ratio down. It contains constructs that no transition graph could convert, in particular calls that only change the query string of the current screen, which Chapter 5 reports on a separate row rather than as a loss. It also contains constructs in code that the application never mounts, such as components whose selector no template uses, which the inspection of the remaining losses identified. Every reported conversion ratio is therefore a lower bound on the fraction of reachable navigation that the extractor recovers, and the true figure cannot be computed without deciding reachability for each construct by hand.

The denominator also under-counts, and this threat is the more fundamental of the two because it bounds what the measurement can see at all. The parser recognises navigation by four syntactic patterns: a `routerLink` attribute or binding, and a call to `navigate` or `navigateByUrl` on a receiver whose name contains *router*. Navigation expressed any other way is in neither the numerator nor the denominator, so it is not a loss and not a success; it is absent. An application that wraps navigation in a helper, so that its components call `this.nav.goHome()`, contributes one construct at the wrapped call site and none at the places that invoke it. An assignment to `location.href`, a redirect driven by a server response, and navigation performed inside a third-party component are all invisible on the same grounds. The conversion ratio is therefore recall against an enumerable syntactic proxy for an application's

navigation, not against its navigation, and the completeness of that proxy is not itself measured. The test-source cross-check is the only method that can see past it, because a URL that a passing test visits is a screen that exists whatever the source looks like, and it covers one application of the six.

Node coverage carries a sharper version of the same threat, and it points the opposite way. Its denominator is the screens the independent parser can address, so a screen whose path neither tool can read is outside the ratio rather than counted against it: refusing to read more of an application raises its reported coverage. The effect is not hypothetical. Three of one application's declared screens assemble their paths inside a template literal from an exported constant; while neither tool read them, that application's coverage was exactly complete, and reading them is what moved its denominator (Section 5.5). Nothing in the ratio itself would have said so. The defence adopted here is that every coverage figure in this thesis is printed beside the count of routes the parser knows are there and cannot address, in the same table, so that a figure bought by refusing to look is visible as one; a coverage ratio reported on its own, for this kind of analysis, should not be believed.

The two units also stand in a many-to-many relation, which the metrics handle unevenly. One construct in a component that many screens render yields one anchored edge that expands to many, which is why the ratio counts constructs and not edges (Section 4.3.2). In the other direction several constructs can yield one edge, and the extractor records the extra ones as merged witnesses so that each is traceable. The conversion ratio credits a construct cited by any witness of an edge, primary or merged, and for most of this work the witness check re-opened only the primary witness, so a construct could count towards the ratio on evidence the precision check never examined. On realworld rather more than a third of the citations in the attributed graph are merged ones, and the proportion is higher on the larger applications, so the gap was not a technicality: the check reported a clean deterministic tier over about two thirds of the evidence that tier rests on, and four wrong targets in bitwarden sat in the part it did not read (Section 5.5). The check now judges every location an edge cites and an edge takes the weakest modality over them, so the two figures are computed over the same witness set. What remains is that the ratio and the precision figure still answer different questions, and the chapter reports them separately for that reason rather than this one.

Merging also costs guard information. An edge holds one guard, so when several constructs under different conditions produce one edge, the edge can represent the condition of at most one of them. The graph is in that respect a weaker object than the source it came from, and a consumer that reads a guard off a merged edge is reading one branch of several. The loss breakdown has a second construct threat. The rules assign each lost construct to the first class that matches, so the precedence order is part of the measure. A construct in a shared component that is used only inside screens with no node is an attribution loss under the present order and a node loss under the reverse order. The sizes of the classes are comparable within one application and under one order, which is what Chapter 5 claims, but they are not independent quantities, and a different order would move constructs between classes without any change to the tool.

Internal validity. Extraction runs on source trees whose dependencies are not installed, so the TypeScript compiler cannot resolve types that come from the framework or from third-party packages. Type-directed steps such as narrowing an injected receiver are weaker than they would be in a fully installed project, and the measured figures are properties of that configuration rather than of the analysis in principle. The mutation experiment has small samples per operator, in single digits for several of the operator and application pairs, with a seeded quota rather than exhaustive generation; one mutant moves a per-operator rate substantially, so the pattern of which operators are detected is more trustworthy than the rates themselves, and the published advice on reporting mutation experiments is followed for that reason [57]. The exclusion rule that removes mutants whose construct is absent from the graph is applied using the graph itself, which couples the sample to the tool's own coverage; the excluded mutants are reported rather than dropped silently, but the sample is not independent of the artefact under test. The test-source cross-check extracts URLs from test source text, which under-samples click-driven navigation and can collect strings that no test ever visits, so it measures node existence and nothing finer. On the instrument these figures are measured on the independent parser follows every lazy specifier in the corpus, and the application whose node coverage it once based on two screens is now read in full by both readers; what the differential test has lost in exchange is independence, since several of the forms it reads it learned from the extractor (Section 4.3.2). That is the reason the runtime method was added, and why the chapter rests the external check on it rather than on the agreement between the two readers of the same text.

External validity. The corpus is six open-source Angular applications pinned to single commits. Proprietary applications are not measured, and they may differ in size, routing style and the mechanisms they use for navigation, which is the threat that open-source corpora are known to carry [34, 35]. Two further limitations come from how the corpus was assembled. The selection is tool-driven: `SAP/spartacus` was rejected because its routing is configuration-driven in a way the extractor does not support (Section 4.1), so the corpus is biased towards applications whose routing the tool already handles, and a figure measured on it is likely to be optimistic with respect to the population of Angular applications. The candidate pool also showed an inverse relation between application size and end-to-end test density, so no application offers both a large route tree and execution-based ground truth. The consequence runs through the whole evaluation: the execution-grounded evidence comes from a medium-sized application, while the findings about scale come from applications that have no execution oracle at all. The results are Angular results. The graph model and the lattice do not mention Angular, and Section 6.4 argues about other routers, but that argument is not a measurement.

Oracle independence. The route parser shares no code with the extractor, which makes it independent and says nothing about whether it is right. That independence is also partial, and Section 5.5 says where it stops: for the route-path forms the second round added — a table behind a freezing call, a path assembled from constants, a module reached through a workspace alias — the two tools were taught the same rules because each was wrong in the same place, so their agreeing about such a path is weaker evidence than their agreeing about a path each reads its

own way. Its first version did not look inside wrapper calls, did not follow a lazily loaded module to the routing module it imports, and walked lazily loaded tables without their prefix, and it therefore reported that every declared screen of mifos had a node; after the correction it finds a far larger set of declared screens of which under a tenth have a node, with the extractor unchanged in both runs (Section 4.3.2). The number that moved was the oracle's, not the tool's. A differential test also only shows that two implementations disagree, never which of them is right, and each disagreement in this study was resolved by reading the application source, by the same person who wrote both implementations.

Experimenter bias. I wrote the extractor, and I also designed the evaluation, selected the corpus and defined the defect classes. The mitigations actually applied are the following. The selection criteria were fixed before any results were obtained, and the rejected candidates are reported with their reasons. The construct counts and the declared screens come from a parser that shares no code with the extractor, with the qualification above: for the path forms added in Section 5.5 the two resolve the same constructs by the same rules, so that mitigation does not cover them. The witness check is mechanical and re-parses the source at the claimed location, which makes it a check on the witness and not on the address: an edge whose target node sits at a path the application does not mount satisfies it. The mutation oracle is the authored delta, so it does not consult the tool's output to decide what the expected change is. The corpus commits, the extractor commit and the harness version are pinned, the whole evaluation re-runs with one command, and the conversion, coverage, loss, remaining-loss, before-and-after and mutation tables of Chapter 5 are generated from the results file instead of being entered by hand. The defect-class table, the oracle table and the inspection of the unreached components are written by hand. Determinism and the absence of accumulated state were checked before any measurement. Eight protocol corrections are reported in full (Section 4.3.2), including the three that made the reported figures worse. What was not done is equally relevant: there was no blinding, no second annotator for the loss classification and no independent audit of the residual constructs that were inspected by hand, and the defect classes were defined after the first observations rather than in advance. The requirement of two independent lines of evidence per defect class is the strongest control that was applied to that last point, and it is the reason one class is still reported as a candidate. It is a weaker control than it first appears: Table 5.3 shows that four of the five accepted classes are carried to two by an observation rather than by a second instrument, so for those four the control is one method plus a judgement I made myself.

The runtime check of Section A.5 removes one threat and introduces others of its own. It removes the one that mattered most, which is that two readers of the same route files can agree on a wrong address and the agreement be read as a result. What it brings in its place is first a selection effect: the method needs an application that builds and boots, and every application in this corpus did, but a corpus chosen partly for being buildable is not a corpus chosen at random. Second, it reads the route configuration rather than the rendered page, so every address it calls mounted is one at which the router would place a component, not one at which a visitor would see it; a route behind a guard that always refuses,

or one whose component throws on render, counts the same as one that works. Third, the build was a development build in each case, because Angular removes the debug surface the method reads when an application declares itself in production mode, and a production configuration can differ from a development one in ways a route table does not show. Fourth, where a workspace application composes the library a measurement is scoped to, the framework's set is a superset of the library's by construction, and part of any difference is scope rather than reading; two of alfresco's three differences are that — `/login`, declared by the shell application, and `/view/authentication-confirmation`, declared by a package that shell installs — and the third is not: `/about` is declared inside the measured library, in a JSON plugin manifest that no reader of the code can see.

The first draft of this paragraph closed by saying that none of these weakens the claim the check is used for, because none could make a mounted address look unmounted. That has the direction backwards. The claim is that an address the extractor mints is one the framework mounts, and it is established by finding the extractor's set inside the framework's. Every threat listed above makes the framework's set LARGER than the set of addresses a visitor can actually reach — a route behind a guard that always refuses is counted mounted, so is one whose component throws, and a development build may carry routes a production build drops. A larger containing set makes containment easier to satisfy, so these threats weaken the no-invented-address claim rather than leaving it alone. What they cannot do is manufacture the failures the check did report: the two alfresco addresses are minted by the extractor and absent from even this generous reading of what the framework mounts, and the same is true of the ten the comparison returns against the route set as it stood before this round. A finding of an invented address is therefore sound under every threat here; a finding of none is weaker than it looks, and is reported as the absence of a failure rather than as a proof of its impossibility.

6.3 Declared approximations

Two of these were found by the runtime check of Section A.5 rather than by reading the analysis, and they are stated first because both are places where the analysis is silent rather than approximate.

A route may be declared outside the language. alfresco's about page is registered by a JSON manifest that names a path and an identifier, which an extension registry binds to a component class at run time. No reader of the application's TypeScript can see such a route, and this one raises no note, because nothing in the code is unreadable — there is simply nothing in the code. A tool that wanted to cover it would have to read the framework's plugin format as a second source language, which is a different undertaking from reading a router configuration and is not attempted here.

Which of several tables a prefix mounts may be decided outside the sources. mifos holds two route tables for its users module, one per identity provider, and selects between them with a constant assembled from `window.env`, a value injected into

the page when the application is deployed. The extractor reads a conditional whose condition the sources fix — a flag written in an environment file is resolved and the arm it selects is read — and declares the subtree unread when they do not, which is this case. The loss is declared and it is five screens wide, which is the price of the rule that decides the question: the table a prefix mounts is the one its route names, or the one the module registers with `forChild`, or the only one in the file, and otherwise none. Reading every table a file holds instead would have given this prefix the right addresses, by accident of the two tables agreeing, and gives any prefix every table a file holds, which mints the cross product of prefix and path wherever two tables differ.

Where such a condition *is* fixed by the sources, the value read is the one the checked-out sources carry. An Angular build may substitute one environment file for another, so a constant a production build fixes differently selects a different arm there, and the graph is then a graph of the configuration that was read. The measurements in this thesis are taken over the sources as checked out, and the runtime check of Section A.5 reads a development build for the same reason, so the two agree about which configuration is under measurement.

The thesis claims soundness only for the deterministic tier and only over the declared route set (Claim 3.1). Following the soundiness position of Livshits et al. [47], the claim is paired here with an explicit list of the constructs the analysis does not decide, so that a consumer of the graph can tell which queries it may ask. The list separates constructs that are in scope, where a failure is a defect that Chapter 5 counts, from constructs that are out of scope, where no completeness is claimed at all.

In scope are route entries whose path is a string literal together with the component they render, `routerLink` bindings whose value is a literal or an array of literals, calls to `Router.navigate` and `Router.navigateByUrl` with a literal target, the nesting relation obtained from element selectors resolved within the importing file's scope, the primary `<router-outlet>` with the shell rule that follows from it, and guards named on a route as labels on the edges entering that route's subtree. Everything in this group is the analysis's responsibility. The failures measured in Chapter 5 are failures inside it: route paths that are constant references are not resolved, route tables behind a lazy boundary are not followed, and some nodes are not linked to the component that renders them. These are bugs with known causes rather than approximations to be declared away, which is why RQ5 could repair them; Section 5.5 reports what repairing them cost.

Out of scope are the following constructs, each with the reason it is approximated and the effect on the graph.

- **Components created programmatically, including dialogs and overlays.** An overlay is a user interface state that no route declares, so it has no node, and the component that implements it is reached from no template, so its navigation sites have the empty scope and contribute nothing. Both the state and everything inside it are absent from the graph.
- **Named outlets and targets of the form `{outlets: ...}`.** An auxiliary route adds a second active route and a second mount point, encoded in the

URL [26]. The model of Chapter 3 represents this as a second mount, but the adapter does not implement it, and the test-source cross-check shows the corresponding URLs among its misses.

- **Navigation relative to the active route (`relativeTo`).** The target is a function of the route that is active when the call runs, so it has no single value in the source. This is the one item in this list that attribution makes approachable, since a scope is exactly the set of screens the site can fire from, and the target can be resolved once per member of that scope.
- **Templates passed as values (`TemplateRef`) and rendered elsewhere.** The nesting relation can no longer be read from element names, and recovering it becomes a dataflow problem over the values that carry the template. This is the same obstacle that Section 6.4 identifies for JSX.
- **Dispatch through NgRx effects and router event subscriptions.** The dispatch relation is specified in Chapter 3 and not implemented. On the pinned extractor a navigation inside an effect is attributed to no screen; the approximation of Section 5.5 gives it $\top$ instead, which is sound and coarse — an effect can fire on any screen, so the edge is offered from the shell at *may* rather than from the screen that actually dispatched the action.
- **Navigation inside signal effects and observable subscriptions.** The firing condition is a data dependence in a graph the runtime builds, not a control-flow condition in the program text (Sections 2.7.5 and 2.8). The model gives such edges the modality *unknown*, with the read set recorded as the symbolic guard. The pinned extractor emits none; after Section 5.5 an unknown edge is emitted, but into the `u_` sink and without the read set, so what it records is that the screen is left, not under what condition.
- **Computed navigation targets.** A target built at run time from values cannot be enumerated statically in general. The analysis emits an edge into the screen's `u_` sink, or over-approximates into the may tier, where a single unresolved call site can connect to every declared route, as one of the protocol corrections showed (Section 4.3.2).
- **Injection tokens with several bindings.** Where a token can resolve to more than one implementation, the analysis joins over all of them, and the resulting edges are capped at *may*. Resolution is relative to an injector, so the provider hierarchy is part of the input (Section 2.7.4).
- **Configuration-driven route registration.** Where the route table is assembled at startup from provider configuration instead of being declared as data, neither the extractor nor the independent parser recovers the routes. This approximation bounds the corpus as well as the tool, since it is why one candidate application was rejected (Section 4.1).
- **Ambiguous selectors in the nesting relation.** When a selector belongs to more than one component, the candidates are narrowed to those the rendering file imports; where none is imported, the analysis joins over all of them and records a note. Such a join can attribute a site to screens on which the component it belongs to is never rendered. Attribute selectors are matched as element selectors are, so a directive is in the nesting graph wherever its attribute appears.

Table 6.1: Prevalence of the approximated constructs in three of the six applications, produced by `approx-counts.mjs` in the harness. The figures are call-site counts over the application sources with tests excluded, taken at the pinned corpus commits. They are a different unit from the construct denominator of Chapter 5, which comes from the route-oracle parser.

Construct	realworld	alfresco	bitwarden
`dialog.open`	0	3	0
auxiliary outlets	0	7	0
`relativeTo`	1	1	7
`TemplateRef`	2	0	11
`createEffect`	0	49	0

Table 6.1 gives the prevalence of the approximated constructs in the three applications that were cloned for the mutation run. The in-scope kinds are not repeated, because the construct denominator of Table 5.1 already counts them with the parser. The counts come from `approx-counts.mjs`, which is part of the harness and runs over the application sources with tests excluded. It counts call sites, which is a different procedure from the parser that produces the construct denominator of Chapter 5, so the two are not comparable term by term. Three of the six applications were counted, so no corpus-level prevalence is claimed.

Two things follow from the counts. Set against the construct denominators of Table 5.1, which are 40, 34 and 132 for these three applications, the approximated kinds are few in realworld and bitwarden, so the approximations do not explain the coverage figures of Chapter 5 for those two. In alfresco the approximated sites outnumber the 34 constructs, almost entirely through `createEffect`, so for that application the approximations cannot be set aside. The two numbers are not the same unit, since the denominator counts navigation constructs while the `createEffect` figure counts effect declarations, whether or not they navigate. The approximated kinds are also concentrated: auxiliary outlets appear in one application of the three, reactive effects only in that same application, templates passed as values mostly in another, and relative navigation everywhere but in small numbers. An approximation that costs nothing on one application can therefore be the dominant one on the next, which is an argument for declaring the list rather than reporting a single aggregate.

The call-site counts also understate the structural cost of an approximation. A handful of `dialog.open` call sites can open many different components. The inspection of the owner components that attribution never reaches found about sixty components across the corpus that are opened programmatically, most as dialogs, whereas the grep finds three `dialog.open` call sites, all in alfresco, in the three applications it covered. The two figures cover different scopes and are not directly comparable. The right unit for the cost of this particular approximation is the number of components and navigation sites it strands, not the number of calls that strand them.

Table 6.2: Constructs that provide the input relations, by router.

Concept	Angular	React Router	Vue Router
Outlet	`<router-outlet>`	`<Outlet />`	`<router-view>`
Several outlets	named outlets, encoded in the URL	none	named views, not in the URL
Declarative link	`routerLink`	`<Link to>`	`<router-link :to>`
Imperative navigation	`Router.navigate`	`useNavigate()`; redirect from a loader	`router.push`
Route guard	per route (`canActivate`, ...)	loader that throws a redirect	per route (`beforeEnter`) and global (`beforeEach`)
Access to services	hierarchical injectors	context and hooks	`provide`/`inject`, composables, plain imports
Reactive trigger	signal effect	`useEffect`	`watch`, `watchEffect`

6.4 Transfer to other frameworks

All measurements in this thesis concern Angular. How much of the approach would carry over to React with React Router and to Vue with Vue Router [60, 80] is argued below without measurement.

What follows is a qualitative theoretical analysis and not a measurement. It compares the documented behaviour of the three routers with the input relations that the analysis needs, and what it yields are hypotheses about where the work would move, at the level of evidence of a design argument. Nothing in it shows that the approach performs on React or Vue applications as it does on Angular ones. Establishing that would require a corpus for each framework and the methods of Chapter 4.

The analysis has a framework-independent part and a framework-specific part. The graph model, the lattice of scopes, the fixpoint, anchored edges and the expansion query do not mention Angular. What is specific to Angular are the four input relations of Section 3.2: component nesting, router outlets, the call graph with dependency injection, and dispatch relations. Moving to another framework means deriving the same four relations from that framework's constructs. Table 6.2 lists the corresponding constructs.

Outlets transfer directly: in all three routers a parent route renders a placeholder where the matched child is inserted. The components above the placeholder form a shell that is present on every child screen, so the scopes $\top$ and $\mathit{subtree}(r)$ have the same meaning. Vue's named views are simpler than Angular's named outlets, because they do not appear in the URL; they add a second mount point but no

auxiliary route. React Router has no equivalent, so this class of defect does not arise there.

The call graph is easier in React and Vue. The hardest Angular-specific step is resolving an injected service through the injector hierarchy. In React, a navigation function is usually obtained from `useNavigate()`, and a hook can only be called while a component renders, either directly or through other hooks. Every such navigation site therefore has an owning component that can be found by following hook calls, and no injector needs to be resolved. Vue composables behave the same way inside `setup`. The case that remains is code that imports the router instance directly, which Vue applications often do in stores and HTTP interceptors. This is the analogue of Angular's service case: the site has no component of its own, and its scope is the join over its callers. Since the link is a plain module import, it can be resolved with ordinary import resolution, as in the JavaScript call graphs of Feldthaus et al. [23].

Redirects do not transfer, and the asymmetry was found by porting the model's reading rather than by arguing about it. Angular's validator refuses a route that declares `redirectTo` beside `children` or a `component`, so a redirecting Angular route has neither a layout nor a component to lose and the model's step from "redirects" to "renders nothing" costs nothing. Vue Router applies a record's redirect only when that record is the last one matched, so a redirecting parent with children does render its component for a matching child. Carrying the Angular reading into the Vue extractor dropped those components; the extractor now keeps the component of a redirecting record that has children, and declares the residue — that navigating to the parent's own address lands on the redirect target with that component unmounted — as a note at the parent rather than modelling it as an edge. The same porting exposed a second Vue-only hazard with no Angular counterpart: a table that mixes the Vue 2 catch-all `'*'` with the Vue 3 form `'/:pathMatch(.*)*'` folds both to one address, and the extractor keeps the record declared first, which under Vue Router 4 is the invalid one. The surviving component is then the wrong one. The collision is declared, so the graph says that a record was dropped at that address; which of the two it should have kept is not something the table alone determines.

Guards move to different scopes. A redirect thrown from a React Router loader fires when its route, or any route below it, is matched. It plays the role of `canActivate` and is anchored at $\mathit{subtree}(r)$. Vue's global `beforeEach` guard has no direct Angular counterpart. A redirect from it is anchored at $\top$, which the lattice already contains.

Component nesting is harder in React. Angular and Vue keep templates in a separate language, so the nesting relation can be read from element names. In React, components are created in JSX, which is ordinary JavaScript. A component can be stored in a variable, passed as a property or as `children`, and rendered under any condition the language can express. Recovering the nesting relation then becomes a data flow problem in its own right, closer to points-to analysis than to reading a template. This is the main place where a React version of the analysis would need new work.

The reactive boundary is the same. A navigation inside `useEffect` or a Vue

watcher fires when its dependencies change, so, like a signal effect in Angular, it would be given modality *unknown*.

The lattice, the fixpoint and the anchored representation transfer unchanged. Of the input relations, outlets and guards transfer with small changes, the call graph becomes simpler, and component nesting becomes harder in React. These are expectations derived from the routers' documented behaviour. Whether they hold on real applications would need a corpus and the same evaluation, which is left for future work.

6.5 Future work

An oracle for the screen set on a *large* application is now the cheapest addition that would strengthen the thesis most. The hand-built ground truth of Section 5.3.4 supplies one for the smallest application in the corpus, and it was worth building: it convicted the injected-service join of attributing a site to nine screens it cannot fire from, which no other method here could do. What it cannot do is carry to an application of six hundred screens, where reading every site by hand is not practical, and that is exactly where the computed scopes are widest (Table 5.11). Driving such an application into a signed-in state and reading its rendered links, or annotating a stratified sample of its sites rather than all of them, are the two ways to get there. Recording, for each attributed site, the relation that supplied its scope would narrow the verdict further: the ground truth here shows which *sites* are wrong, and that would show which *rule* made them wrong without having to re-extract once per rule.

The two defects that cap the larger applications are the most urgent, because nothing else in the analysis can be evaluated properly while they stand. Both were repaired in the course of answering RQ5, so what follows describes what the work was rather than what remains: resolving constant-valued route paths means following a path expression to its definition and folding it, which is a local analysis over the route tables and turned the application that had collapsed to a single node into one with a node for every declared screen. Following lazy boundaries means resolving a `loadChildren` or `loadComponent` specifier to the file it names and continuing route extraction there, including through a routing module that a lazily loaded module imports. The independent route parser follows lazy boundaries after its correction (Section 4.3.2), and it finds 84 declared screens in ghostfolio, where every route path is a constant reference (Table 5.2), so the work is known to be feasible on this corpus, and the parser's output gives the expected result to check against. The gain is not limited to the nodes recovered. A large part of the attribution losses that remain after attribution are constructs whose scope was found but whose target screen has no node, and those are repaired by node extraction rather than by any change to the attribution pass.

The part of the model that Chapter 3 specifies and the prototype leaves out comes next: the call graph with dependency injection, and the dispatch relations that carry NgRx effects and router event subscriptions. The remaining losses in services and guards quantify what the omission costs on this corpus, which makes

the work measurable rather than speculative. Resolution would follow class hierarchy analysis against Angular's provider declarations, in the style the framework-modelling literature recommends [17, 67, 3], and the fixpoint and the complexity bound for it are already stated. Guards that return a `UrlTree` belong to the same group, since a redirecting guard is itself a navigation site and not only a label.

The witness check exposed a defect in how the guard set of a screen was assembled from the route chain: the assembly ignored a guard carried by a route a wrapper function returns — the construct through which one application in the corpus routes every one of its feature tables. Reading it is what took that application's deterministic tier from an order of magnitude more edges down to 1, and took the corpus tier from 26 violations of the soundness property to 0; the conditional demotion that followed removed the rest (Section 5.5). The mutation operator that removes a guard is the obvious second test for it, and on this corpus it reaches only the guards the graph already records on an edge (Section 5.4). The wider treatment of guards in Chapter 3, where the guard of an edge is the conjunction of the conditions on the containment path with the guards of the target route, is the more substantial piece of work and would subsume it.

Dialogs and overlays should become user interface states. They are the largest declared approximation in structural terms, they strand entire components rather than single call sites, and the model needs only a second kind of node together with edges that open and dismiss it. The route-derived definition of the screen set would have to be widened, which is the reason this is not a small change to the adapter.

The runtime tier is the complement to the whole static approach rather than an extension of it. The model already admits observation identifiers as witnesses alongside source locations, so an observed transition can enter the graph without being confused with a derived one. Setting that tier against the dynamic lineage, where the state flow graph comes from firing events on a running application [50, 51, 74], would answer the question this thesis cannot: how much of what a crawler finds the static graph already contains, and how much of what the static graph contains a crawler never reaches. The Android work has the same structure, falling back on runtime traces exactly where static attribution of shared code fails [79].

The corpus needs to grow in three directions. An automated search pipeline over a larger pool of repositories, with the published filters for repository quality applied mechanically [34, 35], would replace a hand-screened set of ten candidates and would weaken the tool-driven selection bias of Section 6.2, provided that applications the extractor handles badly are kept in the corpus rather than rejected. A case study on a proprietary industrial application, reporting only aggregate figures, is the most direct answer to the external validity threat, since enterprise routing style is exactly what an open-source corpus cannot show. A minimum density of user interface tests should become an explicit selection criterion whenever execution-based ground truth is needed, since the candidate pool showed that this density falls as applications grow, and without such a criterion a study ends up with its oracle and its scale on different applications.

A React or Vue adapter, evaluated with the same harness on a corpus of the same shape, would turn Section 6.4 from an argument into a result. The predictions are

specific enough to be falsified: outlets and guards should transfer with small changes, the call graph should become easier because a navigation function is obtained through a hook or a composable, and component nesting should become harder in React because JSX makes the nesting relation a dataflow problem.

The defect class "node not linked to its component" still has one confirmation, from the comparison between the route parser and the graph, and the rule adopted in Chapter 5 admits a class only with two. A second method has to reach it independently, and the test-source cross-check is the natural candidate, since a screen whose node exists but carries no component link should still be visited by tests while contributing no outbound edges. Until then the class stays a candidate, and the share of the corpus total that it accounts for stays provisional with it.

The use that motivated the thesis is still unmeasured. Agents that drive a user interface or a repository work without a navigation model: mobile testing agents pass the current screen to a model and replay the action it returns [46, 72], application-specific knowledge for them is obtained by dynamic exploration [73, 71], and coding agents navigate a repository through an interface whose design measurably changes their performance [31, 76, 81]. Whether a graph of screens and guarded transitions, recomputed from source and carrying a witness on every edge, improves either kind of agent, or improves automated test generation, is a controlled experiment that this thesis does not attempt. The graph and the harness are the artefacts such an experiment would need, and the defects quantified in Chapter 5 are what it would have to control for, since a model that is missing half of an application's screens would confound the comparison.

Chapter 7

Conclusion

This thesis set out to measure how much of the navigation structure of an Angular application can be recovered from its source code without running the application, to explain where that recovery fails, and to repair the largest class of failure with an analysis that attributes a navigation site to the screens from which it can fire. The selection criteria for the corpus were fixed before any results were obtained. The protocol was corrected eight times while it was being developed, including the definition of the conversion ratio and of its denominator (Section 4.3.2), and the result tables of Chapter 5 come from the harness run on pinned commits.

The answer to RQ1 is that the loss happens at two levels and that they are very far apart. In all 6 applications every screen the static readers find declared has a node, and the runtime method confirms that no node sits at an address the framework mounts nothing at. That completeness is over the route set a static reader can read, and not over the addresses the framework serves: the same runtime method finds 251 answered addresses with no node at all, 242 of them in the one application whose paths a custom matcher computes, so only 2 of the six are complete against what the browser answers. Below that level no navigation construct becomes a deterministic transition on any of the 6 applications, with attribution or without, once a navigation that runs under a condition is demoted as Claim 3.1 requires. Node extraction is not the bottleneck it was when this work began — it was, and Section 5.5 records what repairing it took.

The answer to RQ2 is that the failures fall into five defect classes, each confirmed by at least two independent lines of evidence, at least one of them from a named evaluation method, together with one candidate class that has a single confirmation, and that assigning every lost construct to exactly one class makes attribution the largest class in every application of the corpus once the node defects are repaired.

The answer to RQ3 is that scope attribution recovers 285 of the 455 constructs the loss rules assign to it, 62.6 % of that class, on every application in the corpus, roughly doubling the graph from 5859 edges to 11601; and that every one of those conversions is navigation the graph reports as possible rather than certain, since after the conditional demotion of Section 5.5 no edge is deterministic either before attribution or after it. Attribution therefore costs nothing in deterministic precision only because there is no deterministic tier for it to cost. Whether the computed screen sets are correct is established on one application and not on the corpus: read

site by site on realworld, the analysis names 97.3 % of the (site, screen) pairs the application really has at 95.3 % precision, every wrong pair coming from a single over-approximating rule, and no method here can put that question to the other five.

The answer to RQ4 is that the graph is sensitive to authored source changes in the constructs it represents, with 59 of 64 scored mutants detected against 42 of 53 without attribution, so attribution raises both the number of changes that can be scored at all and the rate at which a scored change is detected. A route path rename is detected in every scored mutant, which is close to guaranteed by construction and tests node extraction rather than behaviour; of the 42 mutants from the three operators that can fail, 37 are detected. Removing a guard is detected in every scored mutant, which is the operator the corrections of Chapter 5 were about. 1 mutant produces no change in the graph at all, a retargeted call in a component the analysis could not place under any screen, so the graph holds no edge for it to move. The 6 mutants that cannot be scored are guards the graph can record on no edge: for 5 of them no edge enters the screen, which is RQ1's coverage gap, and 1 guards a route that yields no screen for RQ1 to have missed. Neither is a defect in how the graph represents a guard.

The thesis contributes a measurement and the apparatus that makes it checkable, and a mechanism whose specification outruns its evidence. The mechanism is scope attribution, specified as a dataflow analysis over the powerset lattice of screen sets and implemented over two of its four input relations, with a soundness property for the deterministic tier that is stated and mechanically tested, though not proved, over the declared route set and paired with an explicit list of the constructs the analysis does not decide (Claim 3.1, Section 6.3). It recovers 62.6 % of the loss class it addresses, almost all of it onto the uncertain tier, and where the real (site, screen) pairs could be read by hand it raises recall from 94.7 % to 97.3 % while taking precision from 100.0 % to 95.3 % — a trade rather than an improvement, and established on realworld alone. Nothing in its formulation depends on a particular extractor; what an extractor supplies is the screens and the navigation sites it ranges over, and Chapter 5 shows that what the mechanism can recover is bounded by how completely those are read. The measurement is the part that stands on its own. Static navigation extraction is measured on a corpus of six Angular applications pinned to fixed commits, with five methods. Four of them read the applications' sources — a witness check that re-parses the source at each claimed location, a differential test against an independently written route parser, a cross-check against the URL literals in the applications' own end-to-end specifications, and a mutation experiment whose ground truth is the authored change — and share that footing as their common weakness, since two readers of the same text can be wrong in the same way. The fifth reads the route configuration the framework itself holds at run time, and was added because the first four can agree on a wrong address. The failures are classified into defect classes that are admitted only on two independent lines of evidence, at least one from a named method, and every construct the extractor loses is assigned to exactly one class, which makes the classes comparable within an application and across the corpus. The corpus and the harness are reusable artefacts: the evaluation re-runs with one command against pinned commits of the extractor and of every application, and the conversion, coverage, loss, remaining-loss,

before-and-after and mutation tables of Chapter 5 are generated from the results file. The few figures that compare the present instrument with the one the work began with are generated too, but from that earlier commit's own results read out of version control, since re-running the extractor now would measure a different tool. The defect-class table, the oracle table and the inspection of the unreached components are written by hand.

What the measurements establish is that a declared route table is a usable starting point for static navigation extraction and not a sufficient one. The two levels of loss bound each other, so neither node extraction nor attribution can be improved into a usable graph on its own, and scope attribution recovers nearly all of the attribution losses on realworld, where node extraction is complete, and far fewer on the larger applications, where node defects limit it. Where a construct is in the graph, a change to it is almost always visible in the graph, which is the property that change impact analysis and commit-time checking need; where it is not, no change to it is visible, and the coverage gap RQ1 measures is what the excluded mutants of RQ4 report a second time.

RQ5 asked whether the losses belong to the applications or to the tool, and the answer is that almost every loss belongs to the tool, with one instructive exception: ghostfolio computes a route's path in a custom `UrlMatcher`, which no reader of a route table can resolve, and that screen stays a declared blind spot rather than a repair. Every other defect class resolved to a construct the extractor could read and did not: a route table reached through an NgModule, a route factory, a path named by a constant, an enum or an i18n segment, a workspace alias, a loader that references its module instead of importing it. With those repaired, 6 of the six applications hold a node for every screen the static readers find declared, 2 hold one for every address the running application answers — the runtime method finds 251 answered addresses with no node, 242 of them in one application — and 98.5 % of the navigation sites that remain in scope are accounted for — recovered as a transition, recorded as a destination only the run time knows, or anchored at a source the analysis cannot place. Three quarters of those sites are mifos's, so the corpus figure is close to one application's. The sites that remain each name a reason, enforced by a check that fails when any does not, and some name a route the application never declares. What the repairs cost is reported with them, and it is not what one would hope for. The earlier instrument published a deterministic tier of 1024 edges with 26 violations in it, and four corrections took it to nothing, each hidden by the one before: a guard carried by a route a wrapper function returns, a `canActivate` element that is a call rather than a name, an edge that several constructs cite taking the modality of the first of them instead of the weakest, and a navigation that runs under a condition being called deterministic. The first three left 20 edges with 0 violations; the fourth found every one of those running under a condition, and demoted all of them (Section 5.5). None of the edges that left became a correct target; they stopped claiming to be deterministic, which they never were. On all 6 applications the tier is now empty, so RQ1's stricter measure reads zero across the corpus, and Claim 3.1 holds there only because it ranges over nothing. The exchange is the end of a sequence in which each claim that did not survive its own test was withdrawn.

What they leave open is also specific. The call graph with dependency injection and the dispatch relations are specified and not implemented; the approximations of Section 5.5 stand in for them — a guard scoped to the routes that name it, a service to the join over its injectors, an effect to $\top$ — which is coarser than the model and leaves a class nothing injects with no scope at all. One defect class still waits for its second confirmation. And the sharpest gap is in the evaluation rather than the analysis, though it is now half closed: asking the running applications which links they render confirms 29 of the 33 rendered (screen, pattern) pairs against the computed scope, and shows the 4 it misses to be sites attribution declined to place rather than sites it placed wrongly. What that cannot do is convict a scope of being too large: only 7 of the predictions at those screens name a destination exactly, so the direction is close to untestable by this method. Reading one application's sites by hand does convict it, and the verdict is specific and unflattering: against the 188 pairs that application really has, the analysis asserts 9 more that it does not have, all of them at 1 of its 39 sites and all from the rule that joins a navigating service over its injectors; the level that stands for earlier work's reach recovers 94.7 % of the real pairs while asserting nothing wrong at all, against 97.3 % for this analysis. It judged 30 screens of 806, because without a backend the rest redirect to a sign-in page. Driving the applications into a signed-in state is the work that would decide the other half. Whether a graph of screens and guarded transitions, recomputed from source and carrying a witness on every edge, helps the consumers that motivated the work, agents that drive a user interface or a repository and automated test generation, is not measured here; the extractor, the corpus and the harness are what such a measurement would start from, and the defects quantified in Chapter 5 are what it would have to control for.

Appendix A

Validating the measurement

This appendix holds the parts of the evaluation that establish what the measuring instruments can and cannot see. Nothing here is a result of the analysis; it is the record that the figures of Chapter 5 were produced by instruments whose own failures were looked for and found.

A.1 Nodes the two static readers disagreed about

Table 5.2 also reports the other direction of the same comparison, which the differential test produces and which an earlier version of the results chapter left out. Every figure in this section is the first round's, measured with the parser as it stood then; Section 5.5 repeats the comparison with both tools corrected and the numbers move a long way. As the first round measured it, the parser holds no declared screen for 197 of the 338 nodes in the corpus, so node extraction is as inaccurate as it is incomplete. For k8s dashboard the figure is almost entirely the parser's own limit, 37 of its 38 unmatched nodes being the lazily loaded entries it cannot follow. Mifos is not explained that way: it has one blind spot and 120 unmatched nodes. Table A.1 decomposes all 197 by the kinds of route the parser found at the node's path, joined on the parser's own normalisation.

Three groups come out of it. For 43 nodes the parser could not follow the route that would have declared them, so those are the oracle's limit and not the extractor's, and 37 of the 43 are k8s dashboard. For 11 nodes the parser did find a route, but one it classifies as a path prefix or a redirect. Section 3.1 admits only component-bearing routes into the screen set, so the implemented node set contains 11 elements the model excludes: one in realworld, two in alfresco, six in bitwarden and two in mifos. The clearest case is `/profile` in realworld, whose route declares `loadChildren` and no component. These nodes make $screen(r)$ answerable for a route the model treats as a path prefix only.

The remaining 143 are the substantial group and have no declared route of any kind at the node's path. They are concentrated in mifos, which has 117 of them against a single parser blind spot, and in bitwarden, which has 23. Either the extractor emits nodes for paths it assembles differently from the parser, or the parser misses route tables it does not report as blind spots. The two methods disagree here without either being able to adjudicate, and at the close of the first round it was

Table A.1: Why each unmatched node has no declared screen. A node is placed in the first row that applies, and the categories are exclusive.

Why the node has no declared screen	rw	alf	gf	k8s	bw	mif	Total
No route declared at that path	0	1	1	1	23	117	143
Parser could not follow the route	0	3	0	37	2	1	43
Route is a prefix or a redirect, so outside S	1	2	0	0	6	2	11
Declared screen, so a join artefact	0	0	0	0	0	0	0
Unmatched nodes	1	6	1	38	31	120	197

the largest single piece of unexplained behaviour the evaluation had found, sitting underneath every figure that counts nodes.

The second round resolved it, and the answer was the FIRST of the two explanations almost throughout — the opposite of what an earlier draft concluded. 138 of the 143 sit at an address that is the tail of a route the parser had already declared in full: the extractor had reached the table without its parent prefix and minted `/premium` where the parser declared `/settings/subscription/premium`. That is the extractor assembling the path differently, not the parser missing a table. The other 5 are the catch-all each of those five applications declares, `path: '**'` with a component, which the extractor mints at the path `*` while the oracle's policy keeps it out of the screen set: there the two tools disagree by convention, not over a table either of them missed. Which way the group fell matters beyond the bookkeeping, because it is the difference between a measuring instrument that was wrong and a tool that was: the repairs of Section 5.5 are accordingly almost all in the extractor. The figures above are the first round's and are left standing as the record of what that round saw; Section 5.5 repeats the comparison with both tools corrected, and the corpus is then left with 2 nodes that no declared screen matches, of which 2 sit at the path `*`, where the extractor mints the catch-all the application declares and the oracle counts no screen. The parser had its own share of the problem, counted in Section 5.5: a route array behind a module it refused to follow, a path assembled from a constant it did not resolve, a lazily loaded table walked without its parent. It was the smaller share. Reporting the disagreement rather than attributing it was the right call at the time, and working it is what produced most of Section 5.5.

So the baseline recovers a small fraction of the navigation, and loses it at two levels: some screens never become nodes, and most navigation sites of the screens that do are not turned into edges.

On the instrument the figures of Chapter 5 are measured on, this disagreement is gone: the parser declares a screen for every node the extractor mints except the wildcard catch-all route, which it does not count as a screen, and the runtime method confirms that the framework mounts a component at every address the extractor claims. What this section records is therefore not a standing defect but the state the differential test was in when it was the only check available, and the reason a third, independent reader was added.

A.2 How the declared-screen set moved

Table 5.16 gives node coverage before and after. 6 of the six applications now hold a node for every declared screen. The denominator of those ratios deserves more than a column of its own, because on this corpus the declared-screen *count* turns out to be a poor summary of the declared-screen *set*: between the oracle as it stood before this round and the oracle reported here, 5 of the six applications' declared sets changed, and 1 of those changed while the count stood still. A moving denominator is how a coverage figure is rigged without anyone intending it, and a denominator that holds its size while every address inside it changes is how the same thing happens without even the column moving. Each of the five is accounted for below, from the generated subtraction rather than from a sentence.

ghostfolio is the clearest case and the one that would have passed unnoticed. Its count did not move at all: 84 declared screens before, 84 after. Every single address in it changed. 84 paths left the set and 84 arrived, because the earlier oracle recorded the verbatim expression a route's path was written as rather than the address it resolves to — `/internalRoutes.account.path` is what it stored, where the application mounts `/about` and its siblings. A reader comparing the two counts would have concluded that nothing about ghostfolio's route set had changed, and would have been wrong about all of it.

k8s dashboard carries the largest move, and it was missing from this account until the provenance of the comparison was fixed. It went from 2 declared screens to 67, with 65 arriving and none leaving. The earlier oracle reported 37 blind spots for this application, every one of them a `loadChildren` target it could not resolve, so it declared the two screens its two eagerly registered tables carry — `/login` and the application root — and nothing beneath any lazy module; the oracle reported here declares the whole tree with no blind spot. That the earlier figure was a near-vacuous denominator, and that coverage against it was therefore 100 % of almost nothing, is a fact about the measuring instrument and not about the application.

bitwarden went from 97 declared screens to 98. 3 were Storybook fixtures, throwaway tables such as `/vault` and `/sm/:organizationId` that exist only to render one component in isolation; neither tool reads them now, and the oracle reports how many files it set aside. 40 were inside the application. 26 of those left the count for ghostfolio's reason: they were recorded under a verbatim expression rather than an address — `/AuthRoute.Login` is what the earlier run stored, because the enum behind it was unreadable — so they leave that count and arrive in this one at the addresses they actually mount. The rest are the mifos defect in miniature: the earlier run read their path segments correctly but placed them at the project root, as `/password` and `/session-timeout`, because it could not follow the lazy table that carries them; they are declared in this run at the addresses the application mounts, under `/settings/security/` and `/vault/`. Those are the same screens at a different address, not screens gained or lost, which is a distinction a count of the denominator cannot make and a diff of the set can. 44 arrived, from two causes: a route table wrapped in `Object.freeze` that both tools learned to read, and the report and member subtrees, which were declared at the application root

until Section A.5 showed the running router mounting them elsewhere. Against the 98 screens that remain, the graph holds a node for every one.

An earlier draft reported bitwarden against 159 declared screens and decomposed that figure in detail, and the decomposition was wrong in every part. The 159 came from a file produced by a revision of the oracle from the middle of this round, dropped into the directory the tables are generated from and read as though it were the earlier oracle's output. Nothing in the generator could tell: the file is internally consistent, as every revision's output is, and an absent file was read as an application whose denominator did not move, in silence. The comparison is now made against the earlier oracle's own committed output, read from the repository rather than from the directory the run writes into, so the revision each column belongs to is a fact about the repository and not about what a working directory happened to hold. The cost of not having done that is the paragraph this one replaces.

The two remaining moves are small and are printed for the same reason. alfresco went from 25 declared screens to 26: 0 left the count and 1 arrived, because of the workspace-alias repair rather than because anything was set aside. mifos went from 610 to 605, with 8 paths leaving the count and 3 arriving: the routes of its reporting module, which the earlier run placed at the project root as `/`, `/:filter` and `/run/:name` because it would not follow a `baseUrl` import, now sit at `/reports` and beneath it. Fictitious addresses left the set and real ones took their place, and because more left than arrived the denominator moved down. The net change is too small to move any percentage in Chapter 5, which is exactly why it is printed: a denominator that moves without being mentioned is how the previous figure survived three rounds of review, and the only defence that generalises is to generate every part of the subtraction and let it be checked.

One caveat of Chapter 4 can now be priced. The oracle and the extractor agree about an edge only where both read the same source, and 374 edges across 3 applications — 263 of them in bitwarden, 2 of those on the deterministic tier — have their only witness in a file outside the application directory. What the check records is that the witness lies outside, not the route by which the file came to be read, so the figure is reported here and not explained; the files are of the kind a monorepo puts beside an application, a shared library and, in bitwarden, the repository's other front ends. Both tools read those files, so their agreeing there is not independent evidence of anything; the witness check reports the figure rather than excluding the edges. The reason is not that those edges are clicks in the application measured — the files in bitwarden belong to a sibling front end built from the same repository, and whether its components are reached in the application under measurement is not established here. It is that a precision figure is a claim about the edges this tool emitted, wherever it read them, and a reader who wants the figure over the measured directory alone can subtract the count. The dead-link census of Section 5.6 takes the other decision for the other reason: calling a link dead asserts something about an application, and an accusation needs the link to be reached in the one being measured, so there it is the boundary that decides and not the count.

The reason to distrust that last sentence is not in this application but in the mechanism, and this round supplied the illustration. Three of bitwarden's declared

screens were, for most of this round, outside the denominator entirely: their paths are assembled inside a template literal from an exported constant, neither tool could read them, and a denominator counted without them gave this application a coverage of exactly 100 %. They were readable one exported constant away. Both tools read them now and the figure is honest, but nothing about the figure itself would have said otherwise: a screen neither tool can address is invisible to a coverage ratio in exactly the way a screen that does not exist is. The only defence is to report what was set aside, which is what the blind-spots column is for and why it is printed beside every coverage figure in Chapter 5 rather than in a footnote.

That so many reach every declared screen is a weaker result than it sounds, and the blind-spots column is why: it counts the routes a tool knows are there and cannot address, and reaching every screen one can see says the walk finds the route tables rather than that the graph is complete. What the graph does with the navigation is the accounting below.

A.3 Every remaining site names a reason

27 sites remain unexplained, and Table A.2 gives the reason for each. The reasons are produced by a script that exits non-zero if a single site reaches the end of it without one, so a site the analysis cannot explain is a failing state rather than a silent remainder. The largest group, 15 of the 27, is the attribution gap of Chapter 3 showing through: a class the extractor parsed and found a navigation site in, and could place under no screen, because placing it needs the call graph with dependency injection that Section 3.2.3 specifies and this implementation does not build. The reason is the extractor's own note and not this harness's inference, which matters because the alternative wording — that nothing in the application injects the class — would be a claim about the application where the truth is a claim about the tool. A second group concerns a target the extractor read and could not place: 4 sites whose target matched no route, split by what can actually be claimed of each — 0 a relative target with no base to resolve against, 0 inside a subtree one of the tools could not read, none in an application whose route set is a lower bound, and 4 that nothing accounts for but the application. Each is decided here by testing the target against the independent oracle's route set, pattern against pattern, and not by repeating whatever note the extractor had left at the site: the note says no node of the extractor's matched, which is a claim about the extractor.

A.4 The four dead-link corrections

Four corrections belong with this finding, and all four came from having it attacked. Three of them are the same mistake made in three places, which is the more useful thing to report.

A target no route declares is not a target that goes nowhere. An application with a `**` route catches every unmatched URL, and it does so in one of two ways: a `redirectTo` forwards the URL to another screen, and a `component` renders one.

Table A.2: Why each remaining site is not a transition. The script that produces this table fails if any site has no reason.

Sites	Reason the site is not a transition
15	A class the extractor could not place under any screen
6	Over-approximated at the site
4	The target names no route the application declares
1	A service; whether anything injects it is not established
1	The file is parsed, but nothing lands near the site
27	All, none of them without a reason

The extractor follows both, holds the resulting edge at may, and records a note saying the target matched nothing and where the catch-all sent it. The third round followed only the redirecting flavour — which is not the flavour either application the surviving count comes from uses, so the correction held for the one application it had been written against and failed for the two that needed it.

Resolving the target is one claim and calling the link dead is another, and conflating them is how the first version of this finding went wrong. bitwarden declares its authentication paths through an enum the extractor had failed to read, so targets such as `/login` matched nothing for a reason that was the extractor's, and the wildcard then forwarded every one of them and raised that application's recovered figure by eight points. That enum is read now, and so is the wrapper call that holds it, so those paths resolve rather than being forwarded; what remains is the mechanism. An earlier version of this paragraph named three bitwarden paths assembled inside a template literal instead; those are read now, which is what moved its denominator, and what is left there is a boundary rather than a path. The note says which of the two it is, because a dropped subtree and an unreadable path are not the same loss. The edge is drawn either way — Angular really does forward those URLs — so what had to change was the claim attached to it, not the edge. The extractor counts the declared paths it could not read and records one note per application saying the route set is a lower bound, and that caveat is written into every wildcard note from that application.

What the caveat then does to a candidate is the part this round changed. A single unreadable declaration used to void every claim of this kind across the whole application, which is severe and was deliberate: the alternative is a census that reports an extractor's blind spot as an application's defect. It is also a harder question than the census asks. Whether an application's whole route set was read is one question; whether *this* target is served is another, and the runtime check of Section A.5 answers the second directly, because the configuration it reads is the one the framework holds. Each caveated candidate is therefore put to that configuration. 23 are withdrawn because the framework serves a screen at the target, which makes them a measurement of what the extractor failed to read rather than of what the application got wrong; 19 are withdrawn because the target is matched by a route that places no screen of its own, and 0 because it is answered by a redirect. 0 sites keep the caveat. A matcher route leaves undecided only what it could claim — the

addresses under its own prefix — and reading it as leaving the whole application undecided withheld twelve findings on a ground the harness's own navigation refutes, ghostfolio's matcher sitting at `/admin` and reaching nothing above it. Where the configuration still declines, a navigation is asked instead: ghostfolio's `/admin/users` is behind that matcher, and the recogniser places a component there, so the three sites naming it are withdrawn rather than left undecided. What survives is a candidate whose target the framework answers with nothing but its catch-all.

A route neither tool can read is indistinguishable, from a navigation site, from a route the application never declares — and this thesis credited the difference to the application three times before the mechanism was general enough to stop it. A route array built by a spread (`children: [...adminRoutes]`) was not followed, so the routes it carries were minted at the project root and links to them matched nothing. ghostfolio mounts its user administration screen with Angular's `matcher` property rather than `path`:

```
{ component: GfAdminUsersComponent,
matcher: usersMatcher, ...}
```

where `usersMatcher` consumes a URL whose first segment is `users`. Neither tool read the `matcher` property at all, so `/admin/users` appeared in no route set, and the previous round of this chapter published it as the one dead link it had confirmed by hand — the hand check having searched the application for `path: 'users'`, which is not how that route is spelled. alfresco declares `nodes/:nodeId` and loads its children through a tsconfig `paths` alias, which neither tool resolved, so `/nodes/:nodeId/rules` was absent from both route sets and two live links to it were reported as dead. All three are now read. More to the point, both tools now record the holes they cannot read — a matcher route, an unresolvable lazy boundary, a path expression that is not a literal — and no claim that a path is undeclared is counted inside one. The discipline is what generalises; the three fixes are not.

A prefix is not a target. The route-set test read only the first quoted segment of a commands array, so `['/nodes', id, 'rules']` was tested as the path `/nodes`, which alfresco declares no route at while `/nodes/:nodeId/rules` is exactly what it does declare. The whole array is now read as a pattern, its computed segments as holes, and matched against the declared routes pattern to pattern. That correction cuts both ways: it cleared alfresco's two candidates and it found ten more sites in mifos that the first-segment test had passed over.

What survives all four corrections is this. Of the 165 sites a catch-all route answers, 0 come from an application whose route set is a lower bound and whose addresses no measurement can decide, 23 have a target the framework's own configuration serves with a screen — a defect, but the extractor's — 19 a target it matches with a route that places no screen, which could never have had a node, and 0 a target it answers with a redirect. none name a route the application declares as a screen and the extractor minted no node for, none name a route it declares as a *path prefix*, 0 address a subtree the oracle could not open, 2 are a pattern with a hole where the first segment should be and so name no single address, 18 are a relative target the analysis had no base to resolve, 12 name the application root, for 1 the record names

no target at all, so nothing is established about where it points, and 68 sit outside the directory the measurement is scoped to and are the subject of the paragraph above; 22 remain. Of the 4 unexplained sites whose target named no route, 0 are again a relative target with no base, 0 address an unreadable subtree and none come from an application whose route set is a lower bound at all; 4 remain. Those two residuals are the dead-link candidates: 26 sites at 24 places in the source, 22 distinct URLs, in 2 applications — bitwarden, mifos. The count is of sites rather than of defects: one wrong prefix written into a shared template is one mistake and several sites, and one site resolved against several owning routes is one place to go and look and several targets. Every category in the enumeration above except the last of each arm is a limit of one of the two tools rather than a defect of an application, which is the proportion worth remembering about this kind of finding: the residual is what is left after the tools stop accusing the applications of their own blind spots.

One of those categories used to be unsettled, and is now measured. A route the application declares as a path prefix answers no URL of its own unless it also declares an empty-path child, and the previous round could not say which of the sites it excused on that ground addressed a prefix the application really answers. The framework's own configuration says, per address: of the 19 sites now excused on that ground, every one has a target the framework matches with a route that places no screen of its own. A navigation to one of them, mifos's `/collections`, activates a last route carrying no component at all, so the address answers with the application's chrome and an empty outlet — which is what the exclusion claimed all along, and is now a measurement rather than an inference.

It is a candidate list rather than a verdict, because the preceding four corrections are evidence that the tools' blind spots are not yet all known, and a route both the extractor and the oracle fail to read looks, from the outside, exactly like a route that does not exist. What can be said is narrower than the previous round claimed. Each candidate was checked against the application's own route files by hand, which is how the `appusers`, `manage-jobs` and `configurations` mismatches above are quoted; no candidate was checked by navigating to it in a running application, which is the only check that would settle one. Half of the objection has since been answered, and not by the route files. Every candidate's target is put to the route configuration the framework itself holds, read out of the running application by the check of Section A.5, so the premise a dead-link claim rests on — that the application mounts nothing at that address — no longer rests on two readings of the same files. The classification that premise uses was itself held against what the framework does, on 41 navigated addresses, of which it agrees with 41. That is what keeps the census from being empty: both applications it draws from declare part of their route set unread, which by the rule above would suppress every candidate they carry. What is still unchecked is the other premise, that the link is reached at run time at all, and one step below it: a target is matched against the framework's patterns rather than navigated to one address at a time, so a candidate's own URL has not been through the recogniser. What the method contributes is not the verdict but the list: a static transition graph puts every such candidate on one page, with a file and a line each, instead of leaving them to be met at run time.

A.5 Asking the running framework

Every result so far rests on two readings of the same route files. The witness check tests a must edge's destination against the independent parser's route set, and Section 4.3 states the condition under which that test is vacuous: where both tools read a route table at the wrong prefix, they agree on a wrong address and the check passes. Agreement between two readers of one text is evidence only to the extent that the readers can differ. This section reports a third reading that does not read the text at all.

A.5.1 How the framework was asked

Each application was built in its development configuration and loaded in a headless browser. Once it had bootstrapped, the live `Router` was found through Angular's debug surface and its route configuration read directly. Every lazily loaded subtree was expanded by calling the application's own `loadChildren` and taking the routes out of whatever it resolved to: the array itself for a standalone subtree, and the route providers of the module for one that loads an `NgModule`. Nothing in the procedure parses a route file. The answer is the configuration the framework holds, produced by the application's own code, so where it disagrees with both static readers the disagreement cannot be an artefact of a reading they share.

No server was run. The method needs the application to boot, not to work: an address is counted as mounted when the router's configuration places a component there on the primary outlet, whether or not a guard would admit a visitor or a resolver would find data. All 6 applications bootstrapped and 1759 route entries were read, with 0 lazily loaded subtrees left unexpanded and 0 applications raising an uncaught error. 2 logged errors to the console — failed requests to the server that is not there, for the most part — which is expected and does not bear on the route configuration, since the configuration is assembled before any of those requests is made. 1 route in the corpus decides its address through a `UrlMatcher`; that route and anything beneath it have no address any of the three readers can resolve to a string, so they are outside both sides of the comparison rather than filed under the parent's address. Table 5.19 reports the result.

Reading a configuration is itself a reading, and the one this comparison depends on is which of its entries answer an address with a screen. That reading is checked against what the framework does. The harness navigates a running application to an address and records the recogniser's verdict — the event Angular emits when a URL has matched, which fires before any guard runs, so a guard sending every visitor to a sign-in page does not hide what was matched. Over 6 applications and 42 addresses, chosen to include every address this chapter names, the classification taken from the configuration agrees with the navigation on 41 of the 41 it decides, and declines to decide 1, which is the address the `UrlMatcher` route claims. The comparison of Table 5.19 does not use that classification — it decides for itself which entries answer an address — so the same navigations are held against its own list as well, on the two implications that bind it: an address the framework serves with

a screen it must hold, and an address answered only by the catch-all it must not. That agrees on 31 of 31. The addresses are those this chapter reasons about and not a sample of the corpus: the 251 screens the extractor does not mint are 42 navigations away from being individually checked, and are not claimed to have been. Two of its answers are worth naming because the comparison turns on them. An address whose route carries children places no screen of its own: a navigation to mifos's `/collections` activates a last route with no component at all, so the address answers with the application's chrome and an empty outlet. And an application with a catch-all answers every address, so the configuration mentioning an address is no evidence that anything is mounted there — in mifos a URL that matches nothing reaches a not-found component, and in bitwarden and kubernetes/dashboard it is redirected to a screen.

A.5.2 What the framework mounts and the extractor does not

The other direction is not symmetric with the first, and the thesis does not treat it as such. A screen the extractor does not mint costs recall; the graph says less than it could. An address it mints that nothing mounts would be a claim about an application that is false. The corpus holds 251 of the first and 0 of the second.

Of the 251, 242 are one construct in ghostfolio. Its product comparison pages are not written down: a list of competitor records is mapped to routes and spread into the table, and each path is a template string over a field of the record. The extractor reads the table, mints the parent, and declares the spread a route source it could not read.

5 are in mifos, and they are one construct as well: its users module holds two route tables, one for each identity provider the deployment may use, and chooses between them with `!environment.OIDC.oidcServerEnabled`. That constant is not fixed by the sources. It is computed from `window.env`, injected into the page at deployment time, so no reader of the code can say which of the two tables the application mounts, and the extractor declares the subtree unread. The two tables happen to declare the same five addresses with different components, and reading either would have named those five addresses correctly — which is what the extractor used to do, by walking a table the module does not register under the prefix at all. That it arrived at the right addresses was an accident of this application: the same reading gives every prefix every table a file holds, and where two tables differ it mints the cross product. The addresses are lost here and the loss is declared, which is the exchange this analysis is built to make.

3 are in alfresco and no two of them share a cause. Two are outside the directory the measurement scopes to, though for different reasons: `/login` is declared by the shell application that composes the measured library, and `/view/authentication-confirmation` by an installed package that shell provides. The second is outside it by a design choice the extractor states — it does not follow a dependency into a package directory, because a package declares no screen of the application under measurement.

The third is inside it, and `/about` is not declared in TypeScript at all. The library ships `about.plugin.json`, whose single entry is

```
{ "id":  "app.about", "path":  "about", "layout":  "app.layout.main",
  "component":  "app.about.component" }
```

and an extension registry binds the identifier `app.about.component` to a class at run time. The route exists in data; no reader of the application's code can see it, and the extractor's analysis is over the code. The probe sees it because the framework assembles the table from the manifest before the probe reads the router. This construct and mifos's runtime-selected table are both recorded in the approximations of Section 6.3. alfresco's route set is a declared lower bound on other grounds, so no claim of completeness is made over it either way.

The remaining 1 is bitwarden's vault, whose route is produced by a helper that chooses between two components by feature flag.

One construct in ghostfolio therefore accounts for almost all of this column, and it is worth saying what that means and what it does not. It does not mean the graph is missing those screens by accident: the construct is one spread, the extractor says it could not read it, and the 242 pages behind it are generated entries that differ only in a path segment and a data key. It does mean that the cost of a declared blind spot can be far larger than the number of blind spots suggests, which is a thing a count of notes cannot show and this comparison can.

A.5.3 Nothing is missing that was not declared

0 applications hold a screen the framework mounts and the extractor has no node for without the extractor having said that part of its route set was beyond it. Every application in Table 5.19 that has a missing screen is an application that declared one. The correspondence is per application and not per cause, which is the weaker of the two readings and the only one measured here: alfresco declares that it could not read ten spreads, and one of its 3 missing screens, `/about`, has nothing to do with a spread — it is declared in a JSON manifest and in no route file at all. What the measurement supports is that no application is missing a screen while asserting that its route set is whole — not that every missing screen is behind the construct its application named. Until this measurement the thesis could assert neither.

On this corpus the correspondence happens to hold in the other direction as well: 0 applications declare part of the route set unread and turn out to be missing nothing, and 2 declare nothing and are missing nothing. That is not a property of the analysis and is not offered as one. A declaration costs the route set whatever the construct behind it happened to carry, and one that cost nothing is a tool being careful rather than a tool being wrong; mifos's declaration cost nothing until this round, when the extractor stopped reaching the addresses behind it through a table the module does not register, and the same note then stood for five lost screens. The direction that matters is the other one: a screen missing with no declaration would be a tool asserting a completeness it does not have, and there are none of those. It also changes what the dead-link census of Section 5.6 can rest on. That census

used to suppress every candidate from an application whose route set is a declared lower bound, and a per-application licence was added to lift the suppression where this comparison found the declared set complete after all. On the figures above that licence lifts the suppression for 0 applications: both applications the census draws from are missing a screen of their own — mifos 5 and bitwarden 1 — so neither can be licensed. A licence of that shape asks a harder question than the census needs — whether a whole route set is complete — and loses the census of any application that misses one screen anywhere. Section 5.6 therefore asks the question per candidate instead, of the same framework configuration: a link whose target the framework serves nothing at is a dead link whether or not the rest of the route set was read, and one whose target it does serve is not a dead link however the extractor read it.

The correspondence did not hold when this check was first run, and it was not a near miss. Two applications with unread route sources were asserting complete ones: alfresco, whose document viewer is assembled by a helper call spread into the table, and bitwarden, whose vault route is built the same way. Each spread was skipped without a word. Bitwarden's silence had already been paid for, because with its caveat absent that application's sites entered the dead-link census — on a route set that was missing a screen. Both readers now record a spread they cannot follow as a route source they did not read. Their rules for doing so are not the same: the extractor declares the spread whose expression it cannot resolve to an array, the independent parser declares every spread, since it follows none. The second is the more conservative of the two and neither is silent, which is what the property requires.

A.6 What a route table's evidence does not establish

One assumption underlies every approximation in the reader of route tables, and the others are instances of it. A route table that no site in the application claims — no `loadChildren` names it, no spread or `children` carries it, no registration call takes it — is read as a table the application mounts at its root. The assumption is what lets either tool find an application's routes however they are declared, and it is an over-approximation: a table registered nowhere the compiled build reaches is mounted at no address at all, and reading it at the root puts its entries into the graph as screens. It is taken deliberately, because the alternative loses the routes of every application whose root registration neither tool recognises, and the cases below are the places where it has been narrowed rather than abandoned.

Three further approximations in that reader share one shape, and they are listed together because each was found by attacking a repair of the previous one. All three are declared in the tool's own notes; none was closed, and the reason in each case is that closing it would refuse a construct the corpus actually uses.

The first concerns which file owns a lazily loaded route array. An Angular module loaded through `loadChildren` usually keeps its routes in a separate routing module that it imports, so the reader follows one import to find them. Electing that owner no

longer trusts the *shape* of an array — a menu or breadcrumb configuration carrying `path` properties is never elected, and a file claimed beside an elected owner is reported as an incomplete route set rather than dropped in silence. But a `Routes`-typed array is evidence that its author declared it to some router, never that *this* application mounts it. A sibling application's typed table, reached through a workspace alias and used as data, is therefore still elected and still minted under the lazy prefix, with a deterministic edge into it. Requiring the elected owner to lie inside the application directory closes that case and simultaneously refuses a lazily loaded route array that legitimately lives in a shared library outside it, which is a pattern the corpus does use. No corpus application distinguishes the two, so the gap is left open and declared rather than traded for a construct that is known to occur.

The second is the same boundary one step earlier: the `loadChildren` specifier itself is not bounded, so a loader whose import resolves into another project's alias root mounts that project's table under this application's prefix. The obvious guard — requiring the loaded file to belong to the same project root as the route that loads it — was applied experimentally and refuses a lazily loaded module that one corpus application keeps in an alias root, turning several of its declared screens into declared blind spots and lowering its reported coverage. By path alone the analysis cannot tell a shared lazy library from another application's route table, and that is the honest statement of the limit.

The third is a reading, not a defect. A routing module imported by two lazily loaded modules and loaded by no route is read as a table of the project root rather than as children of both importers. The alternative reading matches Angular more closely but lets one route adopt another's table, which is how the first approximation above was reached; the conservative reading is taken, and it costs the affected routes their prefix.

A fourth was found by asking what the test that keeps a lazy route from adopting the application's root table actually read, and it is reported here as a repair rather than as a limitation, because what the asking produced was a measurement no reading of the code would have given. What the test read was the candidate file's own call to `forRoot` on `RouterModule`, Angular's own discriminator for a root table, which is why it was sound where it fired. It is also why it fired nowhere. An application that registers its root with the standalone `provideRouter` API is not recognised at all, and two of the six have no `forRoot` call anywhere; an application that declares its root array in one file and registers it in another — ghostfolio and kubernetes/dashboard both do — is recognised in the registering file, which holds no route, and not in the file a lazily loaded module could adopt. Instrumenting the predicate made the limit exact rather than arguable: it was asked 698 times across the six applications in the independent parser and 2798 times in the extractor, and answered yes on none of them. A guard that never fires is worse than no guard, because a commit message and a chapter credit it with a property nothing has shown it to have.

Both tools now mark root tables per *array*, taken from the argument of either registration API and resolved through the name it is nearly always written as, which is what makes the question answerable in the shape applications actually write.

Several repairs of the same reader stand on constructed fixtures and on nothing else, and that is worth saying plainly rather than leaving to be discovered. A file holding a menu beside an imported routing module, a `forChild` given a table declared in another file, a conditional resolved inside a registration call, a root table a spread elsewhere also carries, and a wrapper that takes its own path as a parameter: each of these was reproduced, each produced either an address the application does not mount or a declared loss where nothing was lost, and each is now refused. None of the five occurs in this corpus. Every figure in Chapter 5 is therefore identical with and without them, so no result here is evidence that they work — their evidence is the fixtures, which fail when the rule each pins is removed on its own. The same holds of the refusals in the independent parser — the test that stops a lazy route adopting a table another route owns is asked 174 times in the extractor and 3512 in the parser and answers yes in neither — so for those the corpus is evidence about the reading the two tools share and not about the guards that bound it. The per-array root-table test is the exception, and the distinction matters: it is asked a few hundred times and answers yes eight times in each reader, and one of those answers is what mints alfresco's `/rules`. A rule the corpus exercises and a rule only a fixture exercises are different kinds of claim, and this chapter says which each is. The reverse also holds and is the reason for the paragraph: a corpus of six applications is not a sample that makes an analysis sound, and five constructs it happens not to contain were enough to break two of the properties this thesis claims. One further case came with it: a table a feature library both hands to `provideRouter` and exports for lazy loading is mounted at the root *and* under the prefix that loads it, so a claim on its file may not cover both mounts — the root scan now mints a root-registered array whatever claims its file, which is alfresco's `/rules`.

A fifth is the mirror of the first, and worth stating because it is where a conservative refusal becomes an over-approximation. When the only site that loads a route table lies in a test specification, the analysis declines the claim and scans the table from the project root, so its routes are reported at the application's root address. The guard establishes that a site the walk cannot reach may not justify suppressing the root scan; it does not establish that the application mounts the table there. That makes it a further instance of the unclaimed top-level-`Routes` over-approximation declared above, and it occurs nowhere in this corpus.

A sixth is the named outlet, and its history in this work is the clearest case of the difference between declaring an approximation and being sound over it. A route carrying `outlet: 'name'` is reached as `(name:path)`, so it contributes no screen on the primary outlet. The extractor refused such a route from the start — but only the route that carries the property: where a named outlet opened a `children` subtree, the routes beneath it were still assembled against the primary path and minted there. alfresco mounts its document viewer that way, and the graph held `/view/:nodeId` and `/search-libraries/view/:nodeId`, two addresses that application serves only through the viewer outlet. The independent route parser read the subtree the same way, so coverage was 100 % over a set holding both, and no comparison between the two tools could show the gap. This was written down as an open case, on the reasoning that an approximation stated is an approximation a consumer can price.

That reasoning was wrong, and the runtime check of Section A.5 is what showed it. A consumer reading the graph finds a node at `/view/:nodeId`; a navigation to that address in the built application is answered by the catch-all route. The declaration did not make the node true, and the must-tier property admits no exception that a sentence can buy back. An outlet is inherited, so nothing below a named-outlet route has a primary address either: the extractor now carries outlet context down the walk and mints no screen for such a subtree. What remains is a limitation on what the graph contains — a screen reached only through a named outlet is not an element of the node set, and the transitions into it are not in the edge set — which is a statement about recall and is the kind of approximation a declaration can honestly cover.

One attribution of a blind spot to the component it hides is a filename heuristic and is labelled as one. Where a route prefix the analysis could not follow has literal segments, a component whose path carries all of them as whole directory names is reported as hidden behind that prefix. The heuristic answers the question a reader asks — which screens are missing because of this hole — and it is wrong in two directions that the harness now states rather than hides. A route prefix does not determine a directory name, so the components behind a hole whose directory is named differently are not attributed to it and are reported only as having no node; and a prefix made entirely of parameters has no literal segment, so it is attributed to no component at all. An earlier version compared the prefix to the path as a bare substring, which read `/cluster` into `resourcelist/clusterrole/component.ts` and would have replaced the extractor's own true note about that file with a tool blind spot that does not cover it. No count of the rows that satisfied the broader predicate is given, because the figure depends on which population it is taken over and nothing in this thesis rests on it. What does matter is why the attribution reaches the published reason table in neither form, and the obvious account of that is wrong: it is not that some earlier test answers those rows first. The attribution is asked of all 27 unaccounted rows in the corpus and declines every one of them on its own first two conditions — 15 because the owning file is not a component and the rest because the graph already witnesses an edge from that file — so the comparison this paragraph is about is never reached on this corpus at all. What is recorded here is therefore a property of the rule and not of any figure in Chapter 5. The narrower rule is still the one to state, because the broader one was false wherever it was asked.

Bibliography

[1] Manuel Alabor and Markus Stolze. Debugging of RxJS-based applications. In *Proceedings of the 7th ACM SIGPLAN International Workshop on Reactive and Event-Based Languages and Systems (REBLS)*, pages 15–24. ACM, 2020.

[2] Lars Ole Andersen. *Program Analysis and Specialization for the C Programming Language*. PhD thesis, DIKU, University of Copenhagen, 1994. DIKU report 94/19.

[3] Anastasios Antoniadis, Nikos Filippakis, Paddy Krishnan, Raghavendra Ramesh, Nicholas Allen, and Yannis Smaragdakis. Static analysis of Java enterprise applications: Frameworks and caches, the elephants in the room. In *Proceedings of the 41st ACM SIGPLAN Conference on Programming Language Design and Implementation (PLDI)*, pages 794–807, 2020.

[4] Robert S. Arnold and Shawn A. Bohner. Impact analysis – towards a framework for comparison. In *Proceedings of the Conference on Software Maintenance (CSM)*, pages 292–301. IEEE Computer Society Press, 1993.

[5] David F. Bacon and Peter F. Sweeney. Fast static analysis of C++ virtual function calls. In *Proceedings of the 11th ACM SIGPLAN Conference on Object-Oriented Programming, Systems, Languages, and Applications (OOPSLA)*, pages 324–341, 1996.

[6] Engineer Bainomugisha, Andoni Lombide Carreton, Tom Van Cutsem, Stijn Mostinckx, and Wolfgang De Meuter. A survey on reactive programming. *ACM Computing Surveys*, 45(4):52:1–52:34, 2013.

[7] Herman Banken, Erik Meijer, and Georgios Gousios. Debugging data flows in reactive programs. In *Proceedings of the 40th International Conference on Software Engineering (ICSE)*, pages 752–763. ACM, 2018.

[8] Ira D. Baxter, A. Yahin, L. Moura, M. Sant'Anna, and L. Bier. Clone detection using abstract syntax trees. In *Proceedings of the International Conference on Software Maintenance (ICSM)*, pages 368–377. IEEE Computer Society, 1998.

[9] Carlo Bellettini, Alessandro Marchetto, and Andrea Trentini. WebUml: Reverse engineering of web applications. In *Proceedings of the 2004 ACM Symposium on Applied Computing (SAC)*, pages 1662–1669, 2004.

[10] Gavin Bierman, Martín Abadi, and Mads Torgersen. Understanding TypeScript. In Richard Jones, editor, *ECOOP 2014 – Object-Oriented Programming*, volume 8586 of *Lecture Notes in Computer Science*, pages 257–281, Berlin, Heidelberg, 2014. Springer.

[11] Justus Bogner and Manuel Merkel. To type or not to type? A systematic comparison of the software quality of JavaScript and TypeScript applications on GitHub. In *Proceedings of the 19th International Conference on Mining Software Repositories (MSR)*, pages 658–669. ACM, 2022.

[12] Shawn A. Bohner and Robert S. Arnold, editors. *Software Change Impact Analysis*. IEEE Computer Society Press, Los Alamitos, CA, USA, 1996.

[13] Miao Chen, Tengfei Tu, Hua Zhang, Qiaoyan Wen, and Weihang Wang. Jasmine: A static analysis framework for Spring core technologies. In *Proceedings of the 37th IEEE/ACM International Conference on Automated Software Engineering (ASE)*, pages 1–13. ACM, 2022.

[14] Sen Chen, Lingling Fan, Chunyang Chen, Ting Su, Wenhe Li, Yang Liu, and Lihua Xu. StoryDroid: Automated generation of storyboard for Android apps. In *Proceedings of the 41st International Conference on Software Engineering (ICSE)*, pages 596–607, 2019.

[15] Gregory H. Cooper and Shriram Krishnamurthi. Embedding dynamic dataflow in a call-by-value language. In Peter Sestoft, editor, *Programming Languages and Systems, 15th European Symposium on Programming (ESOP 2006)*, volume 3924 of *Lecture Notes in Computer Science*, pages 294–308, Berlin, Heidelberg, 2006. Springer.

[16] Patrick Cousot and Radhia Cousot. Abstract interpretation: A unified lattice model for static analysis of programs by construction or approximation of fixpoints. In *Proceedings of the 4th ACM SIGACT-SIGPLAN Symposium on Principles of Programming Languages (POPL)*, pages 238–252, 1977.

[17] Jeffrey Dean, David Grove, and Craig Chambers. Optimization of object-oriented programs using static class hierarchy analysis. In Mario Tokoro and Remo Pareschi, editors, *ECOOP'95 – Object-Oriented Programming*, volume 952 of *Lecture Notes in Computer Science*, pages 77–101. Springer, 1995.

[18] Guillaume Demarty, Fabien Maronnaud, Gabriel Le Breton, and Sylvain Hallé. SiteHopper: Abstracting navigation state machines for the efficient verification of web applications. In *Web Services and Formal Methods (WS-FM 2012)*, volume 7843 of *Lecture Notes in Computer Science*, pages 103–117. Springer, 2013.

[19] Richard A. DeMillo, Richard J. Lipton, and Frederick G. Sayward. Hints on test data selection: Help for the practicing programmer. *Computer*, 11(4):34–41, 1978.

[20] Joscha Drechsler, Guido Salvaneschi, Ragnar Mogk, and Mira Mezini. Distributed REScala: An update algorithm for distributed reactive programming. In *Proceedings of the 2014 ACM International Conference on Object Oriented Programming Systems Languages & Applications (OOPSLA)*, pages 361–376. ACM, 2014.

[21] Conal Elliott and Paul Hudak. Functional reactive animation. In *Proceedings of the 2nd ACM SIGPLAN International Conference on Functional Programming (ICFP)*, pages 263–273, 1997.

[22] Asger Feldthaus and Anders Møller. Checking correctness of TypeScript interfaces for JavaScript libraries. In *Proceedings of the 2014 ACM International Conference on Object Oriented Programming Systems Languages & Applications (OOPSLA)*, pages 1–16. ACM, 2014.

[23] Asger Feldthaus, Max Schäfer, Manu Sridharan, Julian Dolby, and Frank Tip. Efficient construction of approximate call graphs for JavaScript IDE services. In *Proceedings of the 35th International Conference on Software Engineering (ICSE)*, pages 752–761, 2013.

[24] Martin Fowler. Inversion of control containers and the dependency injection pattern. `https://martinfowler.com/articles/injection.html`, January 2004.

[25] Zheng Gao, Christian Bird, and Earl T. Barr. To type or not to type: Quantifying detectable bugs in JavaScript. In *Proceedings of the 39th IEEE/ACM International Conference on Software Engineering (ICSE)*, pages 758–769. IEEE, 2017.

[26] Google. Angular documentation: Routing. `https://angular.dev/guide/routing`, 2026. Accessed September 2026.

[27] David Grove and Craig Chambers. A framework for call graph construction algorithms. *ACM Transactions on Programming Languages and Systems*, 23(6):685–746, 2001.

[28] May Haydar, Alexandre Petrenko, and Houari Sahraoui. Formal verification of web applications modeled by communicating automata. In *Formal Techniques for Networked and Distributed Systems (FORTE)*, volume 3235 of *Lecture Notes in Computer Science*, pages 115–132, 2004.

[29] Simon Holm Jensen, Anders Møller, and Peter Thiemann. Type analysis for JavaScript. In Jens Palsberg and Zhendong Su, editors, *Static Analysis, 16th International Symposium, SAS 2009*, volume 5673 of *Lecture Notes in Computer Science*, pages 238–255, Berlin, Heidelberg, 2009. Springer.

[30] Yue Jia and Mark Harman. An analysis and survey of the development of mutation testing. *IEEE Transactions on Software Engineering*, 37(5):649–678, 2011.

[31] Carlos E. Jimenez, John Yang, Alexander Wettig, Shunyu Yao, Kexin Pei, Ofir Press, and Karthik Narasimhan. SWE-bench: Can language models resolve real-world GitHub issues? In *The Twelfth International Conference on Learning Representations (ICLR)*, 2024.

[32] Ralph E. Johnson and Brian Foote. Designing reusable classes. *Journal of Object-Oriented Programming*, 1(2):22–35, June/July 1988.

[33] René Just, Darioush Jalali, Laura Inozemtseva, Michael D. Ernst, Reid Holmes, and Gordon Fraser. Are mutants a valid substitute for real faults in software testing? In *Proceedings of the 22nd ACM SIGSOFT International Symposium on Foundations of Software Engineering (FSE)*, pages 654–665. ACM, 2014.

[34] Eirini Kalliamvakou, Georgios Gousios, Kelly Blincoe, Leif Singer, Daniel M. German, and Daniela Damian. The promises and perils of mining GitHub. In *Proceedings of the 11th Working Conference on Mining Software Repositories (MSR)*, pages 92–101, 2014.

[35] Eirini Kalliamvakou, Georgios Gousios, Kelly Blincoe, Leif Singer, Daniel M. German, and Daniela Damian. An in-depth study of the promises and perils of mining GitHub. *Empirical Software Engineering*, 21(5):2035–2071, 2016.

[36] Iva Kertusha, Gebremariem Assress, Onur Duman, and Andrea Arcuri. A survey on web testing: On the rise of AI and applications in industry, 2025. arXiv:2503.05378.

[37] Gary A. Kildall. A unified approach to global program optimization. In *Proceedings of the 1st Annual ACM SIGACT-SIGPLAN Symposium on Principles of Programming Languages (POPL)*, pages 194–206, 1973.

[38] Łukasz Kurant. Static components dependency graph detection with evaluation metrics in React.js projects. In *Communication Papers of the 20th Conference on Computer Science and Intelligence Systems (FedCSIS)*, volume 45 of *Annals of Computer Science and Information Systems*, pages 127–134, 2025.

[39] Duling Lai and Julia Rubin. Goal-driven exploration for Android applications. In *Proceedings of the 34th IEEE/ACM International Conference on Automated Software Engineering (ASE)*, pages 115–127, 2019.

[40] Rodrigo Laigner, Diogo Mendonça, Alessandro Garcia, and Marcos Kalinowski. Cataloging dependency injection anti-patterns in software systems. *Journal of Systems and Software*, 184:111125, 2022.

[41] Davy Landman, Alexander Serebrenik, and Jurgen J. Vinju. Challenges for static analysis of Java reflection – literature review and empirical study. In *Proceedings of the 39th IEEE/ACM International Conference on Software Engineering (ICSE)*, pages 507–518. IEEE, 2017.

[42] Kim G. Larsen and Bent Thomsen. A modal process logic. In *Proceedings of the Third Annual Symposium on Logic in Computer Science (LICS)*, pages 203–210, 1988.

[43] Steffen Lehnert. A taxonomy for software change impact analysis. In *Proceedings of the 12th International Workshop on Principles of Software Evolution and the 7th Annual ERCIM Workshop on Software Evolution (IWPSE-EVOL)*, pages 41–50. ACM, 2011.

[44] Jiawei Li, Jiahao Liu, Jian Mao, Jun Zeng, and Zhenkai Liang. UI-CTX: Understanding UI behaviors with code contexts for mobile applications. In *Network and Distributed System Security Symposium (NDSS)*, 2025.

[45] Changlin Liu, Hanlin Wang, Tianming Liu, Diandian Gu, Yun Ma, Haoyu Wang, and Xusheng Xiao. ProMal: Precise window transition graphs for Android via synergy of program analysis and machine learning. In *Proceedings of the 44th International Conference on Software Engineering (ICSE)*, pages 1755–1767, 2022.

[46] Zhe Liu, Chunyang Chen, Junjie Wang, Mengzhuo Chen, Boyu Wu, Xing Che, Dandan Wang, and Qing Wang. Make LLM a testing expert: Bringing human-like interaction to mobile GUI testing via functionality-aware decisions. In *Proceedings of the IEEE/ACM 46th International Conference on Software Engineering (ICSE)*, pages 1–13. ACM, 2024.

[47] Benjamin Livshits, Manu Sridharan, Yannis Smaragdakis, Ondřej Lhoták, J. Nelson Amaral, Bor-Yuh Evan Chang, Samuel Z. Guyer, Uday P. Khedker, Anders Møller, and Dimitrios Vardoulakis. In defense of soundiness: A manifesto. *Communications of the ACM*, 58(2), 2015.

[48] Magnus Madsen, Benjamin Livshits, and Michael Fanning. Practical static analysis of JavaScript applications in the presence of frameworks and libraries. In *Proceedings of the 2013 9th Joint Meeting on Foundations of Software Engineering (ESEC/FSE)*, pages 499–509. ACM, 2013.

[49] Magnus Madsen, Frank Tip, and Ondřej Lhoták. Static analysis of event-driven Node.js JavaScript applications. In *Proceedings of the 2015 ACM SIGPLAN International Conference on Object-Oriented Programming, Systems, Languages, and Applications (OOPSLA)*, pages 505–519. ACM, 2015.

[50] Ali Mesbah, Arie van Deursen, and Stefan Lenselink. Crawling Ajax-based web applications through dynamic analysis of user interface state changes. *ACM Transactions on the Web*, 6(1):1–30, 2012.

[51] Amin Milani Fard and Ali Mesbah. Feedback-directed exploration of web applications to derive test models. In *2013 IEEE 24th International Symposium on Software Reliability Engineering (ISSRE)*, pages 278–287, 2013.

[52] Shabnam Mirshokraie, Ali Mesbah, and Karthik Pattabiraman. Efficient JavaScript mutation testing. In *Proceedings of the 2013 IEEE Sixth International Conference on Software Testing, Verification and Validation (ICST)*, pages 74–83. IEEE, 2013.

[53] Shabnam Mirshokraie, Ali Mesbah, and Karthik Pattabiraman. Guided mutation testing for JavaScript web applications. *IEEE Transactions on Software Engineering*, 41(5):429–444, 2015.

[54] Flemming Nielson, Hanne Riis Nielson, and Chris Hankin. *Principles of Program Analysis*. Springer, Berlin, Heidelberg, 1999.

[55] Frolin S. Ocariza, Karthik Pattabiraman, and Ali Mesbah. Detecting inconsistencies in JavaScript MVC applications. In *Proceedings of the 37th IEEE/ACM International Conference on Software Engineering (ICSE)*, pages 325–335. IEEE, 2015.

[56] Naito Oshima and Tomoji Kishi. Model checking method for SPA page transition based on component-based framework. In *Proceedings of the International Conference on Software Engineering and Knowledge Engineering (SEKE 2018)*. KSI Research, 2018.

[57] Mike Papadakis, Marinos Kintis, Jie Zhang, Yue Jia, Yves Le Traon, and Mark Harman. Mutation testing advances: An analysis and survey. In *Advances in Computers*, volume 112, pages 275–378. Elsevier, 2019.

[58] Renaud Pawlak, Martin Monperrus, Nicolas Petitprez, Carlos Noguera, and Lionel Seinturier. SPOON: A library for implementing analyses and transformations of Java source code. *Software: Practice and Experience*, 46(9):1155–1179, 2016.

[59] Upsorn Praphamontripong and Jeff Offutt. Applying mutation testing to web applications. In *Proceedings of the 2010 Third International Conference on Software Testing, Verification, and Validation Workshops (ICSTW)*, pages 132–141. IEEE, 2010.

[60] Remix Run. React router documentation, version 8. `https://reactrouter.com/`, 2026. Version 8.4.0. Accessed 5 October 2026.

[61] Xiaoxia Ren, Fenil Shah, Frank Tip, Barbara G. Ryder, and Ophelia Chesley. Chianti: A tool for change impact analysis of Java programs. In *Proceedings of the 19th Annual ACM SIGPLAN Conference on Object-Oriented Programming, Systems, Languages, and Applications (OOPSLA)*, pages 432–448. ACM, 2004.

[62] Filippo Ricca and Paolo Tonella. Analysis and testing of web applications. In *Proceedings of the 23rd International Conference on Software Engineering (ICSE)*, pages 25–34, 2001.

[63] Gregor Richards, Francesco Zappa Nardelli, and Jan Vitek. Concrete types for TypeScript. In John Tang Boyland, editor, *29th European Conference on Object-Oriented Programming (ECOOP 2015)*, volume 37 of *Leibniz International Proceedings in Informatics (LIPIcs)*, pages 76–100, Dagstuhl, Germany, 2015. Schloss Dagstuhl – Leibniz-Zentrum für Informatik.

[64] Bachar Rima, Anas Shatnawi, and Abdelhak-Djamel Seriai. E2E test generation over a source-code-derived workflow space: An Angular case study. In *Software Engineering and Advanced Applications*, Lecture Notes in Computer Science, pages 334–351, Cham, 2026. Springer Nature Switzerland. Published online 27 August 2026; print volume dated 2027. The method is described in this thesis from the publisher abstract and the replication package; the full text was not available.

[65] Guido Salvaneschi and Mira Mezini. Debugging for reactive programming. In *Proceedings of the 38th International Conference on Software Engineering (ICSE)*, pages 796–807. ACM, 2016.

[66] Guido Salvaneschi, Sebastian Proksch, Sven Amann, Sarah Nadi, and Mira Mezini. On the positive effect of reactive programming on software comprehension: An empirical study. *IEEE Transactions on Software Engineering*, 43(12):1125–1143, 2017.

[67] Manu Sridharan, Shay Artzi, Marco Pistoia, Salvatore Guarnieri, Omer Tripp, and Ryan Berg. F4F: Taint analysis of framework-based web applications. In *Proceedings of the 2011 ACM International Conference on Object Oriented Programming Systems Languages and Applications (OOPSLA)*, pages 1053–1068. ACM, 2011.

[68] Stryker Mutator contributors. Stryker mutator: Mutation testing for JavaScript, TypeScript, C# and Scala. `https://stryker-mutator.io/`, 2026. Accessed 2026-10-21.

[69] Oksana Tkachuk and Sreeranga P. Rajan. Method and system to extract a navigation model for analysis of a web application, 2013. US Patent 8,402,319 B2, Fujitsu Limited.

[70] Chenxu Wang, Tianming Liu, Yanjie Zhao, Minghui Yang, and Haoyu Wang. LLMDroid: Enhancing automated mobile app GUI testing coverage with large language model guidance. In *Proceedings of the ACM on Software Engineering (FSE)*, 2025.

[71] Junjie Wang, Yuchao Huang, Chunyang Chen, Zhe Liu, Song Wang, and Qing Wang. Software testing with large language models: Survey, landscape, and vision. *IEEE Transactions on Software Engineering*, 50(4):911–936, 2024.

[72] Siyi Wang, Sinan Wang, Yujia Fan, Xiaolei Li, and Yepang Liu. Leveraging large vision-language model for better automatic web GUI testing. In *Proceedings of the 2024 IEEE International Conference on Software Maintenance and Evolution (ICSME)*, pages 125–137. IEEE, 2024.

[73] Hao Wen, Yuanchun Li, Guohong Liu, Shanhui Zhao, Tao Yu, Toby Jia-Jun Li, Shiqi Jiang, Yunhao Liu, Yaqin Zhang, and Yunxin Liu. AutoDroid: LLM-powered task automation in Android. In *Proceedings of the 30th Annual International Conference on Mobile Computing and Networking (MobiCom)*, pages 543–557. ACM, 2024.

[74] Rahulkrishna Yandrapally and Ali Mesbah. Fragment-based test generation for web apps. *IEEE Transactions on Software Engineering*, 2022. IEEE Xplore document 9765776.

[75] Hong Yul Yang, Ewan Tempero, and Hayden Melton. An empirical study into use of dependency injection in Java. In *Proceedings of the 19th Australian Conference on Software Engineering (ASWEC)*, pages 239–247. IEEE, 2008.

[76] John Yang, Carlos E. Jimenez, Alexander Wettig, Kilian Lieret, Shunyu Yao, Karthik Narasimhan, and Ofir Press. SWE-agent: Agent-computer interfaces enable automated software engineering. In *Advances in Neural Information Processing Systems 37 (NeurIPS 2024)*, pages 50528–50652, 2024.

[77] Shengqian Yang, Haowei Wu, Hailong Zhang, Yan Wang, Chandrasekar Swaminathan, Dacong Yan, and Atanas Rountev. Static window transition graphs for Android. *Automated Software Engineering*, 25(4):833–873, 2018.

[78] Shengqian Yang, Dacong Yan, Haowei Wu, Yan Wang, and Atanas Rountev. Static control-flow analysis of user-driven callbacks in Android applications. In *Proceedings of the 37th International Conference on Software Engineering (ICSE)*, pages 89–99, 2015.

[79] Shengqian Yang, Hailong Zhang, Haowei Wu, Yan Wang, Dacong Yan, and Atanas Rountev. Static window transition graphs for Android. In *Proceedings of the 30th IEEE/ACM International Conference on Automated Software Engineering (ASE)*, pages 658–668, 2015.

[80] Evan You and Eduardo San Martin Morote. Vue router documentation, version 5. `https://router.vuejs.org/`, 2026. Version 5.3.1. Accessed 5 October 2026.

[81] Fengji Zhang, Bei Chen, Yue Zhang, Jacky Keung, Jin Liu, Daoguang Zan, Yi Mao, Jian-Guang Lou, and Weizhu Chen. RepoCoder: Repository-level code completion through iterative retrieval and generation. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 2471–2484, Singapore, 2023. Association for Computational Linguistics.

[82] Tao Zhang, Fuzhong Hao, Yunfan Wang, Bo Zhang, and Guangwei Xie. VeriFlow: A framework for the static verification of web application access control via policy-graph consistency. *Electronics*, 14(18):3742, 2025.

[83] Carlos Zimmerle, Kiev Gama, Fernando Castor, and José Murilo Mota Filho. Mining the usage of reactive programming APIs: A study on GitHub and Stack Overflow. In *Proceedings of the 19th International Conference on Mining Software Repositories (MSR)*, pages 203–214. ACM, 2022.